


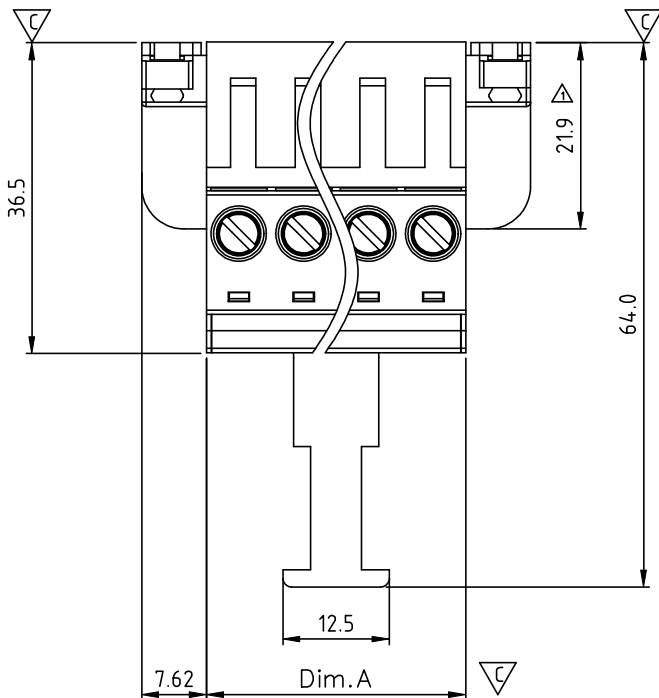

KTxx01x3xxxxG



No. OF POLES
03: 3 POLES
04: 4 POLES

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant (lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Any special item by customer request.
please contact sales department.

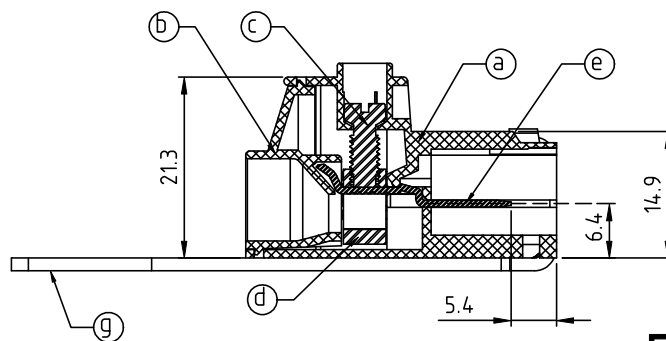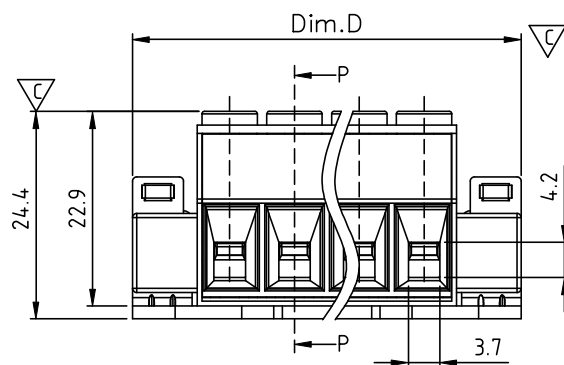

SECTION P-P

N = Number of poles

Dim.A	$N \times 7.62$
Dim.B	$(N-1) \times 7.62$
Dim.C	$(N+1) \times 7.62$
Dim.D	$(N+2) \times 7.62$

Poles	Tolerance
3P	± 0.20
4P	

SIGN	DATE	DESCRIPTION	APPROVER
△	12/08-15	Change the dimension from 32 to 21.9	Evan


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Terminal(housing) : PA66 (UL94V-0)
- Item ② Terminal(cover) : PA66 (UL94V-0) (ET 7.62)
- Item ③ Terminal screw : Steel Zinc plating " - " slot type (ET 7.62)
- Item ④ Clamp : Brass, Ni plated (ET 7.62)
- Item ⑤ Female contact : Copper. Bright Tin plated over Nickel plated
- Item ⑥ With flange Nut : Steel Zinc plating M3 (VC 7.62)
- Item ⑦ Steel: Steel t=1.50mm zinc plated.

Electrical

- Voltage rating: 600VAC
- Current rating: 41A
- Solid wire (AWG): 8-24
- Stranded wire(AWG): 8-24
- Torque: 9.0 Lb-In
- Screw: M3.5
- Wire strip length: 10-11mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension:

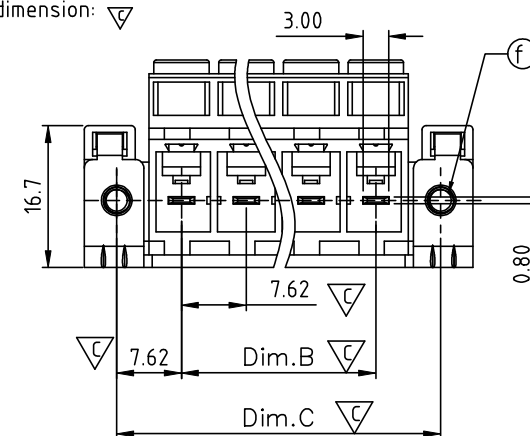

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KT 7.62 Series Flange With Nut (With handle) Only 3P & 4P						
PART NO.	KTxx01x3xxxxG			DWG NO.	8KT0017		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Evan 12/08-15	Aaron 2011.10.18		UNIT: mm	Tolerance	
					SCALE: NONE	X.X ±0.50	
						X.XX ±0.30	
						X° ±1°	
				SHEET: 01/01	REV.: C		