
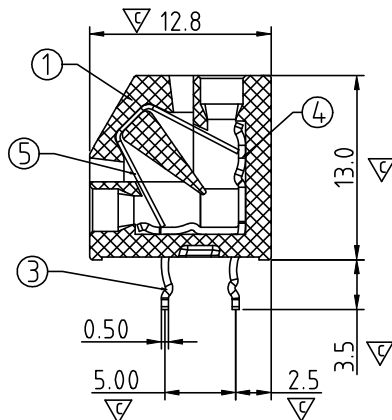
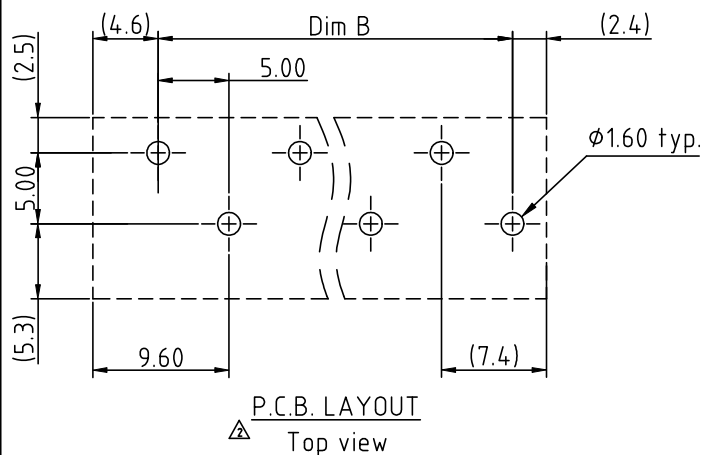
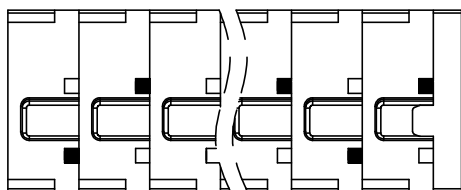
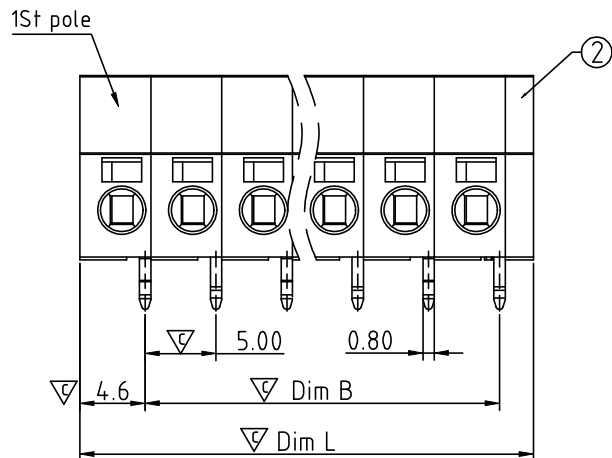


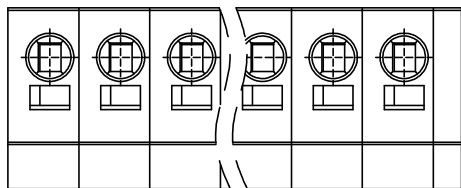

△ N=NUMBER OF POLES

Dim L	$N \times 5.0 + 2.0$
Dim B	$(N-1) \times 5.0$

POLES	Dim L	Dim B
2p-6p	± 0.15	± 0.15
8p-12p	± 0.20	± 0.20
14p-18p	± 0.25	± 0.25
20p-24p	± 0.30	± 0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	3/26'09	modify specification	JODY
△	12/17'13	update the drawing	Da cheng
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

● Item 1	Insulating body	Thermoplastic (UL94V-0)
● Item 2	Insulating cover	Thermoplastic (UL94V-0)
● Item 3	Contact on Center pin	Brass, Tin plated
● Item 4	Contact on Side	Brass, Tin plated
● Item 5	Spring clamp	Stainless steel

△ Electrical cULus △

- Voltage rating: 300VAC
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C

△ ● Soldering temperature: 260°C±5°C/5 Sec

△ ● Safety Approval:

△ ● Critical dimension:

H7 xx 00 x 3 xxxx G

△ No. OF POLES
02: 2 POLES
04: 4 POLES
06: 6 POLES
:
24: 24 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

RoHs compliant
(lead<4%)
In copper Alloy △

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		H7 5.0 Series Double row the 1st pole with side contact (H7XP) △			
PART NO.	H7xx00x3xxxxG			DWG NO.	8H70004
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Da cheng 2013.12.17	Da cheng 2013.12.17		Tolerance
					X. ± 0.50
					X.X ± 0.30
					X.XX ± 0.10
					X* $\pm 1^*$
SHEET: 01/01		REV.: D			