
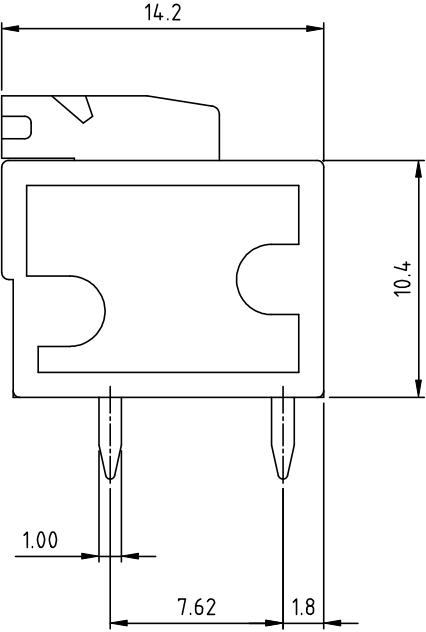


SIGN	DATE	DESCRIPTION	APPROVER
	01/20'07	The Soldering temperature from 245° to 250°	Aaron
	2010.08.12	The design is changed	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY Y!!!			

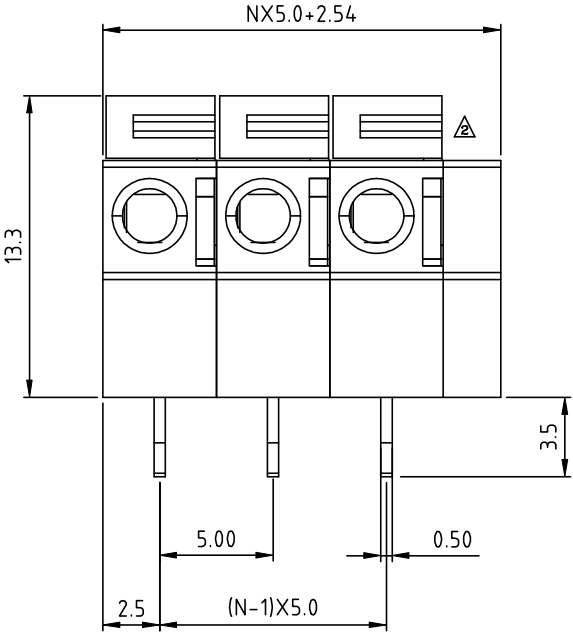


Material


- Terminal body (Contact pin): Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm²
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Pull force:
- Screw:
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:



N=Number of contacts

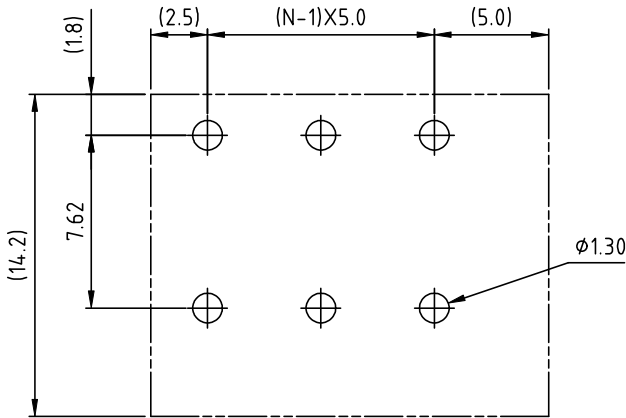

P.C.B. LAYOUT

HA xx 31 x 0 xxxx G

02	2 CONTACTS	2	Red	G: Pb<40,000ppm
03	3 CONTACTS	3	Orange	0000: "@" Logo (Standard)
...	...	5	Green(RAL6018/T)	000A: "ANYTEK" Mark
24	24 CONTACTS	8	Grey(RAL7004/P)	Any special item by customer request. please contact sales department.

ANYTEK				CUSTOMER COPY			
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE		HA-5.0mm 180°					
PART NO.		HAxx31x0xxxxG		DWG NO.		8HA0008	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
				Chen Bo 2010.08.12			X. ±0.50
					UNIT: mm		X.X ±0.30
					SCALE: NONE		X.XX ±0.10
					SHEET: 01/01		X° ±1°
					REV.: F		