


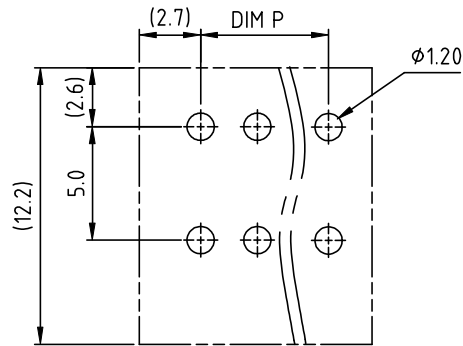




P.C.B LAYOUT

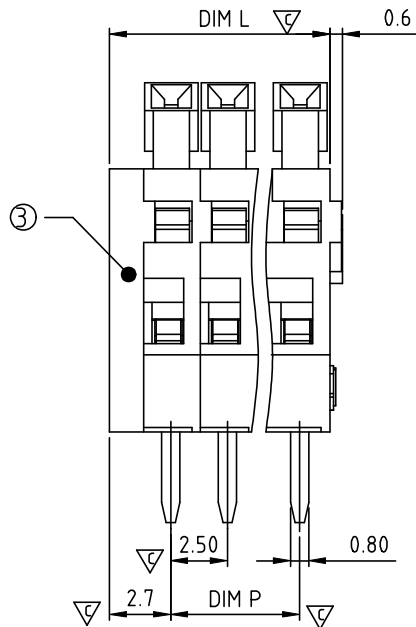

N=Number of poles

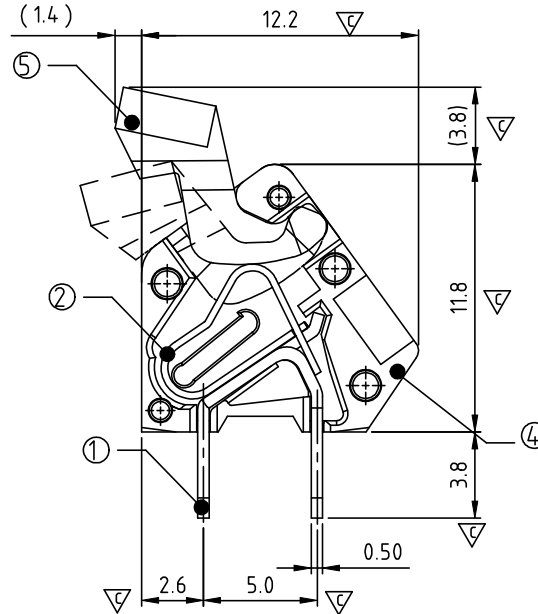

Dimension

DIM L	N×2.5+1.5
DIM P	(N-1)×2.5

N=Number of poles

POLES	DIM L	DIM P
2p-8p	±0.15	±0.15
9p-12p	±0.25	±0.20
13p-18p	±0.30	±0.25
19p-24p	±0.40	±0.35

SIGN	DATE	DESCRIPTION	APPROVER
△	01/27/07	The soldering temperature from 245° to 250°	Aaron
△	12/13/10	The operating temperature from -30°C to +105°C to -40°C to +115°C	Runner
△	12/13/10	The color is changed	Runner
△	05/05/12	Lever material is changed	Runner
△	10/29/14	update the drawing	Airy min
△	10/29/14	The soldering temperature from 250°C±10°C/5 Sec to 260°C±5°C/5 Sec	Airy min
△	07/06/16	顏色編碼有誤	CHENMING

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Solder Pin(Contact pin) : Brass ,Tin plated
- Item ② Spring clamp : Stainless steel
- Item ③ Terminal cover: Thermoplastic (UL94V-0)
- Item ④ Terminal housing: Thermoplastic (UL94V-0)
- △ ● Item ⑤ Lever: Thermoplastic (UL94 HB)

Electrical cULus

- Voltage rating:150V
- Current rating:4A
- Wire range:
 - Solid wire(AWG):22-28
 - Stranded wire(AWG):22-28
 - Wire strip length:6-7mm
 - Withstanding Voltage:1.3KV
- △ ● Operating temperature:-40°C to +115°C
- △△ ● Soldering temperature:260°C±5°C/5 Sec
- Safety approval : 
- Critical dimension: 

HE xx 4 0 x 0 xxxx G

Poles

- 02 2 POLES
- 03 3 POLES
- △ 24 24 POLES

Body Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P) △
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7004/P)
- 9 White(RAL1102)
- C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HE 2.5 series with levers						
PART NO.		HExx40x0xxxxG		DWG NO.	8HE0001			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		CHENMING 2016.07.06	CHENMING 2016.07.06			UNIT: mm	X. ±0.50	
						SCALE: NONE	X.X ±0.30	
				SHEET: 01/01		REV.: H	X.XX ±0.10	
							X° ±1°	