
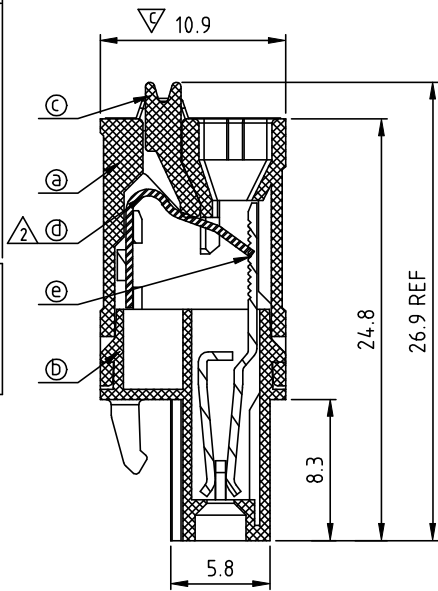
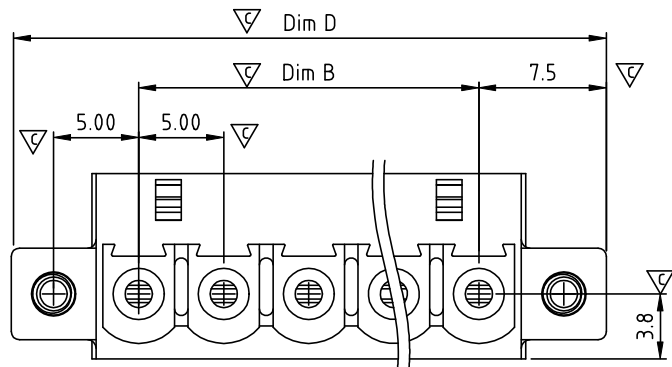
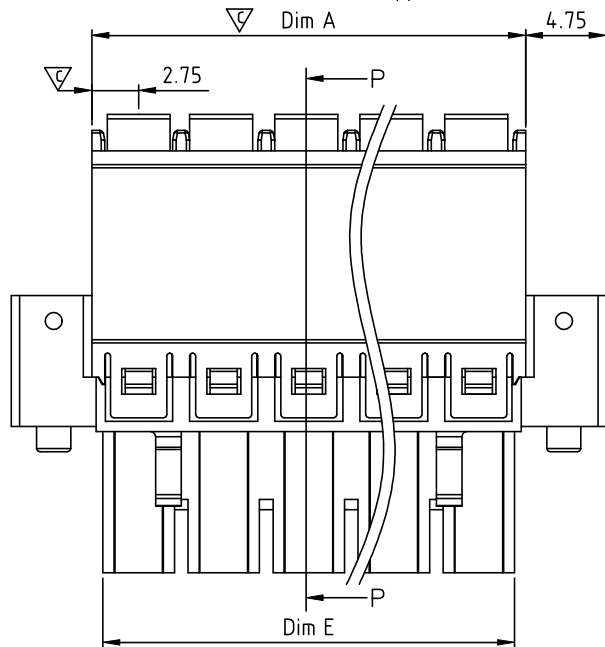
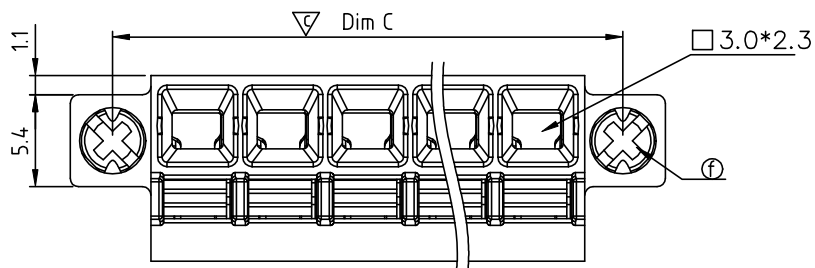
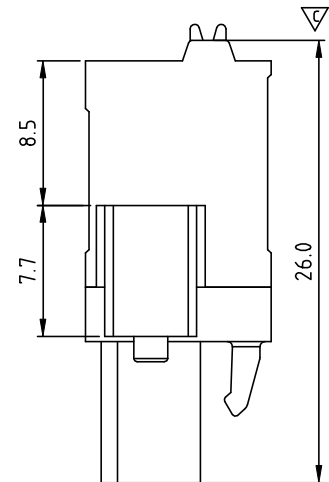




SECTION P-P

Dimension

DIM A	N×5.0+0.50
DIM B	(N-1)×5.0
DIM C	(N-1)×5.0+10.00
DIM D	(N-1)×5.0+15.0
DIM E	(N-1)×5.0+4.20

N=Number of poles

Tolerance			
2p-6p	7p-12p	13p-18p	19p-24p
±0.15	±0.25	±0.35	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	06/21'11	Add "cULus" Safety Approval logo	Aaron
△	09/20'12	The design is changed	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item a Terminal(Up housing): Thermoplastic (UL94 V-0)
- Item b Terminal(Down housing): Thermoplastic (UL94 V-0)
- Item c Terminal(Lever): Thermoplastic (UL94 V-0)
- Item d Spring clamp: Stainless steel
- Item e Female contact: PhBz Tin Plated.
- Item f With flange screw:Steel Zinc plating M2.5"+/-" slot type

Electrical:

- Voltage rating: 300 V
- Current rating: 12 A
- Wire range:
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Wire strip length: 11-12 mm
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus
- Critical dimension: ∇

KD xx 7 0 x 1 xxxx G

- No. OF POLES
- 02: 2 POLES
 - 03: 3 POLES
 - :
 - 24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

- G RoHS compliant (lead<4%)
- In copper Alloy
- 0000: "@" Logo (Standard)
- 000A: "ANYTEK" Mark
- Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		KD 5.0mm with flange Series (2P-24P)			
PART NO.	KDxx70x1xxxxG			DWG NO.	8KD0103
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 09/20'12	Chen Bo 09/20'12		Tolerance
					X. ±0.50
					X.X ±0.30
				UNIT: mm	X.XX ±0.10
				SCALE: NONE	X° ±1°
				SHEET: 01/01	REV.: D