
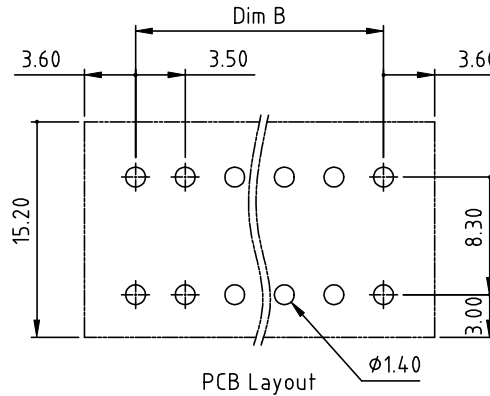


RoHS Compliant

SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

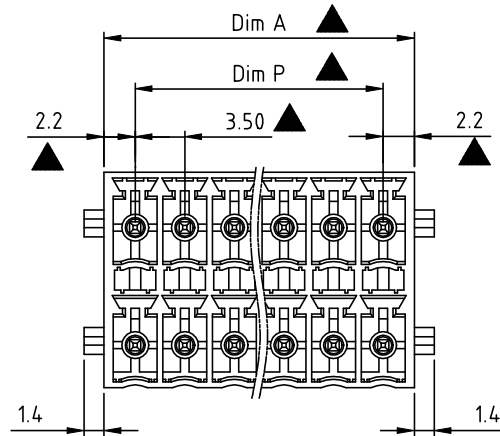



Material:

- Item ① Terminal(housing): High temp. polyamide (UL94 V-0)
- Item ② Contact pin : copper.tin plated

Electrical:

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +110°C
- Reflow Soldering temperature: 260°C/10 Sec. Max.
- APPROVAL: 
- Critical dimension: 

cULus

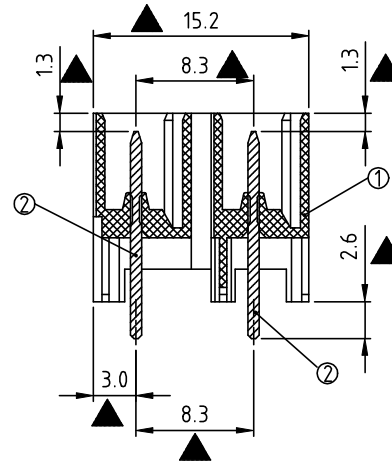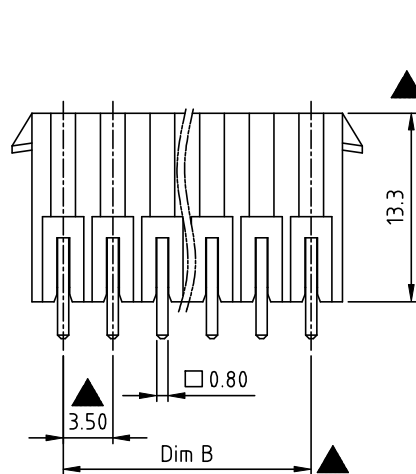

KE xx 1 C x 0 xxxx G

No. OF POLES
04: 2x2 POLES
06: 2x3 POLES
:
32: 2x16 POLES
COLOR
0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

N=NUMBER OF POLES

DIM		TOL		
		2x2P--2x6P	2x7P--2x12P	2x13P--2x16P
Dim A	(N/2-1)×3.5+4.4			
Dim B	(N/2-1)×3.5	±0.15	±0.20	±0.25
Dim P	(N/2-1)×3.5			

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 3.5mm With Holder Series (Vertical) THR type						
PART NO.	KExx1Cx0xxxxG			DWG NO.	8KE0430		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Guoxue 2019.11.07	Guoxue 2019.11.07		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X°	±1°
SHEET: 01/01				REV.: B			