
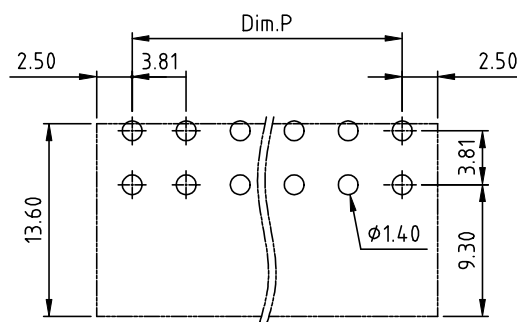
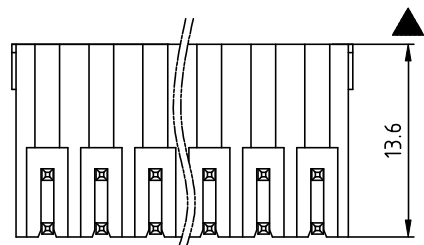
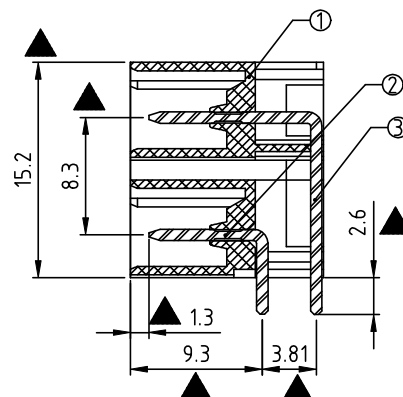


RoHS Compliant

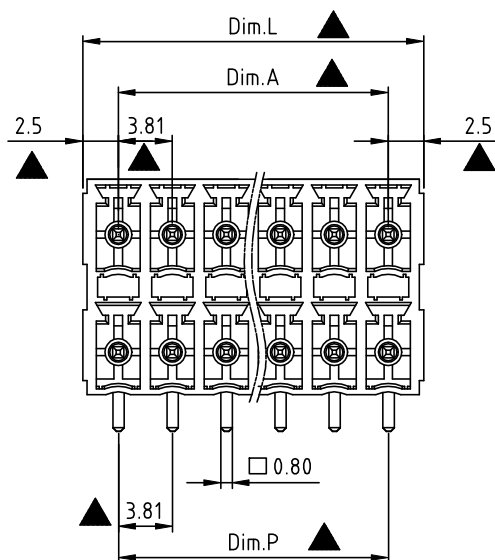

PCB Layout

N = Number of poles

Dim.L	$(N/2-1) \times 3.81+5$
Dim.P	$(N/2-1) \times 3.81$
Dim.A	$(N/2-1) \times 3.81$

Dim.P	2x2P-2x5P	2x6P-2x16P
Dim.L	± 0.20	± 0.30
Dim.P	± 0.15	± 0.25
Dim.A	± 0.15	± 0.25

SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item ① Terminal housing: High temp. polyamide (UL94V-0)
- Item ② Contact pin of short: Copper Tin plated
- Item ③ Contact pin of long: Copper Tin plated

Electrical:

cULus

- Voltage rating: 300V
- Current rating: 5.5A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to $+110^{\circ}\text{C}$
- Reflow Soldering temperature: $260^{\circ}\text{C}/10$ Sec. Max.
- APPROVAL:
- Critical dimension:

KE xx 3 A x 1 xxxx G

No. OF POLES

04: 2x2 POLES

06: 2x3 POLES

...

32: 2x16 POLES

COLOR

0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 3.81mm W/o Flange Series (Right angle) THR type								
PART NO.	KExx3Ax1xxxxG			DWG NO.	8KE0508				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Guoxue 2019.11.07	Guoxue 2019.11.07					UNIT: mm	X. ±0.50
					SCALE: NONE		X.X ±0.30		
				SHEET: 01/01	REV: B		X.XX ±0.10		
							X° ±1°		