



SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

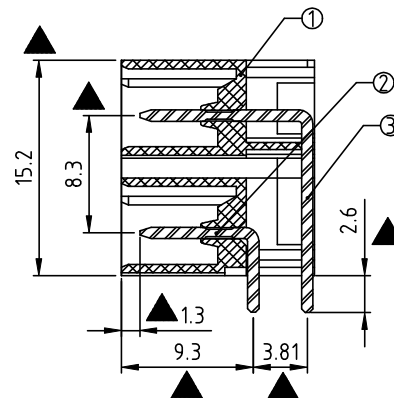

- Voltage rating: 300V
- Current rating: 5.5A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +110°C
- Reflow Soldering temperature: 260°C/10 Sec. Max.
- APPROVAL: 
- Critical dimension: 

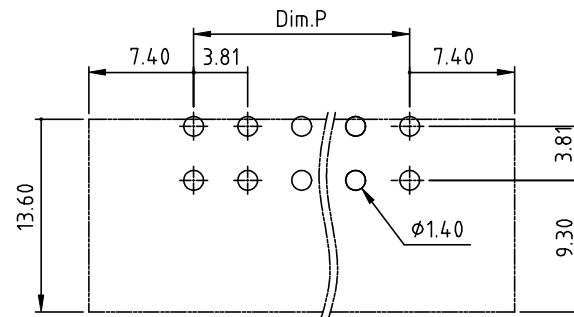

0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Dim.P	$2 \times 2P - 2 \times 5P$	$2 \times 6P - 2 \times 16P$
Dim.L	± 0.20	± 0.30
Dim.P	± 0.15	± 0.25
Dim.A	± 0.15	± 0.25



Amphenol **ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 3.81mm With Flange Series (Right angle) THR type						
PART NO.	KExx3Bx1xxxxG			DWG NO.	8KE0510		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2019.11.07	Guoxue 2019.11.07		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV: B		X.XX ±0.10
				SHEET: 01/01			X° ±1°