
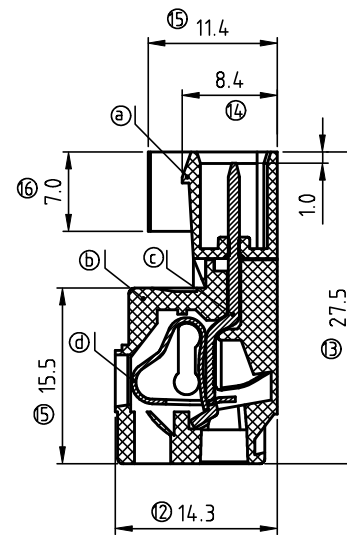
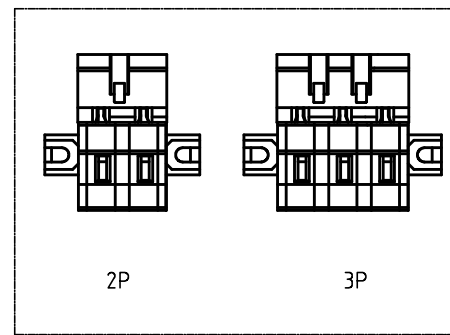


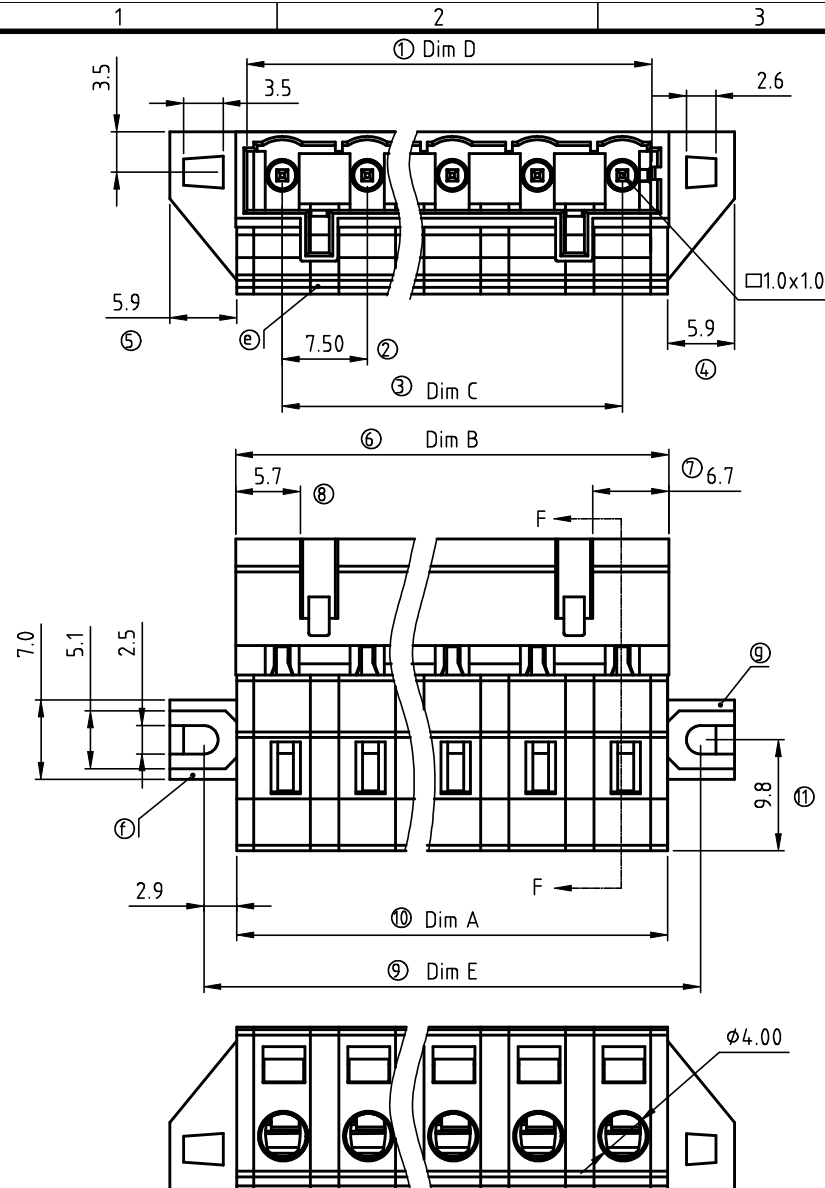

SECTION F-F

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item a :Terminal housing: Thermoplastic (UL94 V-0)
- Item b :Terminal housing: Thermoplastic (UL94 V-0)
- Item c :Male contact pin: Brass Tin plated
- Item d :Spring clamp: Stainless steel
- Item e :Pad board: Thermoplastic (UL94V-0)
- Item f:Terminal left cover: Thermoplastic (UL94V-0)
- Item g:Terminal right cover: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40℃ to +115℃
- Safety Approval:

NB xx A 0 x 3 xxxx G

00	0 poles
02	2 poles
03	3 poles
...	...
16	16 poles

Color
0: BLACK (RAL 9005)
5: GREEN (RAL 6018/T)
6: BLUE (RAL 5015/A)
8: GREY (RAL 7035/D)

any special item by customer request, please contact sales department.

N = Number of poles

$$\text{Dim } A = N \times 7.5 + 0.5$$
$$\text{Dim B} = N \times 7.5 + 0.7$$
$$\text{Dim } C = (N-1) \times 7.5$$
$$\text{Dim } D = (N-1) \times 7.5 + 5.7$$
$$\text{Dim } E = N \times 7.5 + 6.3$$

	Dim A	Dim B	Dim C	Dim D	Dim E
2-6p	± 0.20	± 0.20	± 0.10	± 0.20	± 0.10
7-12p	± 0.30	± 0.30	± 0.20	± 0.30	± 0.20
13-16p	± 0.40	± 0.40	± 0.30	± 0.40	± 0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NB 7.5mm series With flange 100% protected against mismatching						
PART NO.	NBxxA0x3xxxxxG			DWG NO.	8NB0304		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
			Chen Bo 2011.03.28		UNIT: mm	X.	±0.50
					SCALE: 2/1	X.X	±0.30
				SHEET: 01/01	REV.: B	X.XX	±0.10
						X°	±1°