
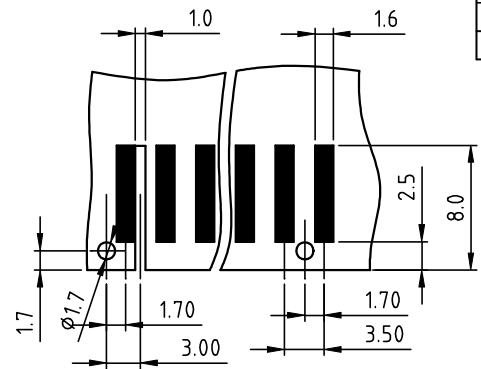
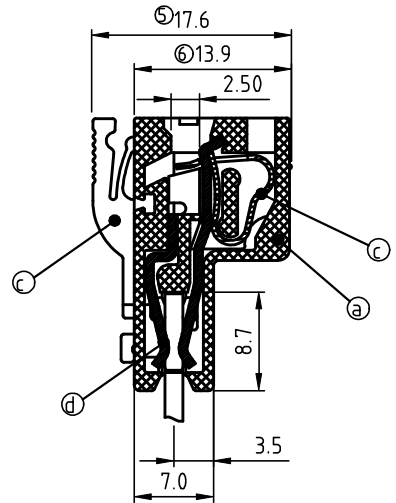


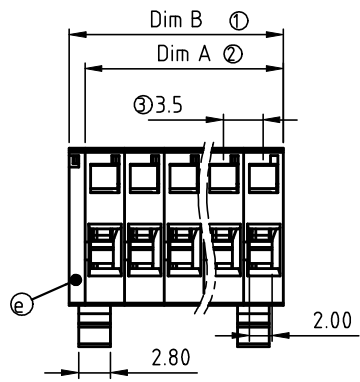




SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item (a) Insulator (Body): Thermoplastic (UL94V-0)
- Item (b) Insulator (Lever): Thermoplastic (UL94V-0)
- Item (c) Spring clamp : Stainless Steel
- Item (d) Female Contact : PbZ(CuSn), Tin plated
- Item (e) Insulator (Cover): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Solid wire(AWG): 16~26
- Stranded wire(AWG): 16~26
- Wire strip length: 7~8mm
- Withstanding Voltage: 1.6KV
- Size of the PCB: 1.6±0.2mm
- Operating temperature: -40°C to +115°C

ND xx 10 x 0 xxxx G

02	2 CONTACTS	0	Black	0000:"@Logo (Standard)	Pb < 40,000ppm
03	3 CONTACTS	5	Green	000A:"ANYTEK"Logo	(RoHS)
...	...	6	Blue	Any special item by	
24	24 CONTACTS	8	Grey	customer request,	
				please contact sales	
				department.	

Poles	2	3	4	5	6	7	8	9	10	11	12	13
Dim A	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.5	45.5
Dim B	8.4	11.9	15.4	18.9	22.4	25.9	29.4	32.9	36.4	39.9	43.4	46.9
TOL	±0.15					±0.20						
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	49.0	52.5	56.0	59.5	63.0	66.5	70.0	73.5	77.0	80.5	84.0	
Dim B	50.4	53.9	57.4	60.9	64.4	67.9	71.4	74.9	78.4	81.9	85.4	
TOL	±0.30					0.35						

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		ND3.5 Series							
PART NO.	NDxx10x0xxxxG				DWG NO.	8ND0001			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance		
		Jacke 2009.07.16	Jacke 2009.07.16				UNIT: mm SCALE: NONE REV.: B	X. X.X X.XX X°	±0.5 ±0.3 ±0.1 ±1°
					SHEET: 01/01				