







RoHS Compliance



Rev.	SIGN	DATE	DESCRIPTION	APPROVER
C	△	12/03'13	Update the drawing	Jacky
D	△	11/18'14	change the product description ,change the structure	Chenhao
E	△	1/12'16	Add the safety certification icon and update drawing	Chenhao
F	△	12/23'21	Add the safety certification icon and update drawing	Johnson

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Terminal body: PA66 (UL94V-0)
- Item ② Terminal : PhBz,Tin plated.
- Item ③ Terminal cover : PA66 (UL94V-0)


△ Electrical cULus TUV(EN/IEC60998-2-2)

- Voltage rating: 150V 130V
- Current rating: 7A 9A
- Wire range:
 - Solid wire(AWG): 18-22 0.34-0.75mm²
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.3KV 1.25KV
- Operating temperature: -40°C to +115°C

- △ △ ● Safety approval : cULus △
 - Staying power between the under bodysand the above body:8kgf.cm
 - Staying power between the body and the cover:2.5kgf.cm
 - Staying power between the under bodysand the above body:8kgf.cm
 - △ ● Staying power between the body and the cover:2.5kgf.cm
- Critical dimension: ▲

PART No.:

NS 01 00 x 1 xxxx G

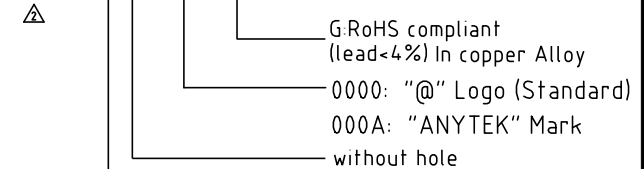

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NS 5.75 series 1P (solid block without hole) △				
PART NO.		NS0100x1xxxxG △		DWG NO.		8NS0005
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	
			Johnson 2021.12.23	Johnson 2021.12.23		
						Tolerance
						X. ±0.50
				UNIT: mm		X.X ±0.30
				SCALE: NONE		X.XX ±0.10
				SHEET: 01/01		X° ±1°
				REV.: F		