

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		06/24-19	Initial release	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ③ Male contact pin: Copper, Bright Tin plated over Nickel plated
- Item ⑤ Terminal(housing): Thermoplastic (UL94V-0)

- Electrical: cULus /VDE /TUV
- Voltage rating: 300V/300V/300V
 - Current rating: 20A/20A/20A
 - Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - Wave soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval:   
 - Critical dimension: ▲

OQ xx 5 7 x 0 xxxx G

No. OF POLES

02: 2 POLES

:

:

24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)

In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

N = Number of poles




Dim A=Nx5.08+2

Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

Amphenol
ANYTEK**CUSTOMER COPY**ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 5.08mm Vertical /Close Series 2p-24p(with latch holder)				
PART NO.		OQxx57x0xxxxG		DWG NO.	80Q07477	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Chen Bo 06/24-19	Chen Bo 04/15-19		UNIT: mm	X. ±0.50
				SHEET: 01/01	SCALE: NONE	X.X ±0.30
					REV.: B	X.XX ±0.10
						X° ±1°

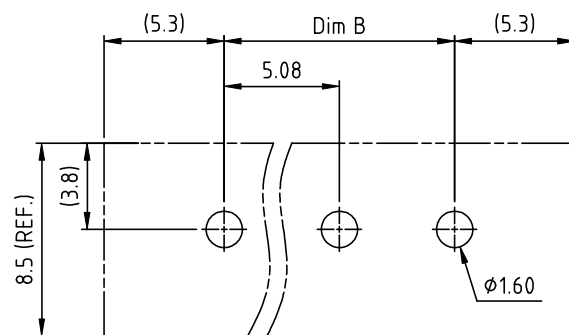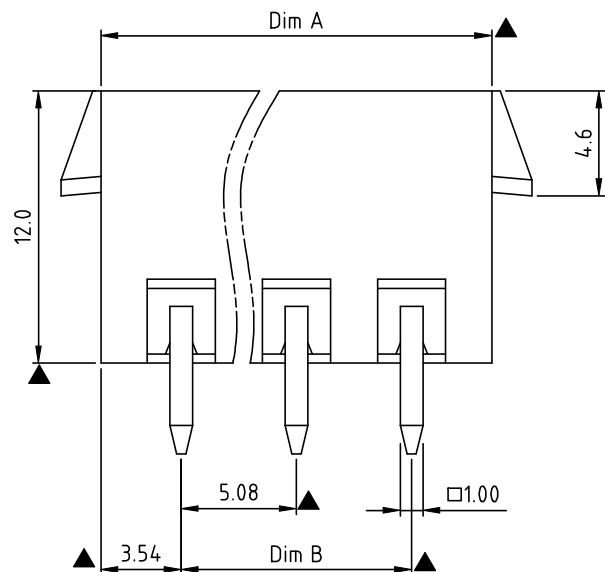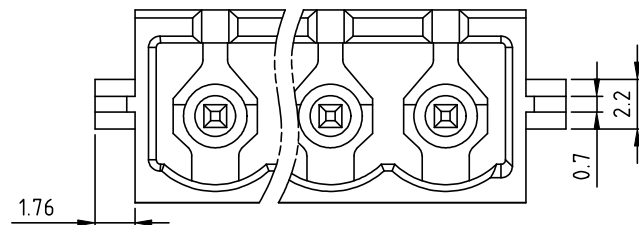

RECOMMENDED PCB LAYOUT