


RoHS Compliant






Dimension A&B

DIM A	N×5.08
DIM B	(N-1)×5.08

N=Number of Poles



Poles	Dim.A Tol.
2P-8P	±0.15
9P-14P	±0.25
15P-20P	±0.35
21P-24P	±0.40

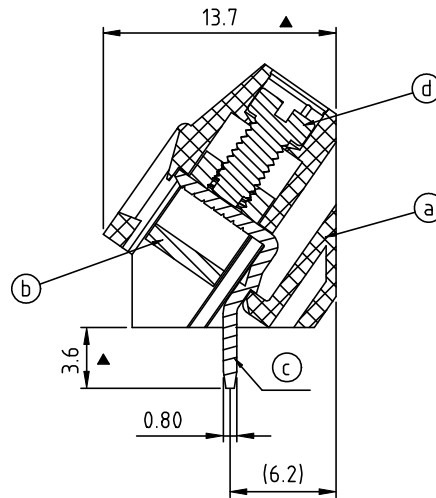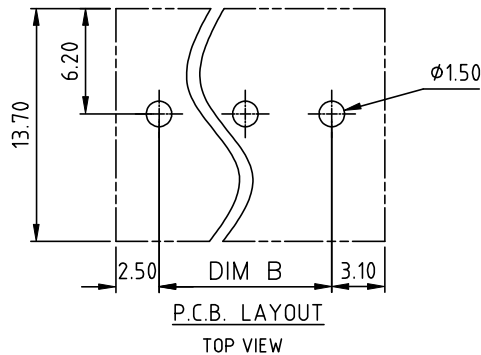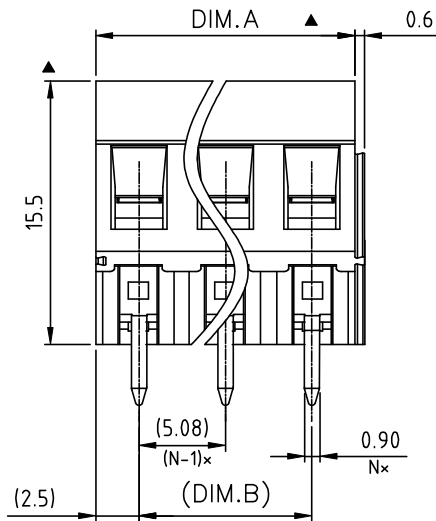

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
A	△	2/10`06	Part NO is Changed	xionghaitao
B	△	01/12`07	Soldering temperature changed from 245° to 250°	Tason
C	△	09/08`20	Add the "Wave Soldering temperature: 260°C±5°C/5 Sec"	Guoxue
	△	09/08`20	Addthe "RoHS compliant"&"Color code"	Guoxue
	△	09/08`20	Addthe "RoHS compliant"&"Amphenol Logo"&"Reference dimension"	Guoxue
	△	09/08`20	Addthe "Dim.A Tol."	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material: ● Item② Terminal housing :Thermoplastic (UL 94V-0)
● Item④ Clamp : Brass , Ni plated
● Item③ Wire guard solder pin : Brass , Tin plated
● Item① Terminal screw: Steel Zinc plating"-slot type

Electrical UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Wave Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval Defa:

● Critical dimension: ▲

▲ ● Reference dimension: (×)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

T2 xx 2 1 x 1 xxxx G			
02 2 POLES	Color ▲	0000:"@Logo (Standard)	RoHS compliant (lead<4%) In copper Alloy
03 3 POLES	0 Black (RAL9005)	000A:"ANYTEK"Logo	
...	2 Red (RAL3001/D)	Any special item by customer request,	
24 24 POLES	3 Orange(RAL2011/P)	please contact sales department.	
	4 Yellow(RAL1018/A)		
	5 Green(RAL6018/T)		
	6 Blue (RAL5015/A)		
	8 Grey(RAL7035/D)		
	9 White(RAL1102)		
	C Green(RAL6018/U)		

Amphenol ANYTEK		CUSTOMER COPY	
TITLE T2 5.08 SERIES (2P-24P) Solid block		ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD	
PART NO.	T2xx21x1xxxxG ▲	DWG NO.	8T20201
APPROVED	CHECKED	DESIGNED	DRAWN
		Guoxue 2020.09.08	Guoxue 2020.09.08
SHEET: 01/01		Tolerance	
		UNIT: mm	
		SCALE: NONE	
		X. ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X° ±1°	