

| SIGN | DATE | DESCRIPTION | APPROVER |
|--|----------|----------------------------------|----------|
| △ | 02/27'07 | Part No. is changed. | Aaron |
| △ | 10/13'11 | Operating temperature is changed | ChenMing |
| △ | 10/13'11 | Remove the "VDE" mark | ChenMing |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! | | | |

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated

Electrica





- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval:
- Critical dimension: ▽

△ TN 03 2 x 1 0 xxxx G


0 Black
9 White

RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

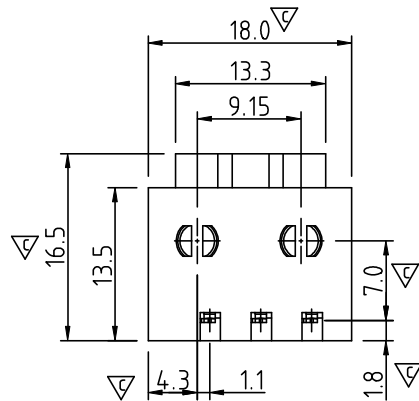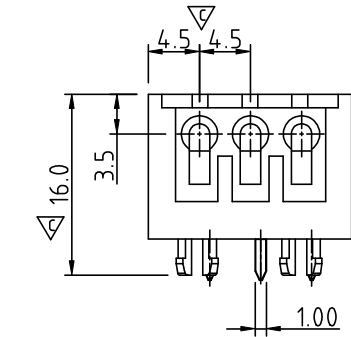

P.C.B LAYOUT

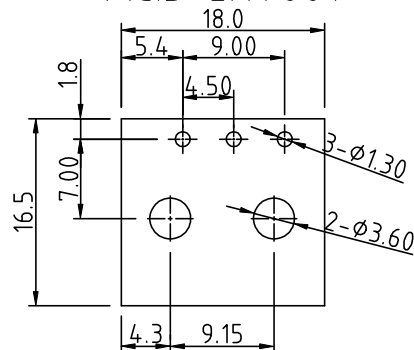

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

| | | | | | | | |
|----------|---------------------------------------|----------|------------------------|--------------|-------------|------|-------|
| TITLE | TN-4.5mm 180D Series 3P Without cover | | | | | | |
| PART NO. | TN032x10xxxxG | | | DWG NO. | 8TN0201 | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | | | |
| | | | ChenMing 2011.10.13 | | UNIT: mm | X. | ±0.50 |
| | | | | | SCALE: NONE | X.X | ±0.30 |
| | | | | | | X.XX | ±0.10 |
| | | | | SHEET: 01/01 | REV.: D | X° | ±1° |

| SIGN | DATE | DESCRIPTION | APPROVER |
|------|----------|--|----------|
| △ | 02/27'07 | Part No. is changed. | Aaron |
| △ | 10/13'11 | Operating temperature is changed | ChenMing |
| △ | 10/13'11 | Remove the "VDE" mark | ChenMing |
| △ | 10/13'11 | The dimension is changed from 22.90 to 22.9 | ChenMing |
| △ | | THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! | |

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated

Electrica

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval:
- Critical dimension: ▽

△ TN 06 2 x 1 0 xxxx G

0 Black
9 White


RoHS compliant
(lead<4%)
In copper Alloy





0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

| | | | | | | | |
|----------|--------------|---------------------------------------|------------------------|---|--------------|--------|-----------|
| TITLE | | TN-4.5mm 180D Series 6P Without cover | | | | | |
| PART NO. | TN062X10XXXG | | | DWG NO. | 8TN0202 | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | | | Tolerance |
| | | | ChenMing 2011.10.13 |  | UNIT: mm | X. | ±0.50 |
| | | | | | SCALE: NONE | X.X | ±0.30 |
| | | | | | SHEET: 01/01 | REV: D | X.XX |
| | | | | | | X° | ±1° |

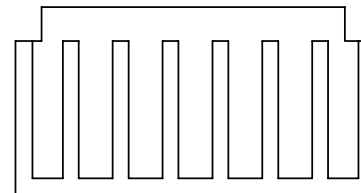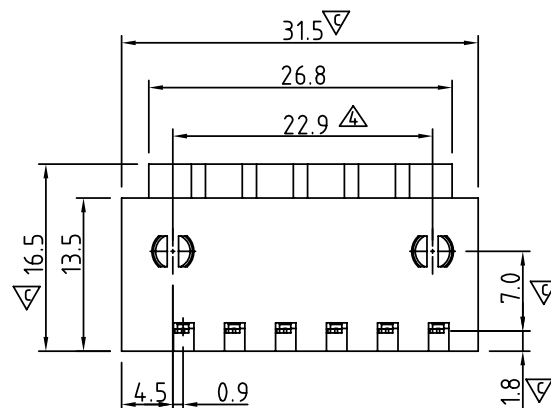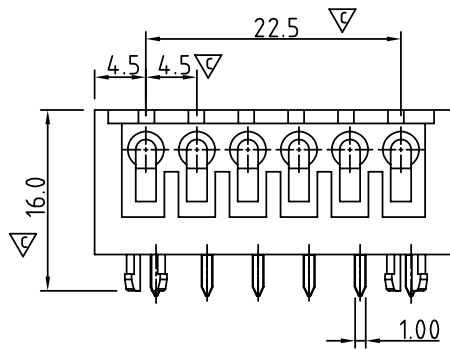

P.C.B LAYOUT

