

RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	10/17'19	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				


Cover:

POLES	2P	3P
DIM		
Dim H	7.40	10.90

Note: 3P Cover for odd poles
2p Cover for even poles

Material:

- Item ① Terminal housing: LCP (UL94V-0)
 - Item ② Male contact pin: Brass, Tin plated
 - Item ③ With cover: High temp. polyamide (UL94V-0)
- Electrical: cULus
- Voltage rating: 150V
 - Current rating: 7A
 - Withstanding Voltage: 1.3KV
 - Operating temperature: -40°C to +130°C
 - Reflow Soldering temperature: 260°C/10 Sec Max.
 - Safety Approval: cULus
 - Critical dimension: ▲

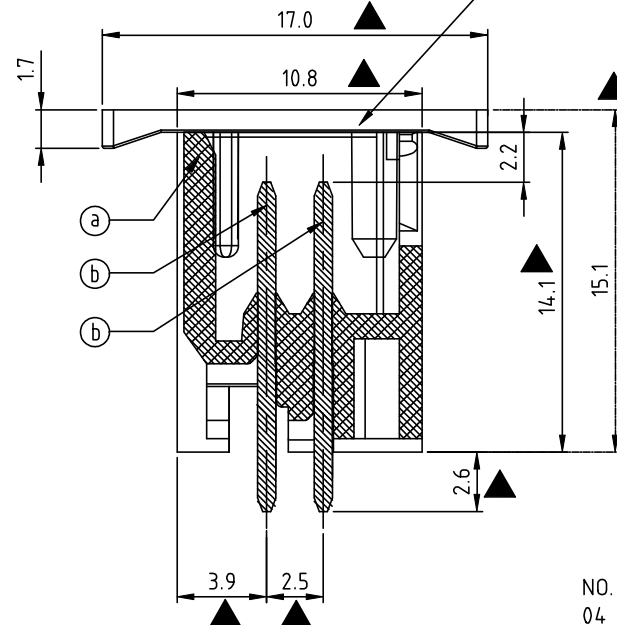

SECTION A-A

V X xx 1 1 x A Bxxx G

NO. of Poles
04 2x2 Poles
06 3x2 Poles
...
32 16x2 Poles

COLOR
0 Black (RAL9005)

RoHS compliant
(lead<4%)
In copper Alloy

B000 Standard @ Logo
B00A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

$$\begin{aligned} \text{DimL} &= (N/2 - 1) \times 3.5 + 4.9 \\ \text{DimP} &= (N/2 - 1) \times 3.5 \\ \text{DimK} &= (N/2 - 1) \times 3.5 \end{aligned}$$

N=Number of poles

POLES	Dim. Tol	Dim.L	Dim.P & Dim.K
2x2p-2x6p		±0.15	±0.10
2x7p-2x12p		±0.25	±0.20
2x13p-2x16p		±0.35	±0.30

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VX 3.5mm Series Close Vertical THR (With cover & Tape reel)			
PART NO.	VXxx11xABxxxG			DWG NO.	8VX0115
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2019.10.17	Guoxue 2019.10.17		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
SHEET: 01/01		UNIT: mm		SCALE: NONE	
		REV.: B			

