



RoHS Compliant

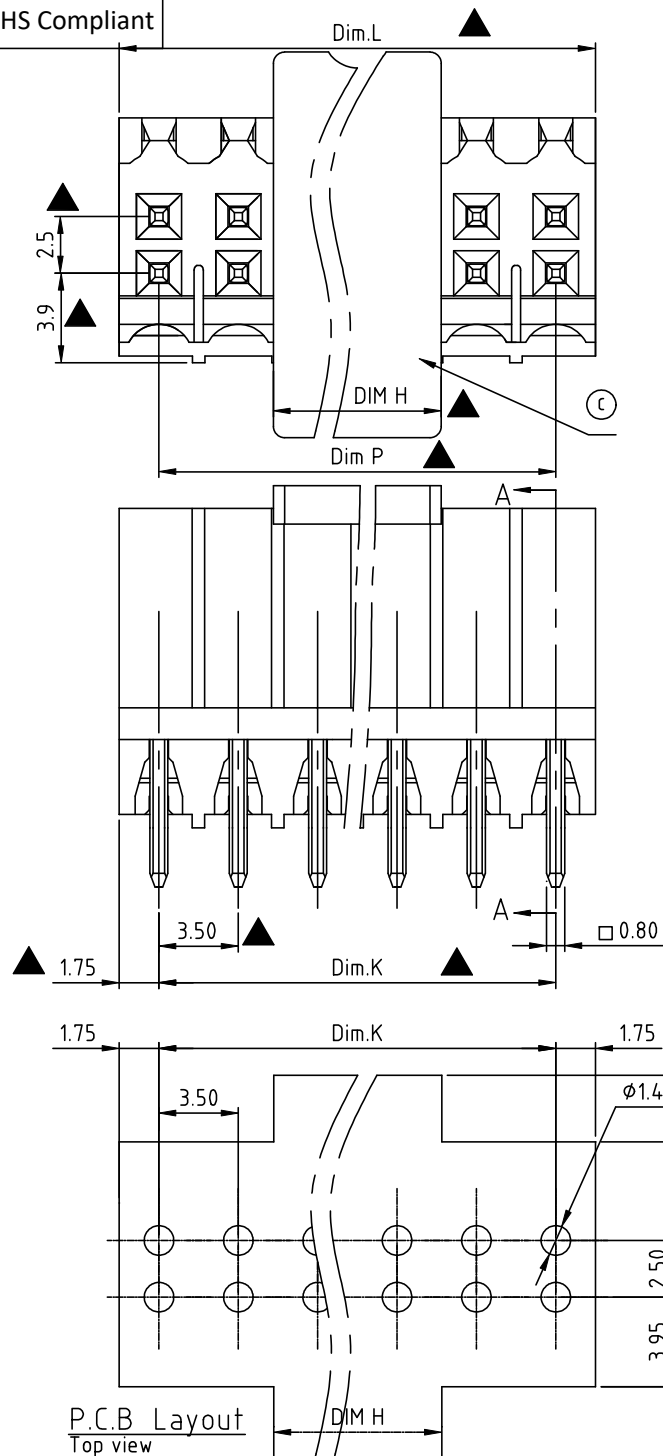

Cover:

POLES	2P	3P
Dim H	7.40	10.90

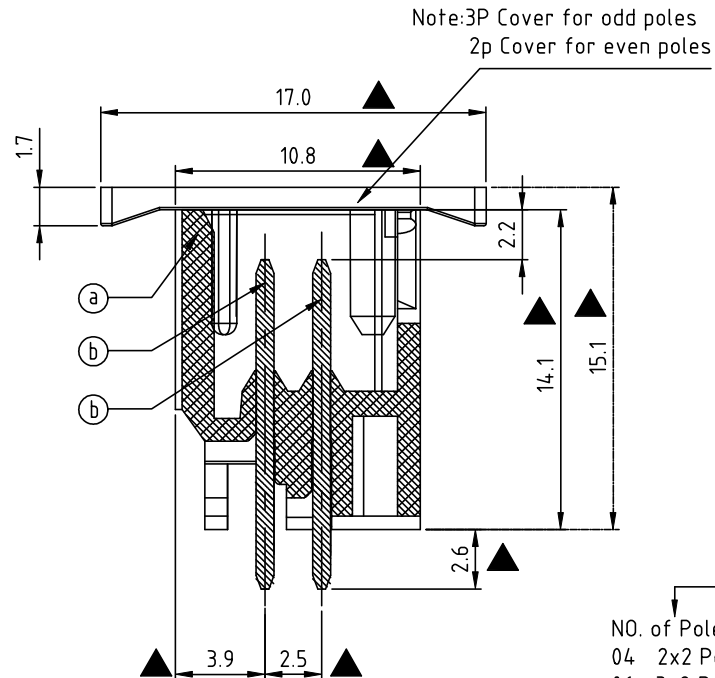

SECTION A-A

DimL=	$N/2 \times 3.5$
DimP=	$(N/2 - 1) \times 3.5$
DimK=	$(N/2 - 1) \times 3.5$

N=Number of poles

POLES	Tol	Dim.	Dim.L	Dim.P & Dim.K
2x2p-2x6p			±0.15	±0.10
2x7p-2x12p			±0.25	±0.20
2x13p-2x16p			±0.35	±0.30

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	10/17'19	The first release	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal housing: LCP (UL94V-0)
 - Item ② Male contact pin: Brass, Tin plated
 - Item ③ With cover: High temp. polyamide (UL94V-0)
- Electrical: cULus
- Voltage rating: 150V
 - Current rating: 7A
 - Withstanding Voltage: 1.3KV
 - Operating temperature: -40°C to +130°C
 - Reflow Soldering temperature: 260°C/10 Sec Max.
 - Safety Approval:
 - Critical dimension:

V X xx 1 0 x A Bxxx G

RoHS compliant (lead<4%)
In copper Alloy

B000 Standard @ Logo
B00A Standard ANY Logo
Any special item by customer request, please contact sales department.

NO. of Poles
04 2x2 Poles
06 3x2 Poles
...
32 16x2 Poles

COLOR
0 Black (RAL9005)

Amphenol

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VX 3.5mm Series Open Vertical THR (With cover & Tape reel)			
PART NO.	VXxx10xABxxxG			DWG NO. 8VX0117
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Guoxue 2019.10.17	Guoxue 2019.10.17	
				UNIT: mm
				SCALE: NONE
SHEET: 01/01				REV.: B
				Tolerance
				X. ±0.50
				X.X ±0.30
				X.XX ±0.10
				X° ±1°