
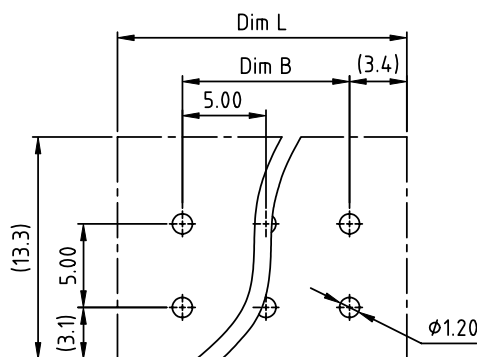
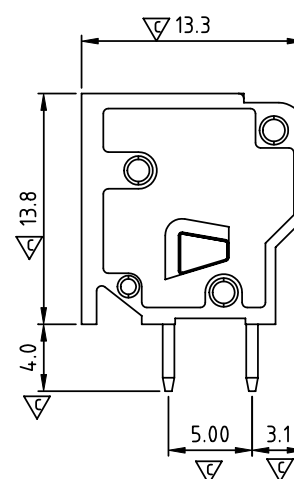


SECTION A-A Δ

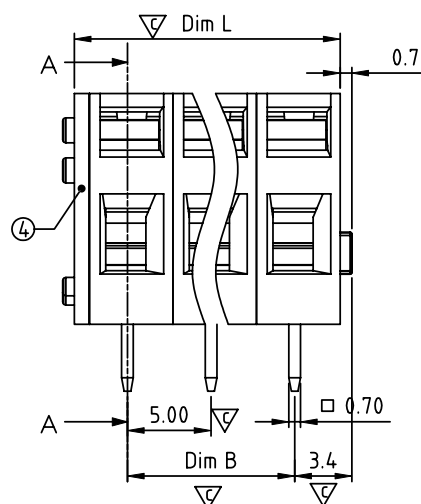

PCB LAYOUT
Δ Bottom view

Δ
N=NUMBER OF POLES

Dim L	$N \times 5.0 + 0.9$
Dim B	$(N-1) \times 5.0$

POLES	Dim L	Dim B
2p-6p	±0.2	±0.15
7p-12p	±0.3	±0.25
13p-18p	±0.4	±0.35
19p-24p	±0.45	±0.4

SIGN	DATE	DESCRIPTION	APPROVER
△	07/04'13	update the drawing	Da cheng
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Δ Material

- Item ① Terminal housing: Thermoplastic (UL94V-0)
- Item ② Solder Pin: Brass Tin plated.
- Item ③ Spring clamp : Stainless steel
- Item ④ Terminal Cover : Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 300 V
- Current rating: 15A
- Wire range:
- Solid wire(AWG): 14-28
- Stranded wire(AWG): 14-28
- Wire strip length: 6-7 mm
- Withstanding Voltage: 1.6KV

Δ ● Operating temperature: -40°C to +115°C

Δ ● Soldering temperature: 260°C±5°C/5 Sec

● Safety Approval: 

Δ ● Critical dimension: 

HHxx00x0xxxxG			Δ RoHs compliant (lead<4%) In copper Alloy
Δ No. OF POLES	Δ Color		
02 2 POLES	0 Black (RAL9005)		0000 Standard @ Logo
03 3 POLES	2 Red (RAL3001/D)		000A Standard ANY Logo
...	3 Orange(RAL2011/P)		Any special item by
24 24 POLES	4 Yellow(RAL1018/A)		customer request,
	5 Green(RAL6018/T)		please contact sales
	6 Blue (RAL5015/A)		department.
	8 Grey(RAL7004/P)		
	9 White(RAL1102)		
	C Multiple colors		

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	HH - 5.0mm Series			
PART NO.	HHxx00x0xxxxG			DWG NO. 8HH0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Da cheng 2013.07.04	Da cheng 2013.07.04	
				  UNIT: mm SCALE: NONE SHEET: 01/01 REV.: E
				Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°