



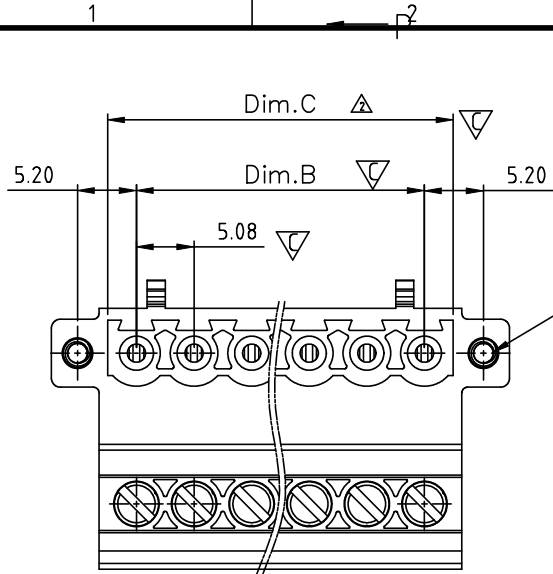

3P-24P卡勾位置示意图

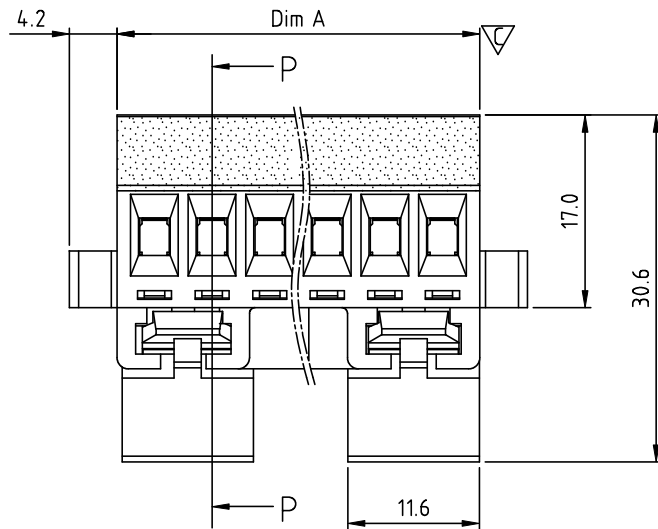



V9 xx 5 1 x 3 xxxx G

No. OF POLES
02: 2 POLES
03: 3 POLES
...
24: 24 POLES

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.

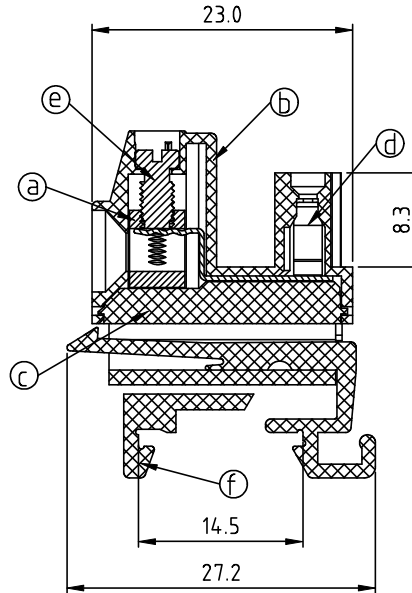

SECTION P-P

SIGN	DATE	DESCRIPTION	APPROVER
△	11/09'11	Add is cULus	Aaron
△	11/09'11	The Dim C is added	Aaron
△	01/21-16	Update the drawing & Add the 2P view	Evan

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

△ Material:

- Item ① Clamp: Brass Ni plated
- Item ⑤ Terminal (housing): Thermoplastic (UL94V-0)
- Item ③ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ④ Male contact: PhBz, Bright Tin plated over Nickel plated
- Item ② Terminal screw: Steel Zinc plating " - " slot type
- Item ⑦ Terminal(track): Thermoplastic (UL94V-0)
- Item ⑨ With flange nut: Brass M2.5

Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
 - Solid wire(AWG):12-30
 - Stranded wire(AWG):12-30
- Torque:5.2Lb-In.
- Screw:M3
- Wire strip length: 6-7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-40°C to +115°C
- △ ● Safety Approval: cULus
- Critical dimension: ▽

N=Number of poles

Dimension

Dim.A	$(N-1) \times 5.08 + 6.6$
Dim.B	$(N-1) \times 5.08$
Dim.C	$N \times 5.08$

Poles	Tolerance
2P - 6P	±0.15
7P - 12P	±0.20
13P - 18P	±0.30
19P - 24P	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		V9-5.08 mm Series 2P-24P With Flange (Dinrail holder A type)					
PART NO.	V9xx51x3xxxxG			DWG NO.	8V90003		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Evan 02/15-16	Tony 2008.01.19		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					SHEET: 01/01		REV: D
						X° ±1°	