
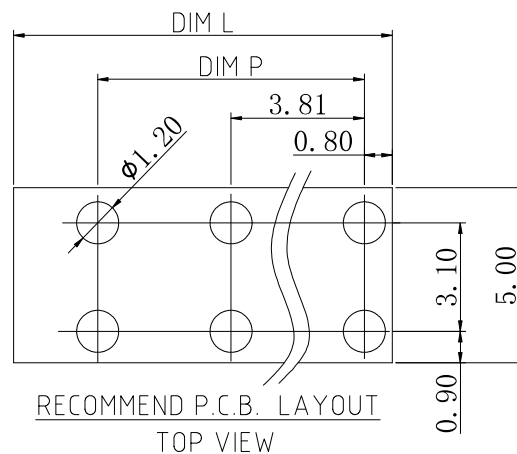
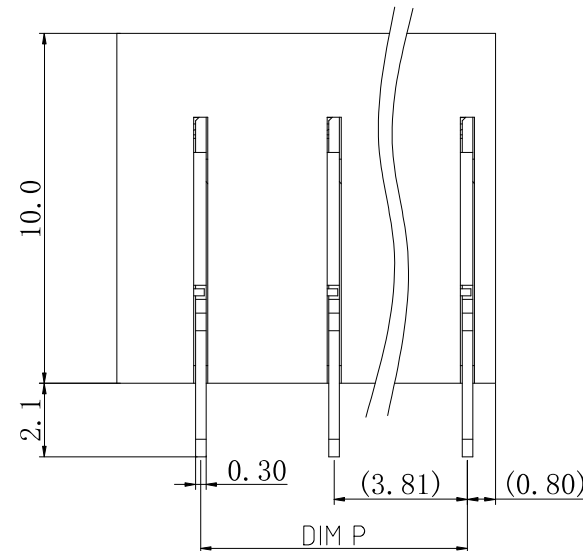
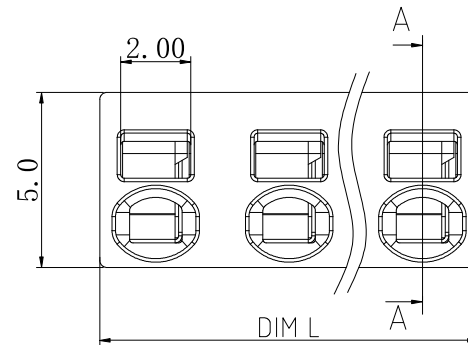


RoHS Compliant

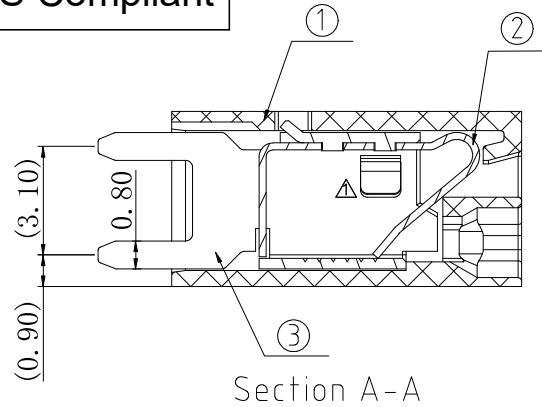

N=numbers of poles
 DIM P=(N-1)×3.81
 DIM L=(N-1)×3.81+3.2

Poles	Tolerance	
	DIM P	DIM L
2-6p	± 0.2	± 0.25
7-12p	± 0.25	± 0.3

Rev	SIGN	DATE	DESCRIPTION	APPROVER
A0	—	09/30`21	First issue	Vincent
A1		01/17`22	取消本体凸点, 降低脚子挡板高度, 线径范围由24~20AWG变更为24~18AWG, 剥线长度由5~6mm变更为6/7.5mm	Vincent
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Note :

- Rated Voltage: 300V
- Rated Current: 6A
- △ ● Solid wire(AWG): 24-18
- △ ● Stranded wire(AWG): 24-18
- △ ● Wire strip length (refer to UL1007 wire):
6±0.5mm for AWG24-20; 7.5±0.5mm for AWG18
- Withstanding Voltage: 2.0KV
- Operating temperature: -40°C to +115°C
- Wave Soldering temperature: 260°C±5°C/5 Sec
- Using screwdriver SL16(Ø1.6)
- Reference dimension: (×)

N9 XX 1 0 X 0 XXXX G

RoHS
Pb<40,000ppm

No. of poles	BODY COLOR	
02: 2 poles	0: Black	0000 Standard @ Logo
03: 3 poles	2: Red	000A Standard ANY Logo
	3: Orange	Any special item by
	4: Yellow	customer request,
	5: Green	please contact sales
12: 12 poles	6: Blue	department.
	8: Grey	
	9: White	

③	Terminal	PhBz Tin Plated.	N
②	Spring clamp	Stainless steel	N
①	Body	Thermoplastic (UL94V-0)	1
ITEM	PART NAME	DESCRIPTION	QTY

NOT FOR PRODUCTION

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE		N9 2P-12P terminal block					
PART NO.		N9XX10X0XXXXG		DWG NO.		8N90001	
APPROVED		CHECKED		DESIGNED		DRAWN	
		Vincent 2022.01.17		Vincent 2022.01.17			
						Tolerance X. ±0.50 X. X ±0.30 X. XX ±0.10 X° ±1°	
				SHEET: 01/01 REV.: A1		UNIT: mm SCALE: NONE	