
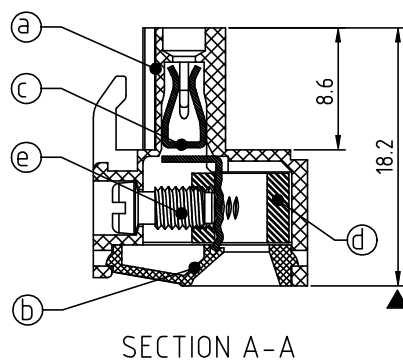
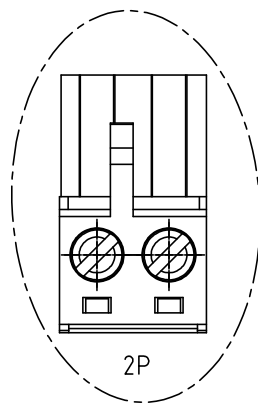
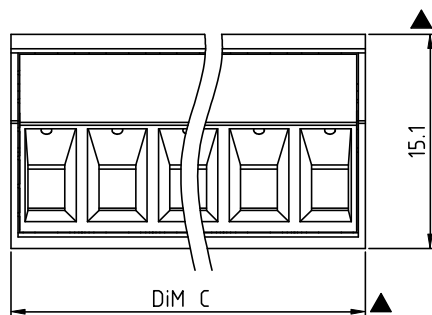
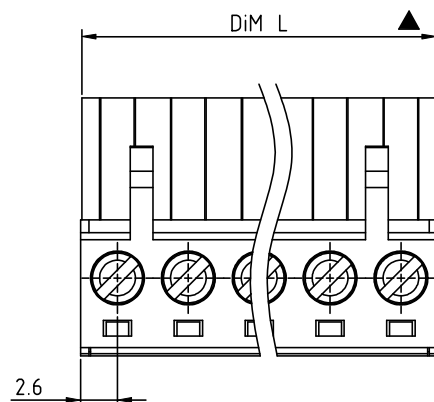


RoHS Compliant

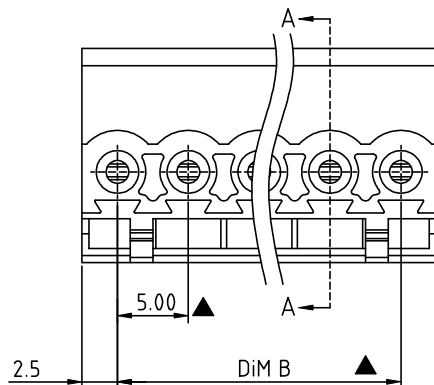

DIMENSION

Dim L	Nx5.0
Dim B	(N-1)x5.0
Dim C	Nx5.0+0.10

N= NUMBER OF CONCATS

Poles	Tolerance
2P-5P	±0.15
6P-10P	±0.20
11P-15P	±0.25
16P-20P	±0.30
21P-24P	±0.40

REV	DATE	ECN NO.	APPROVER
E	04/12-21	ECN202104004	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item① Terminal body:Thermoplastic (UL94V-0)
- Item② Terminal cover:Thermoplastic (UL94V-0)
- Item③ Female contact:PhBz,Bright Tin plated over Nickel plated
- Item④ Clamp:Brass:Ni plated
- Item⑤ Terminal screw:Steel Zinc plating “-” slot type

Electrical

- Voltage rating:300V
- Current rating:12A
- Solid wire(AWG):12-24
- Stranded wire(AWG):12-24
- Torque(Lb-In): 5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safeyt Approval: 
- Critical dimension: ▲

TJ xx 71x 6 xxxx G

No. OF POLES

- 02 2 poles
- 03 3 poles
-
- 24 24 poles

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL 7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)


G RoHS compliant
(lead<4%)

In copper Alloy

0000: “@” Logo (Standard)
000A: “ANYTEK” MarkAny special item by
customer request.
please contact sales
department.**Amphenol**
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ 5.0 Series Without flange contact on up side							
PART NO.	TJxx71x6xxxxG			DWG NO.	8TJ0901				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Chen Bo 04/12-21	Chen Bo 04/12-21	UNIT: mm				X. ±0.50	
				SCALE: NONE				X.X ±0.30	
								X.XX ±0.10	
				SHEET: 01/01		REV.: E	X° ±1°		