

Amphenol
ANYTEK

— Terminal[®] Block —



INDUSTRIAL@AMPHENOL
TRUSTED GLOBALLY

Amphenol ANYTEK

As one of the member company of Amphenol Group, Anytek concentrates on terminal blocks designing and production over 20 years, our research and development ability will always provide customers with new designs, reasonable prices and efficient services to meet their various demands.



Taipei Head Quarter - Since 1997

Based on leading production technology, especially for automatic assembly, our high quality products bring best solution to different customers, and widely used in Electric Power, Industrial Control, Security and Protection, Lighting, Elevator, Info-communication and so on. All of our products meet UL, CSA or VDE regulations, and also EU Directive RoHS compliant.

Anytek set up sales network all over the world, Asia, Europe, America etc., worldwide customers also grant us quick knowledge on their new requirement and market development trend, which also is the important engine for Anytek to innovate insistently, and grow up with customers simultaneously.




Shenzhen Factory - Since 1998





Shanghai Factory - Since 2002

Fixed Type Terminal Block

	Wire Protector System	A1 -A11
	Rising Clamp System	B1-B27
	Spring Clamp System	C1-C31

Pluggable Type Terminal Block

	Pin-Plugs Pluggable System	D1-D8
	Socket for Pluggable System	E1-E56
	Screw Clamp Plugs for Pluggable System	F1-F25
	Spring Clamp Plugs for Pluggable System	G1-G21

Accessory

				H1-H6
---	---	---	--	-------

Barrier Terminal Block

			I1-I20
---	---	--	--------

Wire Connectors



PCB Sockets

*(1) Two piece contact

*(2) Six finger contact

TYPE		OP	OP	OP	OP	OP	OP	OL	EP	EX	KG	FW	OQ/ VL	OQ	OQ	OQ	VK	VK	VL	VL	H5
	Pitch	3.5/3.81 (ø1.3mm)	3.5 (ø1.0mm)	5.0 (ø1.3mm)	5.0 (ø1.1mm)	5.0 (ø1.0mm)	5.75	3.5	5.0	5.0	5.0	5.0	2.5	2.54 3.5 3.81	5.0 5.08	7.5 7.62	3.5 3.81	5.0 5.08	3.5 3.81	5.0 5.08	3.5 3.81
TH/TT	3.5/3.81	●																			
PS	3.5													●							
EH	3.5		●																		
TH	5.0			●							●										
TT/XD	5.0			●																	
TX/KR	5.0			●						●											
TY	5.0				●	●						●									
EO	5.0								● (1)	● (2)											
NY	3.5							●													
NU	3.5		●																		
NS	5.75							●													
HU	5.08																				
K8	3.81																				
TJ	3.5/3.81													●			●		●		●
TJ	5.0/5.08														●		●		●		●
TJ	5.0/5.08 Contact on up side														●		●		●		●
TJ	7.5/7.62															●					
TS	3.5/3.81													●			●		●		●
TS	5.0/5.08														●		●		●		●
TS	7.5/7.62															●					
VM	3.5/3.81													●			●		●		●
VM	5.0/5.08														●		●		●		●
VM	7.5/7.62															●					
V7	3.5/3.81													●							●
V7	5.0/5.08/7.5/7.62														●	●					
VD	3.81													●			●		●		●
KI	3.81																				
KI	5.08														●		●		●		●
EZ	5.0/5.08														●		●		●		●
EM	5.0/5.08														●		●		●		●
EM	7.5/7.62															●					
K5	5.08														●		●				
VH	5.08														●						
EY	5.08														●		●		●		
VR	5.08																				
V9	5.08																				
E5	6.35																				
KS	7.62																				
VB/ET	7.62																				
EV	10.16																				
KL/KJ	10.16																				
KX	15.0																				
HW	2.5												●								
HW	3.5/3.81													●			●		●		●
HW	5.0/5.08														●		●		●		●
HW	7.5/7.62															●					
NL	3.5																				
VW/N4	3.5																				
HN/E2	3.5																				
HN	5.08														●		●		●		●
KD	2.54/3.5/3.81/5.0/5.08													●	●		●		●		●
HP	3.81													●			●		●		●
HP	5.08														●		●		●		●
HI	5.0																				
HI	7.5															●					
HI	7.62															●					
H4	5.0/5.08														●		●		●		●
HO	5.0/7.5																				
NF	5.08														●		●				
NT	5.08														●						

Pluggable System





[illegible]

Type	Page	Type	Page	Type	Page	Type	Page
A		ET-7.62	F21	H6-10.0, Square hole	C21	HQ-5.0, Parallel & Interlace	C22
		ET-7.62, W/F	F21	H6-7.5 & 10.0, Round hole	C22	HQ-5.08, Parallel	C22
		ET-7.62, W/F(With handle)	F21	H7-5.0	C18	HQ-5.08, Interlace	C23
		ET-7.62, Match KT series	F22	H7-7.5	C18	HQ-7.62, Parallel	C23
AB	H6	EU-3.5, 3P Right & Left	E18	H8-10.0	C29	HQ-7.62, Interlace	C23
AC	H5	EU-3.5, 4P Right & Left	E19	H8-15.0	C29	HQ-10.16, Parallel & Interlace	C23
AD-5.08-16P / 18P	H5	EU-3.5, 5P Right & Left	E19	H8-20.0	C30	HR-5.08, Parallel	C23
AE-Key(70D)	H4	EU-5.0, 2P Right & Left	E19	H9-5.08	C22	HR-5.08, Interlace	C24
AF	H4	EU-5.0, 3P Right & Left	E20	HA-2.54, 180D / 90D	C6	HR-7.62, Parallel	C24
AG	H4	EU-5.0, 4P Right & Left	E20	HA-3.81, 180D	C6	HR-7.62, Interlace	C24
AH	H4	EV-10.16, W/O flange & W/F	F24	HA-3.81, 90D	C7	HR-10.16, Parallel	C24
AI	H3	EV-10.16, W/F(With handle)	F24	HA-5.0 & 5.08, 180D / 90D	C7	HR-10.16, Interlace	C24
AJ	H6	EW-10.16, Close, Vertical	E53	HA-7.5, 180D	C7	HS-5.0, Parallel	C24
AK	H6	EW-10.16, W/F, Vertical	E53	HA-7.5, 90D	C8	HS-5.0, Interlace	C25
AL-72mm, 2-72mm, 107mm, 122mm	H3	EW-10.16, Close, Right angle(down & up)	E53	HA-7.62 & 10.0, 180D / 90D	C8	HS-5.08, Parallel	C25
AM-15.2mm-20.2mm	H2	EW-10.16, W/F, Right angle(down)	E54	HB-3.81	C11	HS-5.08, Interlace	C25
AN	H2	EW-10.16, W/F, Right angle(up)	E54	HB-3.96, W/lever & W/O lever	C12	HS-7.5, Parallel	C25
ANAA	H3	EX-5.0, Standard	D8	HB-5.0, Single W/lever & W/O lever	C12	HS-7.5, Interlace	C25
AO-3.81 & 5.08	F16	EX-5.0, High type	D8	HB-5.0, Double W/lever	C12	HS-7.62, Parallel	C25
AP	H4	EY-5.08	F20	HB-7.5, Single W/O lever	C12	HS-7.62, Interlace	C26
AQ	H5	EZ-5.0	F17	HB-7.5, Single W/lever	C13	HS-10.0, Parallel	C26
AR	F17	EZ-5.0, W/F	F17	HB-7.5, Double W/lever	C13	HS-10.0, Interlace	C26
AS-3.81	H5	EZ-5.08	F17	HB-10.0, Single W/lever & W/O lever	C13	HS-10.16, Parallel	C26
AS-5.08	H5	EZ-5.08, W/F	F17	HB-10.0, Double W/lever	C13	HS-10.16, Interlace	C26
AT	H5			HC-2.5, High profile	C2	HT-5.0	C19
AU-Key(60D)	H4			HC-2.5, Standard	C3	HT-5.08	C20
AW	H6			HC-3.5	C3	HT-7.5	C20
				HC-7.0	C4	HT-7.62	C20
		F					
		FW-5.0	D8	HD-5.08	C22	HT-10.0	C20
				HE-2.5, W/lever & W/O lever	C4	HT-10.16	C20
				HE-2.54, W/lever	C4	HU-5.08	F25
				HE-2.54, W/O lever	C5	HV-3.81	C16
DS-240-5.0	C17			HE-5.0/5.08, W/lever	C5	HW-2.5	G2
DS-240-5.0, W/snap-in mounting feet	C17			HF-5.0, High profile	C17	HW-3.5	G2
		G		HF-5.0, Low profile(Stackable)	C18	HW-3.5, W/F	G2
				HG-5.0	C18	HW-3.81	G2
		GA-001	D6	HG-5.08	C19	HW-3.81, W/F	G2
		GB-001	D6	HG-7.62	C19	HW-5.0, Contact on down side	G2
		GW-5.0	D8	HG-10.0	C19	HW-5.0, W/F Contact on down side	G3
				HG-10.16	C19	HW-5.0, Contact on up side	G3
E2-3.5	F5			HH-5.0	C17	HW-5.0, W/F Contact on up side	G3
E4	B27			HI-5.0, With hook and pillar	G14	HW-5.08, Contact on down side	G3
E5-6.35, Screw type	F21			HI-5.0, With latch	G14	HW-5.08, W/F Contact on down side	G3
E5-6.35, Screwless type	G21			HI-5.0, With flange	G14	HW-5.08, W/latch Contact on down side	G3
		H					
E6-5.0, 2P & 3P & 4P Right & Left	B7	H2-7.5	C28	HI-5.0, With hook protected against mismatching	G14	HW-5.08, Contact on up side	G4
E7-5.0	A7	H2-10.0	C28	HI-5.0, With latch protected against mismatching	G14	HW-5.08, W/F Contact on up side	G4
E8-6.35	E50	H3-5.0	C20	HI-5.0, With flange protected against mismatching	G15	HW-5.08, Contact in the middle	G4
E9-15.24	B27	H3-7.5	C21	HI-7.5, With hook and pillar	G15	HW-5.08, W/F Contact in the middle	G4
EB-5.0, Interlace	B13	H3-10.0	C21	HI-7.5, With latch	G15	HW-5.08, Hook on back side	G4
EB-5.0, Parallel	B14	H4-5.0, Hook on entry side, W/O flange	G16	HI-7.5, With flange	G15	HW-7.5, Contact on down side	G4
EB-5.08, Interlace & Parallel	B14	H4-5.0, Hook on entry side, W/Flange	G16	HI-7.5, With hook protected against mismatching	G15	HW-7.5, W/F Contact on down side	G5
EC-3.5, W/O pillar & With pillar	A2	H4-5.0, Hook on back side	G17	HI-7.5, With flange protected against mismatching	G15	HW-7.62, Contact on down side	G5
ED-3.81	B6	H4-5.08, Hook on entry side	G17	HI-7.5, With latch protected against mismatching	G16	HW-7.62, W/F Contact on down side	G5
EF-5.0	B20	H4-5.08, Hook on back side, W/O flange	G17	HI-7.62, With hook and pillar	G16	HX-3.5, 180D, Double contact	C9
EH-3.5	D2	H4-5.08, Hook on back side, W/Flange	G17	HI-7.62, With latch	G16	HX-3.5, 90D, Single contact	C9
EI-15.0	B26	H5-3.5, W/O flange	G7	HI-7.62, With flange	G16	HX-3.5, 90D, Double contact	C9
EJ-19.0	B27	H5-3.5, Flange with nut	G7	HM-3.81, Dip solder	C13	HX-5.0, 180D	C9
EK-5.08	B20	H5-3.5, Flange with screw	G7	HM-7.62, Press fit	C14	HX-5.0, 90D	C10
EL-3.5, Vertical/Right angle, Open DIP	E16	H5-3.81, W/O flange	G7	HM-5.0, Dip solder	C14	HY-5.0	C17
EL-3.5, Vertical, Close DIP	E17	H5-3.81, Flange with nut	G7	HM-5.0, Press fit	C14		
EL-3.5, Right angle, Close DIP	E17	H5-3.81, Flange with screw	G7	HM-5.08, Dip solder	C14		
EL-3.5, Vertical/Right angle, W/F DIP	E17	H5-5.0, W/O flange	G8	HM-5.08, Press fit	C14		
EL-3.5, Vertical/Right angle, Open, THR	E17	H5-5.0, Flange with nut	G8	HM-7.5, Dip solder	C14		
EL-3.5, Vertical, Close, THR	E18	H5-5.0, Flange with screw	G8	HM-7.5, Press fit	C15		
EL-3.5, Right angle, Close, THR	E18	H5-5.08, W/O flange	G8	HM-7.62, Dip solder	C15	K3-3.5, Right angle, W/O flange	E42
EL-3.5, Vertical/Right angle, W/F THR	E18	H5-5.08, Flange with nut	G8	HM-7.62, Press fit	C15	K3-3.5, Right angle, W/flange	E42
EM-5.0	F18	H5-5.08, Flange with screw	G8	HM-10.0, Dip solder	C15	K3-3.5, Right angle, With latch	E43
EM-5.08 & 7.5	F19	H5-7.5, W/O flange	G9	HM-10.0, Press fit	C15	K3-3.5, Vertical, W/O flange	E43
EM-7.62	F19	H5-7.5, Flange with nut	G9	HM-10.16, Dip solder	C15	K3-3.5, Vertical, W/flange	E43
EN-12.5	A5	H5-7.5, Flange with screw	G9	HM-10.16, Press fit	C16	K3-3.5, Vertical, With latch	E43
EO-5.0, Solid block & High type	D4	H5-7.62, W/O flange	G9	HN-3.5, W/O flange & W/flange	G6	K4-5.08, Mounting fixed type	E49
EP-5.0	D7	H5-7.62, Flange with nut	G9	HN-5.08, W/O flange & W/flange	G6	K4-5.08, Dip solder type	E49
EQ-5.0, 180D / 90D	B8	H5-7.62, Flange with screw	G9	HO-5.0 & 7.5	G20	K5-5.08, W/O flange	F20
ER-3.5, 180D / 90D	B2	H6-5.0, Round hole	C21	HP-3.81, W/O flange & W/flange	G13	K5-5.08, W/flange	F20
ES-5.0	B6	H6-5.0, Square hole	C21	HP-5.08, W/O flange	G13	K5-5.08, W/latch	F20
		H6-7.5, Square hole	C21	HP-5.08, W/flange	G14	K6-4.5	B6

Type	Page	Type	Page	Type	Page	Type	Page
K7-7.5, Left & Right	B24	KP-6.35, Interlace	B23	NC-7.5, Vertical With hook holder	E47	OQ-7.5,Right angle,Close & W/F & Open	E8
K8-3.81	F5	KP-6.35, Back single row	B23	ND-3.5 & 5.0 & 7.5	G13	OQ-7.62,Vertical,Close & W/F & Open	E8
K9-15.0 & 17.5	B26	KP-6.35, Front single row	B23	NE-5.0 & 7.5	C18	OQ-7.62,Right angle,Close & W/F & Open	E9
KD-2.54	G10	KP-10.16, Double interlace tail	B23	NF-5.08, W/O flange & W/flange	G20	OQ-7.62,Right angle,Close,Body reverse	E9
KD-3.5, W/O flange & W/flange	G10	KP-10.16, Back single row	B23	NF-5.08, With latch	G20	OQ-2.5, THR,Right angle & Vertical,Close	E10
KD-3.5, W/latch	G10	KP-10.16, Front single row	B23	NH-3.5 & 5.0	C10	OQ-2.54, THR, Right angle & Vertical,W/F	E10
KD-3.5, W/O flange Double level	G11	KQ-10.16	B26	NI-3.81 & 5.08	C11	OQ-3.5, THR, Vertical, Close	E10
KD-3.5, W/flange Double level	G11	KR-5.0, Without hook	D4	NI-3.81 & 5.08, THR	C11	OQ-3.5, THR, Vertical, W/F	E11
KD-3.5, W/latch Double level	G11	KR-5.0, With hook	D4	NJ-3.5, 180D / 90D	C10	OQ-3.5, THR,Right angle,Close & W/F	E11
KD-3.81, W/O flange & W/flange	G11	KS-7.62, Vertical	E52	NJ-3.5, 180D	C10	OQ-3.5, Body reverse	E11
KD-3.81, W/latch	G11	KS-7.62, Vertical W/flange	E52	NJ-5.0, 90D	C11	OQ-3.81, THR, Vertical, Close & W/F	E11
KD-5.0, W/O flange	G12	KS-7.62, Right angle, PCB down	E52	NK-7.5, 180D, Parallel tail A type	C26	OQ-3.81, THR, Right angle, Close	E12
KD-5.0, W/flange	G12	KS-7.62, Right angle, PCB up	E52	NK-7.5, 90D, Parallel tail A type	C27	OQ-3.81, THR, Right angle, W/F	E12
KD-5.0, W/O flange	G12	KS-7.62, Right angle, W/F PCB down	E53	NK-7.5, 180D / 90D, Interlace tail B type	C27	OQ-5.08, THR, Vertical, Close & W/F	E12
KD-5.08, W/O flange	G12	KS-7.62, Right angle, W/F PCB up	E53	NK-7.5, 180D / 90D, Single tail C type	C27	OQ-5.08, THR,Right angle,Close & W/F	E12
KD-5.08, W/flange	G12	KT-7.62, Without flange	F23	NK-7.5, 90D, B type	C27		
KD-5.08, W/latch	G12	KT-7.62, With flange screw type	F23	NK-7.5, 90D, C type	C28		
KE-3.5, Vertical & Right angle, Close	E29	KT-7.62, W/flange screw, W/handle	F23	NL-3.5	G5		
KE-3.5, Vertical, W/F	E30	KT-7.62, W/flange nut, W/Handle	F23	NL-3.5, With operating lever, 2*18P	G6		
KE-3.5, Right angle, W/F	E30	KT-7.62, W/flange nut Through the panel type	F23	NM-3.5, 180D	C8		
KE-3.5, Vertical & Right angle, W/L	E30	KU-15.0, Vertical & Right angle, Close	E55	NM-3.5, 90D / 45D	C9	PD-5.0	E48
KE-3.81, Vertical & Right angle, Close	E30	KU-15.0, Vertical, W/F	E55	NP-10.0, 90D, Parallel tail A type	C28	PD-7.5	E48
KE-3.81, Vertical, W/F	E31	KU-15.0, Right angle, W/F	E56	NP-10.0, 90D, Interlace tail B type	C28	PF-5.08	D8
KE-3.81, Right angle, W/F	E31	KU-15.0, Vertical, W/F and shield feed-through on the inside of the device	E56	NP-10.0, 180D, Interlace tail A type	C28	PS-3.5	G21
KE-3.81, Vertical & Right angle, W/L	E31	KU-15.0, Right angle, W/F and shield feed-through on the inside of the device	E56	NP-10.0, 180D, B type / C type	C29		
KE-5.0, Vertical & Right angle, Close	E32	KV-5.08, With hook & low profile	F15	NQ-2.5	C5		
KE-5.0, Right angle, W/F	E32	KV-5.08,Flange with screw & low profile	F15	NQ-3.0 & 4.0	C6		
KE-5.0, Vertical & Right angle, W/L	E32	KV-5.08, Flange with nut & low profile	F16	NR-3.5, B type, THT	E29	T2-5.0, Stackable & Solid block	B9
KE-5.0, Vertical & Right angle, Open	E32	KV-5.08, With hook & high profile	F16	NR-3.5, B type, THR	E29	T2-5.08, Solid block	B9
KE-5.08, Vertical, Close	E33	KV-5.08,Flange with screw&high profile	F16	NS-5.75, With or Without hole	D5	T3-5.0, 2-Interlock	A6
KE-5.08, Right angle, Close	E33	KV-5.08, Flange with nut & high profile	F16	NT-5.08	G20	T3-5.0, 180D Solid block	A7
KE-5.08, Vertical & Right angle, W/F	E33	KX-15.0	F25	NU-3.5	D5	T3-5.0, 90D	A7
KE-5.08, Vertical & Right angle, W/L	E33	KX-15.0, With flange	F25	NX-5.0	C17	T3-5.0, 90D Solid block 4p / 5p	A7
KE-3.5, Vertical, Close THR	E34	KX-15.0, With flange and handle	F25	NY-3.5	D5	T4-5.0, Solid block	A9
KE-3.5, Right angle, Close THR	E34	KY-5.0, 180D, Square hole-horizontal	A6	NZ-7.5	C30	T4-5.0, Connector through type	A9
KE-3.5, W/F & W/L THR	E34	KY-5.0, 90D, Square hole-vertical	A6	NZ-10.0, With or W/O jumper slot	C30	T4-7.5	A10
KE-3.81, Vertical, Close THR	E35	KY-5.0, 180D, Round hole-horizontal	A6	NZ-15.0, With jumper slot	C30	T5-3.5	A2
KE-3.81, Right angle, Close THR	E35	KY-5.0, 90D, Round hole-vertical	A6	NZ-15.0, Without jumper slot	C31	T7-6.35, 180D / 45D	B22
KE-3.81, W/F & W/L THR	E35	KZ-3.5, 45D wire inlet, Round hole	A3			T7-7.62, New type 180D	B22
KE-5.0, Vertical, Close THR	E36	KZ-3.5, 45D wire inlet, Square hole	A3			T7-7.62, 180D	B22
KE-5.0, Right angle, Close THR	E36	KZ-5.0, 45D wire inlet, Round hole	A3			T7-9.52, 180D / 45D	B22
KE-5.0, W/F & W/L THR	E36	KZ-5.0, 45D wire inlet, Square hole	A3			T9-5.08	A8
KE-5.0, Vertical, Open THR	E37					TA-5.0, 2-Interlock	A8
KE-5.0, Right angle, Open THR	E37						
KE-5.08, Close & W/F THR	E37					TA-5.08, 1-Interlock	A9
KE-5.08, Vertical, W/L THR	E38					TA-7.5, 1-Interlock	A9
KE-5.08, Right angle, W/L THR	E38					TB-5.0, 2-Interlock	A7
						TB-5.08, 1-Interlock	A7
KF-3.5 & 5.0 & 7.5	E56	N4-3.5, With operating lever	G21	OP-5.0, Bend pin	D7	TC-5.0, 1-Interlock / HI-Temp	A8
KG-5.0	D8	N6-6.35	C31	OP-5.75	D7	TC-5.0, 2-Interlock	A8
KH-6.35, 180D wire inlet	A10	N9-3.81	C31	OP-8.0	D7	TC-5.0, 2-Interlock, Solid block	A8
KH-6.35, 90D wire inlet	A10			OQ-2.5, Vertical & Right angle	E2	TC-5.08, 2-Interlock	A8
KH-7.62, 180D wire inlet	A10	NA-2.5 & 2.54, 90D & 180D	C2	OQ-2.54,THT type,Vertical & Right angle	E2	TD-5.0, 2-Interlock	A5
KH-7.62, 90D wire inlet	A10	NB-5.0, W/O flange & W/flange	G18	OQ-2.54,SMT type,Vertical & Right angle	E9	TE-3.5	A2
KI-3.81	F14	NB-5.0, W/O flange protected against mismatching	G18	OQ-3.5, Vertical, W/O flange & W/F	E2	TE-3.5, Solid block	A2
KI-3.81, With flange	F14			OQ-3.5, Right angle, W/O flange & W/F	E3	TF-3.5	A2
KI-3.81, W/O Flange, With high profile	F14	NB-5.0, W/flange protected against mismatching	G18	OQ-3.5, Vertical, With latch holder	E3	TG-5.0, Long interlock	B10
KI-3.81, W/Flange, With high profile	F14			OQ-3.5, Right angle, With latch holder	E3	TG-5.0, Solid block	B11
KI-5.08	F15	NB-5.0, Snap-in mounting feet	G18	OQ-3.81, Vertical, W/O flange & W/F	E3	TG-5.08, Long interlock	B11
KI-5.08, With flange	F15			OQ-3.81, Right angle,W/O flange & W/F	E4	TH-3.5	D2
KI-5.08, W/O Flange, With high profile	F15	NB-5.0, Snap-in mounting feet protected against mismatching	G18	OQ-3.5 & 3.81, SMT type	E10	TH-3.5, Solid block	D2
KI-5.08, W/Flange, With high profile	F15			OQ-5.0, Right angle, W/latch holder	E4	TH-3.81	D2
KJ-10.16	E55	NB-7.5, W/O flange & W/flange	G19	OQ-5.0, Vertical, W/latch holder	E4	TH-3.81, Solid block	D2
KK-10.16	F24			OQ-5.0, Vertical, Close & W/F	E4	TH-5.0	D2
KK-10.16, Flange with screw	F24	NB-7.5, W/O flange protected against mismatching	G19	OQ-5.0, Vertical, Open	E5	TH-5.0, Solid block	D3
KK-10.16,Flange with screw W/handle	F24			OQ-5.0, Right angle, Close & W/F	E5	TI-5.0, 2-Interlock	B20
KK-10.16, Flange with nut	F25	NB-7.5, W/flange protected against mismatching	G19	OQ-5.0, Right angle, Open	E5	TI-5.0, Solid block	B20
KK-10.16, Flange with nut W/handle	F25			OQ-5.0,Right angle,W/F,Body reverse	E5	TI-7.5, 2-Interlock	B20
KL-10.16, Vertical, Close	E54	NB-7.5, Snap-in mounting feet	G19	OQ-5.08,Right angle,W/F,Body reverse	E5	TI-7.62, Solid block	B20
KL-10.16, Vertical, With flange	E54	NB-7.5, Snap-in mounting feet protected against mismatching	G19	OQ-5.08,Right angle,Close,Body reverse	E6	TJ-3.5	F2
KL-10.16, Right angle PCB up	E54			OQ-5.08, Vertical, Close & W/F & Open	E6	TJ-3.5, With flange	F2
KL-10.16, W/F Right angle PCB up	E54	NC-5.0, Right angle & Vertical	E46	OQ-5.08, Right angle, Close & W/F	E6	TJ-3.81, Stackable	F2
KL-10.16, Right angle PCB down	E55	NC-5.0, Right angle With hook holder	E47	OQ-5.08, Right angle, Open	E7	TJ-3.81, With flange	F2
KL-10.16, W/F Right angle PCB down	E55	NC-5.0, Vertical With hook holder	E47	OQ-5.08, Vertical, With latch holder	E7	TJ-3.5 & 3.81, With handle	F2
KO-9.52, Interlace tail	B24	NC-7.5, Right angle & Vertical	E47	OQ-5.08,Right angle,With latch holder	E7	TJ-5.0 & 5.08, With handle	F2
KO-9.52, Back single row	B24	NC-7.5, Right angle With hook holder	E47	OQ-7.5,Vertical,Close & W/F & Open	E7	TJ-5.0, Contact on down side	F3

Type	Page	Type	Page	Type	Page	Type	Page
TJ-5.0, W/F, Contact on down side	F3	V		VE-3.81, Vertical Close	E43	VM-3.5, W/F	F10
TJ-5.0, Contact on up side	F3			VE-3.81, Right angle Close	E43	VM-3.81	F10
TJ-5.0, W/F, Contact on up side	F3			VE-3.81, Vertical Open	E44	VM-3.81, W/F	F10
TJ-5.08, Contact on down side	F3			VE-3.81, Right angle Open	E44	VM-5.0	F10
TJ-5.08, W/F, Contact on down side	F3	V3-5.0, Left	B8	VE-3.81, Vertical W/F	E44	VM-5.0, W/F	F10
TJ-7.62	F4	V3-5.0, Right	B8	VE-3.81, Right angle W/F	E44	VM-5.08	F11
TJ-5.08, W/F, Contact on up side	F4	V4	B27	VF-3.81, Vertical Close	E39	VM-5.08, W/F	F11
TJ-5.08, With latch holer	F4	V5-3.81, Bottom cover fixed type	E45	VF-3.81, Vertical W/F	E39	VM-5.08, Low profile	F11
TJ-7.5, W/O Flange / With flange	F4	V5-3.81, W/F Bottom cover fixed type	E45	VF-3.81, Right angle Close	E40	VM-5.08, Low profile With flange	F11
TJ-7.62	F4	V5-3.81, Dinrail holder A type	E45	VF-3.81, Right angle W/F	E40	VM-7.5, Low profile	F11
TJ-7.62, With flange	F5	V5-3.81, W/F Dinrail holder A type	E45	VF-5.0, Vertical Open	E40	VM-7.5, Low profile With flange	F11
TM	A10	V5-5.08, Bottom cover fixed type	E45	VF-5.0, Right angle Open	E40	VM-7.62, Low profile	F12
TN-4.5, 180D Without cover	C16	V5-5.08, W/F Bottom cover fixed type	E45	VF-5.0, Vertical Close	E40	VM-7.62, Low profile With flange	F12
TN-4.5, 180D With cover	C16	V5-5.08, Dinrail holder A type	E46	VF-5.0, Vertical W/F	E40	VN-2.54, Solid block	B2
TN-4.57, 90D Without cover	C16	V5-5.08, W/F Dinrail holder A type	E46	VF-5.0, Right angle Close	E41	VO-3.5, Vertical Close	E38
TN-4.57, 90D With cover	C16	V5-5.08, Dinrail holder B type	E46	VF-5.0, Right angle W/F	E41	VO-3.5, Vertical W/F	E38
TO-5.0	B8	V5-5.08, W/F Dinrail holder B type	E46	VF-5.08, Vertical Open	E41	VO-3.5, Right angle Close	E38
TO-5.0, Solid block	B8	V7-3.5, Vertical	E22	VF-5.08, Right angle Open	E41	VO-3.5, Right angle W/F	E38
TR-3.81, 180D	A3	V7-3.5, Vertical W/F	E22	VF-5.08, Vertical Close	E41	VO-3.81, Vertical Close	E39
TR-3.81, 90D	A3	V7-3.5, Right angle	E22	VF-5.08, Vertical W/F	E41	VO-3.81, Vertical W/F	E39
TR-5.0, 180D / (Special Row 10.0mm)	A4	V7-3.5, Right angle W/F	E22	VF-5.08, Right angle Close	E42	VO-3.81, Right angle Close	E39
TR-5.0, 90D	A4	V7-3.81, Vertical	E23	VF-5.08, Right angle W/F	E42	VO-3.81, Right angle W/F	E39
TR-7.5, 180D / (Special Row 10.0mm)	A4	V7-3.81, Vertical W/F	E23	VF-5.08, Vertical Close High type	E42	VP-10.16, Single tail type	B24
TR-7.5, 90D	A4	V7-3.81, Right angle	E23	VF-5.08, Vertical W/F High type	E42	VP-10.16, Double parallel tail type(5.08mm)	B24
TR-10.0, 180D	A5	V7-3.81, Right angle W/F	E23	VH-5.08	F20	VP-10.16, Double parallel tail type(4.0mm)	B25
TR-10.0, 90D	A5	V7-5.0, Vertical	E23	VH-5.08, W/F	F20	VP-10.16, Double interlace tail type	B25
TR-10.0, 180D/(Special Row 10.0mm)	A5	V7-5.0, Vertical W/F	E23	VI-5.0, 180D	B15	VP-12.7, Single tail type	B25
TS-3.5, Hook on entry side	F6	V7-5.0, Right angle	E24	VI-5.0, 90D	B16	VP-12.7, Double parallel tail type(5.08mm)	B25
TS-3.5, W/F, Hook on entry side	F6	V7-5.0, Right angle W/F	E24	VI-5.08, 180D	B16	VP-12.7, Double parallel tail type(4.0mm)	B25
TS-3.5, Hook on back side	F6	V7-5.08, Vertical	E24	VI-5.08, 90D	B16	VP-12.7, Double interlace tail type	B25
TS-3.5, W/F, Hook on back side	F6	V7-5.08, Vertical W/F	E24	VI-5.08, 180D Solid block	B16	VQ-3.5, Dip solder & Solid block	B3
TS-3.81, Hook on entry side	F6	V7-5.08, Right angle	E24	VI-5.08, 90D Solid block	B16	VQ-3.81, Dip solder & Solid block	B4
TS-3.81, W/F, Hook on entry side	F6	V7-5.08, Right angle W/F	E24	VI-7.5, 180D	B16	VQ-3.5, Press fit & Solid block	B4
TS-3.81, Hook on back side	F7	V7-7.5, Vertical	E25	VI-7.5, 90D	B17	VQ-3.81, Press fit & Solid block	B4
TS-3.81, W/F, Hook on back side	F7	V7-7.5, Vertical W/F	E25	VJ-5.0, 180D	B17	VR-5.08, Contact on down side	F18
TS-5.0, Hook on entry side	F7	V7-7.5, Right angle	E25	VJ-5.0, 180D Solid block	B17	VR-5.08, W/F Contact on down side	F18
TS-5.0, W/F, Hook on entry side	F7	V7-7.5, Right angle W/F	E25	VJ-5.0, 90D	B17	VR-5.08, Contact on up side	F18
TS-5.0, Hook on back side	F7	V7-7.62, Vertical	E25	VJ-5.0, 90D Solid block	B17	VR-5.08, W/F Contact on up side	F18
TS-5.0, W/F, Hook on back side	F7	V7-7.62, Vertical W/F	E25	VJ-5.08, 180D	B17	VS-5.08, Close Vertical	E48
TS-5.08, Hook on entry side	F8	V7-7.62, Right angle	E26	VJ-5.08, 180D Solid block	B18	VS-5.08, W/F Vertical	E48
TS-5.08, W/F, Hook on entry side	F8	V7-7.62, Right angle W/F	E26	VJ-5.08, 90D	B18	VS-5.08, Close Right angle	E48
TS-5.08, Hook on back side	F8	V8-3.81, W/O Flange	F12	VJ-5.08, 90D Solid block	B18	VS-5.08, W/F Right angle	E48
TS-5.08, W/F, Hook on back side	F8	V8-3.81, Flange with nut	F12	VJ-7.5, 180D	B18	VT-5.08	B21
TS-7.5, Hook on entry side	F8	V8-3.81, Flange with screw	F12	VJ-7.5, 180D Solid block	B18	VV-6.35	B21
TS-7.5, W/F, Hook on entry side	F8	V8-3.81, W/F nut Through the panel	F12	VJ-7.5, 90D	B18	VV-9.52	B21
TS-7.5, Hook on back side	F9	V8-5.08, W/O Flange / Flange with nut	F13	VJ-7.5, 90D Solid block	B19	VW-3.5, W/O flange & W/flange	G10
TS-7.5, W/F, Hook on back side	F9	V8-5.08, Flange with screw	F13	VJ-7.62, 180D or 90D	B19	VX-3.5, Vertical Open	E26
TS-7.62, Hook on entry side	F9	V8-5.08, W/F nut Through the panel	F13	VJ-7.62, 180D Solid block	B19	VX-3.5, Right angle Open	E26
TS-7.62, W/F, Hook on entry side	F9	V8-5.08, W/F nut Through the panel type With latch	F13	VJ-7.62, 90D Solid block	B19	VX-3.5, Vertical & Right angle Close	E26
TS-7.62, Hook on back side	F9	V8-7.62, Flange with nut	F14	VJ-7.62, 180D, Low profile type	B19	VX-3.5, Vertical & Right angle W/F	E27
TS-7.62, W/F, Hook on back side	F9	V8-7.62, Flange with screw	F14	VK-3.5, 45D	E20	VX-3.5, Vertical Open(THR Tape reel)	E27
TT-3.5	D3	V9-5.08, Bottom cover fixed type	E49	VK-3.5, 45D W/F	E20	VX-3.5, Right angle Open(THR Tape reel)	E27
TT-3.81	D3	V9-5.08, W/F Bottom cover fixed type	E49	VK-3.81, 45D	E21	VX-3.5, Close(THR Tape reel)	E27
TT-5.0	D3	V9-5.08, Dinrail holder A type	E49	VK-3.81, 45D W/F	E21	VX-3.5, W/F(THR Tape reel)	E28
TT-5.0, Solid block	D3	V9-5.08, W/F Dinrail holder A type	E49	VK-5.0, 45D Close	E21	VY-5.0, HI Temp	A5
TU-5.08	B21	V9-5.08, W/F Dinrail holder A type	E49	VK-5.0, 45D W/F	E21	VY-5.0	A6
TV-3.5	B2	V9-5.08, Dinrail holder B type	E50	VK-5.0, 45D Open	E21	VZ-3.81	E44
TV-3.81	B3	V9-5.08, W/F Dinrail holder B type	E50	VK-5.08, 45D Close	E21	VZ-5.08	E44
TV-5.0, Solid block	B3	VA-5.0, 1-Interlock	A9	VK-5.08, 45D W/F	E22		
		VA-7.5, 1-Interlock	A9	VK-5.08, 45D Open	E22		
TW-10.0	A11	VB-7.62	F21	VL-2.5, Vertical Close	E13	W	
TX-5.0, Round hole	D3	VB-7.62, W/flange	F21	VL-2.5, Right angle Close	E13		
TX-5.0, Square hole	D4	VC-7.62, Right angle, Two tail	E50	VL-3.5, Vertical & Right angle, Close	E13		
TY-5.0, Solid block	D4	VC-7.62, Right angle W/F, Two tail	E50	VL-3.5, Vertical & Right angle, W/F	E13		
TZ-3.5, W/O pillar & With pillar	B6	VC-7.62, Vertical, Two tail	E50	VL-3.5, Vertical Close B type	E14	WQ-15	D5
TZ-5.0, With pillar	B6	VC-7.62, Vertical W/F, Two tail	E51	VL-3.5, Right angle Close B type	E14	WS-02	C31
		VC-7.62, Right angle, Three tail, PCB Down	E51	VL-3.5, Vertical & Right angle, W/F B type	E14		
		VC-7.62, Right angle, Three tail, PCB UP	E51	VL-3.81, Vertical & Right angle	E14		
		VC-7.62, Right angle W/F, Three tail, PCB Down	E51	VL-3.81, Vertical W/F	E15		
		VC-7.62, Right angle W/F, Three tail, PCB UP	E51	VL-3.81, Right angle W/F	E15		
		VC-7.62, Vertical Close, Three tail	E51	VL-5.0, Vertical & Right angle, Close	E15	X	
		VC-7.62, Vertical W/F, Three tail	E52	VL-5.0, Vertical & Right angle, W/F	E15		
		VC-7.62, Feed-through header with slip-on connection	E52	VL-5.08, Vertical Close	E16		
		VD-3.81	F5	VL-5.08, Right angle Close	E16		
		VD-3.81, W/F	F5	VL-5.08, Vertical & Right angle, W/F	E16	XA-6.35	C31
				VM-3.5	F10	XA-8.60	C31
						XA-6.35, 180D	C31
						XD-5.0	D3



Type	Page	Type	Page	Type	Page	Type	Page
Y		YK-444-9.5	I9	YQ-3.5, L, (YO+YP)	B4		
		YK-445-9.5	I10	YQ-3.5, R, (YO+YP)	B4		
		YK-446-9.5	I10	YQ-3.81, L, (YO+YP)	B4		
		YK-447-9.5	I10	YQ-3.81, R, (YO+YP)	B5		
YA-3.5	B5	YK-44A-9.5	I10	YQ-3.81, L, (ED+YP), High type	B5		
YA-3.81	B5	YK-44B-9.5	I10	YQ-3.81, R, (ED+YP), High type	B5		
YA-3.81, Solid block	B5	YK-501-9.5, With cover	I10	YR-5.0	B11		
YB-5.08	B21	YK-501-9.5, W/O cover	I11	YR-5.08	B11		
YC-5.08	B21	YK-503-9.5, With cover	I11	YS-5.0, Double level	B12		
YD-5.0	B9	YK-503-9.5, W/O cover	I11	YS-5.08, Double level	B12		
YD-5.08	B9	YK-504-9.5, With cover	I11	YT-5.0	B15		
		YK-504-9.5, W/O cover	I11	YT-5.08	B15		
YE-5.0, 2nd-level	B10	YK-505-9.5, With cover	I11				
YE-5.0, 2nd-level Solid block	B10	YK-505-9.5, W/O cover	I12				
YE-5.08, 2nd-level	B10	YK-506-9.5, With cover	I12				
YE-5.08, 2nd-level Solid block	B10	YK-506-9.5, W/O cover	I12				
YF-5.0, 3rd-level	B9	YK-50A-9.5, With cover	I12				
YF-5.08, 3rd-level	B10	YK-50A-9.5, W/O cover	I12				
YG-5.0	B11	YK-50B-10.0, With cover	I17				
YG-5.08	B11	YK-510-9.5	I12				
YH-5.0	B14	YK-511-9.5	I13				
YH-5.08	B15	YK-512-9.5	I13				
YI-5.0	B15	YK-513-9.5	I13				
YI-5.08	B15	YK-514-9.5	I13				
YJ114	I20	YK-515-9.5	I13				
YJ100, 74A & 114A & 140A	I20	YK-516-9.5	I13				
YK-111-11.0	I18	YK-551-11.0	I17				
YK-112-11.0	I18	YK-552-11.0	I18				
YK-113-11.0	I19	YK-553-11.0	I18				
YK-114-11.0	I19	YK-554-11.0	I18				
YK-11E-11.0, 4P	I19	YK-555-11.0	I18				
YK-211-6.35	I2	YK-601-10.0, With cover	I14				
YK-221-6.35	I2	YK-601-10.0, W/O cover	I14				
YK-222-6.35	I2	YK-602-10.0, With cover	I14				
YK-223-6.35	I2	YK-602-10.0, W/O cover	I14				
YK-224-6.35	I2	YK-603-10.0, With cover	I14				
YK-301-7.62, With cover	I3	YK-603-10.0, W/O cover	I15				
YK-301-7.62, W/O cover	I3	YK-604-10.0, With cover	I15				
YK-302-7.62, With cover	I3	YK-604-10.0, W/O cover	I15				
YK-302-7.62, W/O cover	I3	YK-605-10.0, With cover	I15				
YK-303-7.62, With cover	I3	YK-605-10.0, W/O cover	I15				
YK-303-7.62, W/O cover	I3	YK-606-10.0, With cover	I15				
YK-304-7.62, With cover	I4	YK-606-10.0, W/O cover	I16				
YK-304-7.62, W/O cover	I4	YK-612-10.0	I16				
YK-304-7.62, High profile	I4	YK-613-10.0	I16				
YK-305-7.62, With cover	I4	YK-614-10.0	I16				
YK-305-7.62, W/O cover	I4	YK-615-10.0	I16				
YK-306-7.62, With cover	I4	YK-616-10.0	I16				
YK-306-7.62, W/O cover	I5	YK-661-7.62	I6				
YK-311-7.62	I5	YK-701-11.0, With cover	I17				
YK-312-7.62	I5	YK-701-11.0, W/O cover	I17				
YK-313-7.62	I5	YK-70A-11.0, With cover	I17				
YK-314-7.62	I5	YK-70A-11.0, W/O cover	I17				
YK-315-7.62	I5	YK-771-9.52	I14				
YK-316-7.62	I6	YK-881-12.7	I19				
YK-321-7.62	I6	YK-901-16.0, With & W/O cover	I19				
YK-331-8.25	I6	YK-902-16.0, With cover	I20				
YK-332-8.25	I6	YK-902-16.0, W/O cover	I20				
YK-333-8.25	I6	YK-991-7.0	I2				
YK-334-8.25	I7	YL-5.0, L, (YD+YE)	B12				
YK-335-8.25	I7	YL-5.0, R, (YD+YE)	B12				
YK-401-8.25, With cover	I7	YL-5.08, L, (YD+YE)	B12				
YK-401-8.25, W/O cover	I7	YL-5.08, R, (YD+YE)	B12				
YK-402-8.25, With cover	I7	YL-5.08, R, (Solid block)	B13				
YK-402-8.25, W/O cover	I7	YM-5.0, L, (YE+YF)	B13				
YK-403-8.25, With cover	I8	YM-5.0, R, (YE+YF)	B13				
YK-403-8.25, W/O cover	I8	YM-5.08, L, (YE+YF)	B13				
YK-411-8.25	I8	YM-5.08, R, (YE+YF)	B13				
YK-412-8.25	I8	YN-5.0	B14				
YK-413-8.25	I8	YN-5.08, (YD+YE+YF)	B14				
YK-414-8.25	I8	YO-3.5, 1st-Level & Solid block	B2				
YK-415-8.25	I9	YO-3.81, 1st-Level & Solid block	B2				
YK-421-8.25	I9	YP-3.5, 2nd-Level & Solid block	B3				
YK-441-9.5	I9	YP-3.81, 2nd-Level & Solid block	B3				
YK-442-9.5	I9	YP-3.81, High type	B3				
YK-443-9.5	I9						

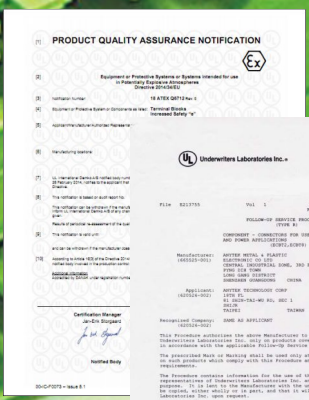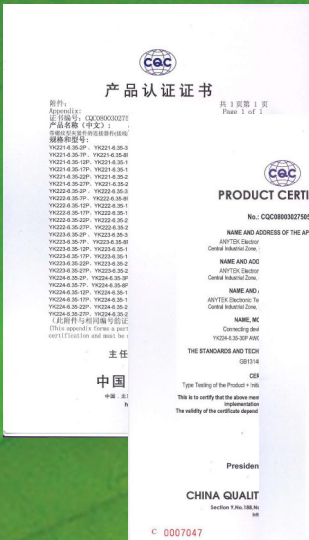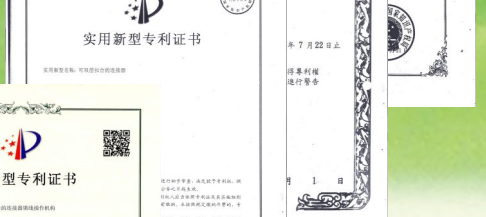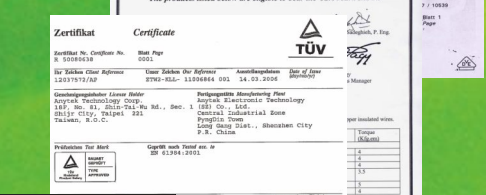

Wire Protector System




A

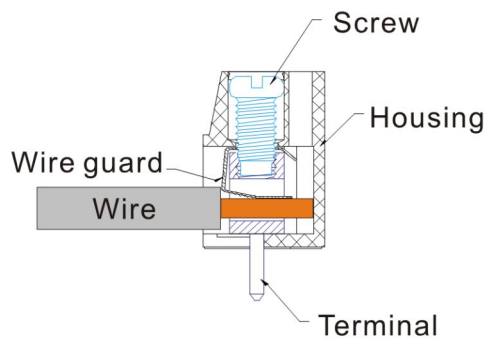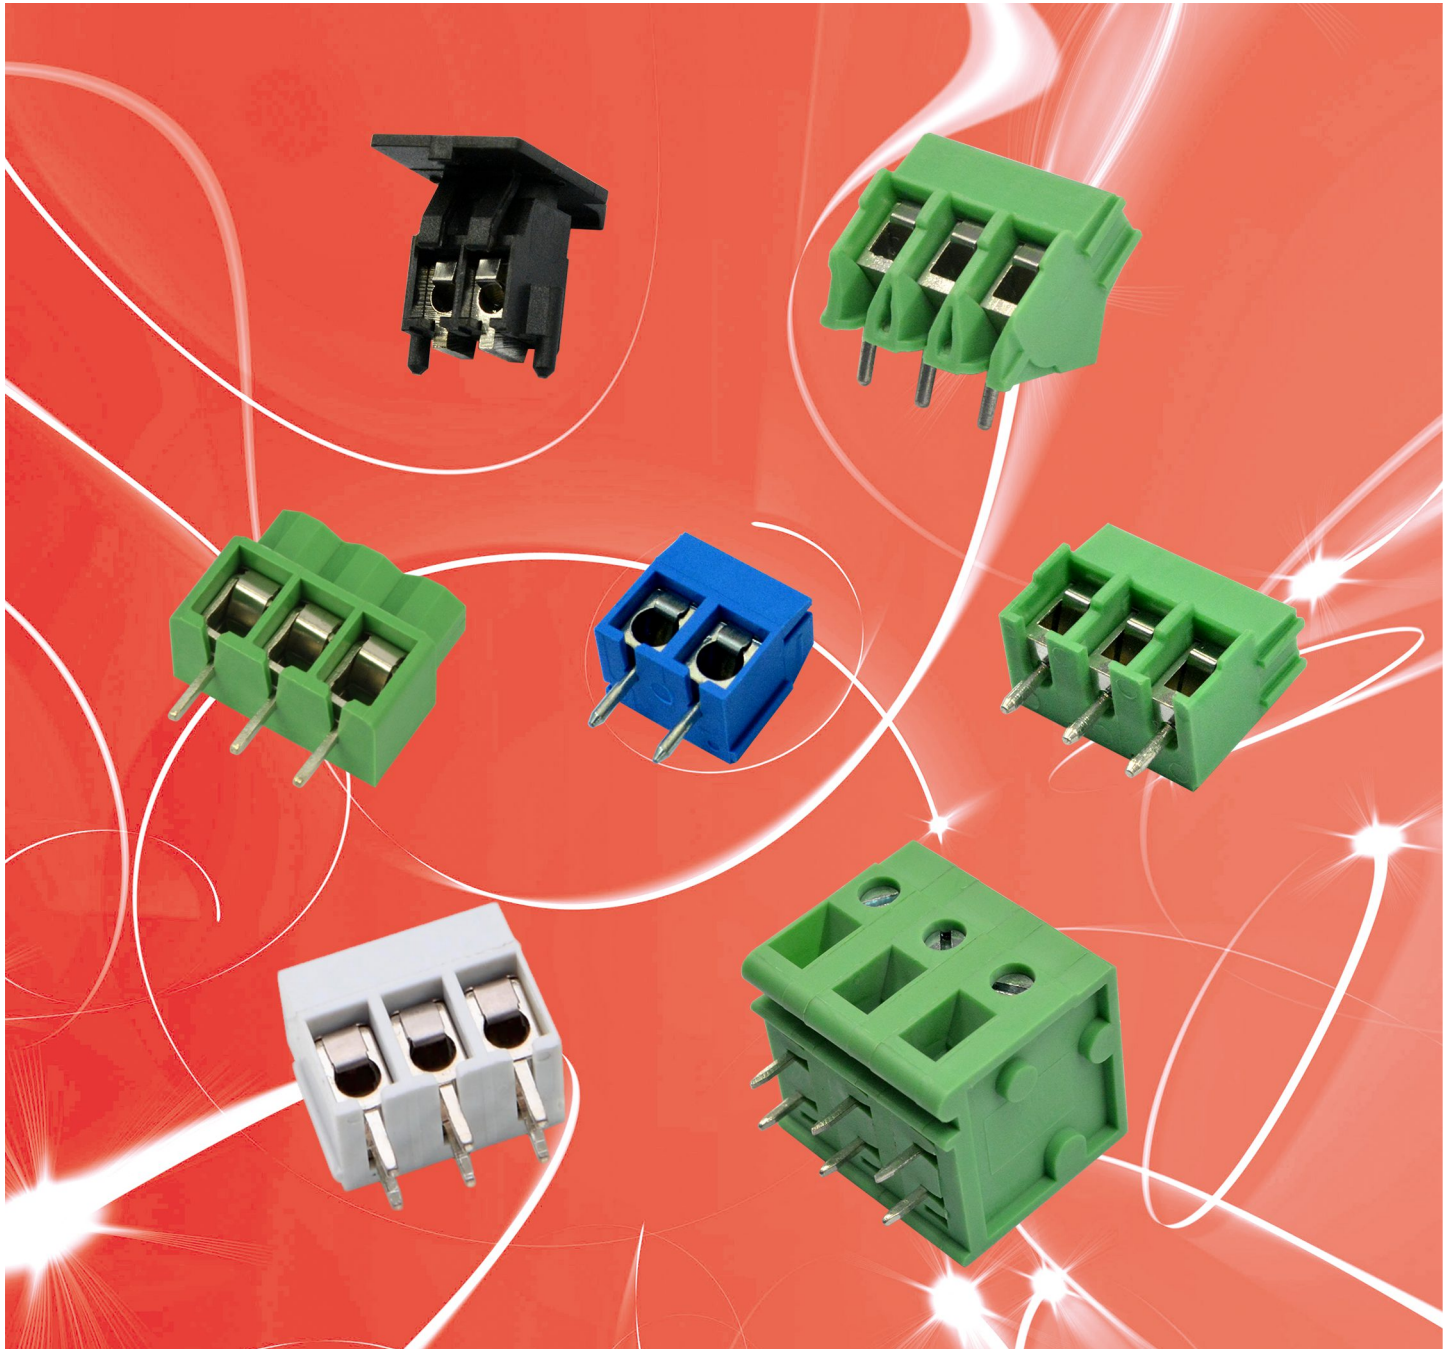


Pitch: 3.5, 3.81, 5.0, 5.08, 6.35, 7.5, 7.62, 10.0, 12.5
Rated Voltage Range(cULus): 125V-600V
Rated Current Range(cULus): 8A-57A

TE




Pitch 3.5mm
Poles 2p/3p
TExx01610000G*
Number of poles

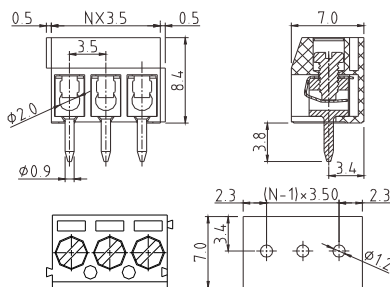


Electrical:	cULus
Voltage rating:	125V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.25KV
Safety Approval:	

TE




Pitch 3.5mm
Solid block
Poles 4p~24p
TExx01640000G*
Number of poles

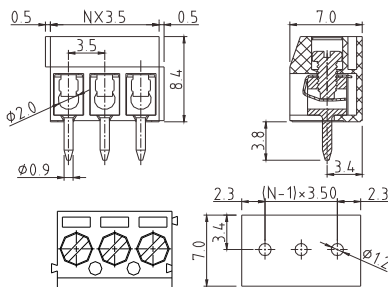


Electrical:	cULus
Voltage rating:	125V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.25KV
Safety Approval:	

T5




Pitch 3.5mm
Solid block
Poles 2p~24p
T5xx01500000G*
Number of poles

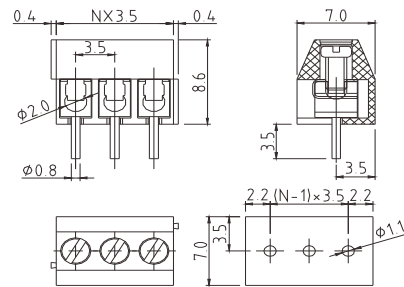


Electrical:	cULus
Voltage rating:	125V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.25KV
Safety Approval:	

TF




Pitch 3.5mm
Poles 2p/3p
TFxx01610000G*
Number of poles

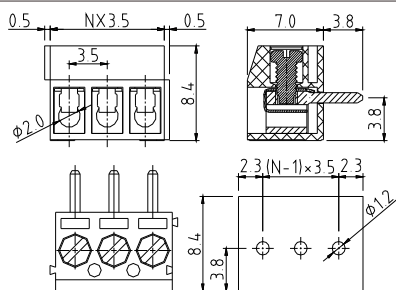


Electrical:	UL
Voltage rating:	125V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.25KV
Safety Approval:	

EC




Pitch 3.5mm
Poles 2p~16p
SMT type(W/O pillar)
ECxx1000B000G*
Number of poles

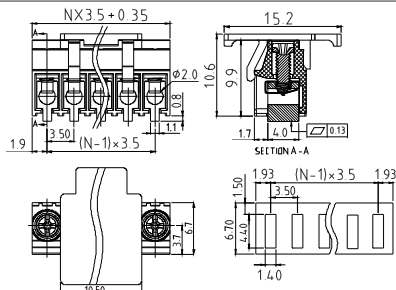


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	2.0

Screw:	M2.0
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	pending

EC




Pitch 3.5mm
Poles 2p~16p
SMT type(With pillar)
ECxx1001B000G*
Number of poles

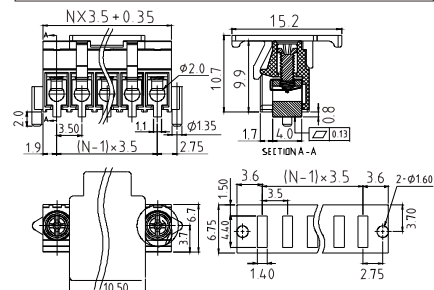


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	2.0

Screw:	M2.0
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	pending

KZ




Pitch 3.5mm
Poles 2p/3p
45D wire inlet (Round hole)
KZxx10510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	1.1

Screw:	M2.0
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KZ




Pitch 3.5mm
Poles 2p/3p
45D wire inlet (Square hole)
KZxx10500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	1.1

Screw:	M2.0
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KZ




Pitch 5.0mm
Poles 2p/3p
45D wire inlet (Round hole)
KZxx70510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Torque(Lb-In) :	3.5

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KZ




Pitch 5.0mm
Poles 2p/3p
45D wire inlet (Square hole)
KZxx70500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Torque(Lb-In) :	2.4

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR




Pitch 3.81mm
Horizontal(180D wire inlet)
Poles 1p~24p
TRxx35510000G*(Row spacing 7.62mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	2.0

Screw:	M2
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR




Pitch 3.81mm
Vertical(90D wire inlet)
Poles 1p~24p
TRxx35500000G*(Row spacing 7.62mm)
Number of poles

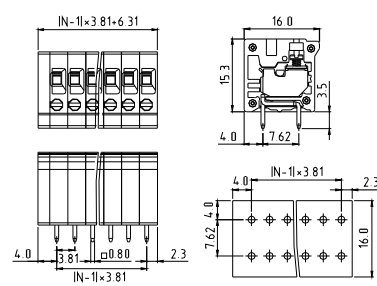


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	2.0

Screw:	M2
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR



Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 1p~24p
TRxx05510000G*(Row spacing 5.0mm)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	32A
Wire range:	0.34-4.0mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	2.4Lb-In	0.27N.m

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

TR




Pitch 5.0mm
Vertical(90D wire inlet)
Poles 1p~24p
TRxx05500000G*(Row spacing 5.0mm)
Number of poles

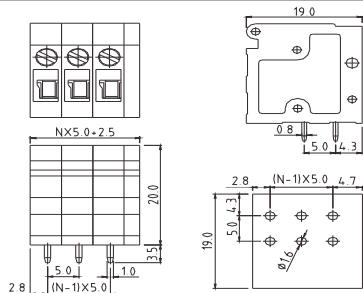


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	32A
Wire range:	0.34-4.0mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	2.4Lb-In	0.27N.m

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

TR




Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 1p~24p
TRxx0551A000G*(Row spacing 10.0mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	2.4

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR




Pitch 7.5mm
Vertical(90D wire inlet)
Poles 1p~16p
TRxx25500000G*(Row spacing 5.0mm)
Number of poles

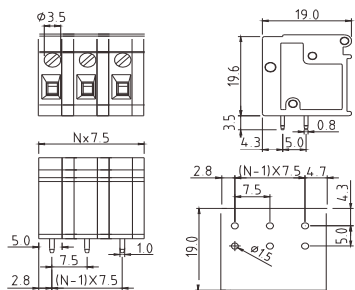


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	2.4

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR




Pitch 7.5mm
Horizontal(180D wire inlet)
Poles 1p~16p
TRxx25510000G*(Row spacing 5.0mm)
Number of poles

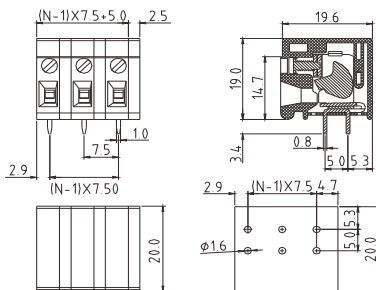


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	2.4

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR




Pitch 7.5mm
Horizontal(180D wire inlet)
Poles 1p~16p
TRxx2551A000G*(Row spacing 10.0mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	2.4

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TR



Pitch 10.0mm
Horizontal(180D wire inlet)
Poles 1p~12p
TRxx15510000G*(Row spacing 5.0mm)
Number of poles

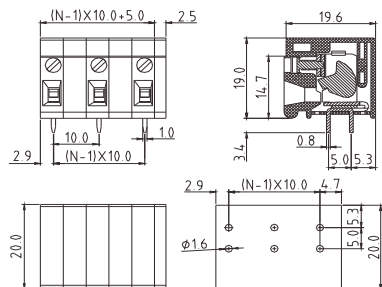


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	32A
Wire range:	0.34-4.0mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	2.4Lb-In	0.27N.m

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

TR




Pitch 10.0mm
Vertical(90D wire inlet)
Poles 1p~12p
TRxx15500000G*(Row spacing 5.0mm)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	32A
Wire range:	0.34-4.0mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	2.4Lb-In	0.27N.m

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

TR




Pitch 10.0mm
Horizontal(180D wire inlet)
Poles 1p~12p
TRxx1551A000G*(Row spacing 10.0mm)
Number of poles

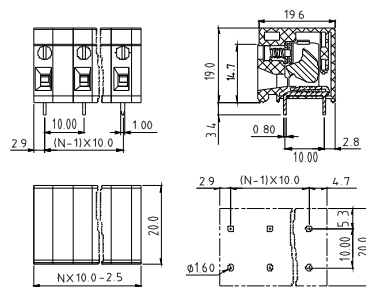


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	2.4

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TD




Pitch 5.0mm
2-Interlock
Poles 2p/3p
TDxx01610000G*
Number of poles

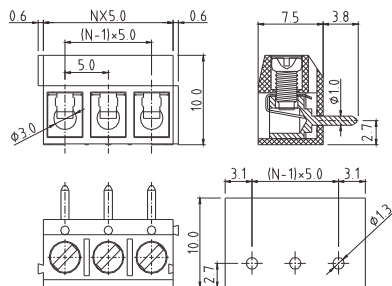


Electrical:	cULus	TUV
Voltage rating:	250V	130V
Current rating:	16A	17.5A
Wire range:	0.5-1.5mm ²	
Solid wire(AWG):	14	
Stranded wire(AWG):	16	
Torque:	2.6Lb-In	0.4N.m

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.5KV 1.25KV
Safety Approval:	

EN




Pitch 12.5mm
Solid block
Poles 2p~6p
ENxx04800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	57A
Wire range:	
Solid wire(AWG):	6-22
Stranded wire(AWG):	6-22
Torque(Lb-In) :	13

Screw:	M4
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VY




Pitch 5.0mm
HI-Temp
Poles 2p/3p
VYxx010C0000G*
Number of poles

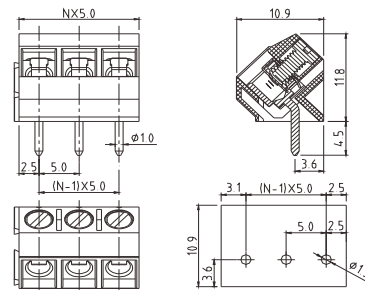


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M2.6
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VY




Pitch 5.0mm
Poles 2p/3p
VYxx01600000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M2.6
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KY




Pitch 5.0mm
Poles 2p/3p Square hole
Horizontal(180D wire inlet)
KYxx01500000G*
Number of poles

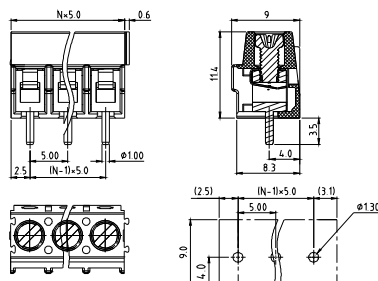


Electrical:	cULus	CQC
Voltage rating:	300V	250V
Current rating:	15A	24A
Wire range:		
Solid wire(AWG):	12-24	0.2-2.5mm ²
Stranded wire(AWG):	12-24	0.2-2.5mm ²
Torque:	3.0Lb-In	0.4N.m

Screw:	M2.6	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

KY




Pitch 5.0mm
Poles 2p/3p Square hole
Vertical(90D wire inlet)
KYxx01510000G*
Number of poles

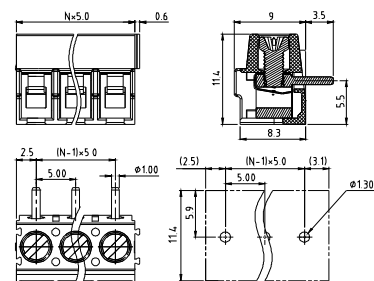


Electrical:	cULus	CQC
Voltage rating:	300V	250V
Current rating:	15A	24A
Wire range:		
Solid wire(AWG):	12-24	0.2-2.5mm ²
Stranded wire(AWG):	12-24	0.2-2.5mm ²
Torque:	3.0Lb-In	0.4N.m

Screw:	M2.6	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

KY




Pitch 5.0mm
Poles 2p/3p Round hole
Horizontal(180D wire inlet)
KYxx01520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.0

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KY




Pitch 5.0mm
Poles 2p/3p Round hole
Vertical(90D wire inlet)
KYxx01530000G*
Number of poles

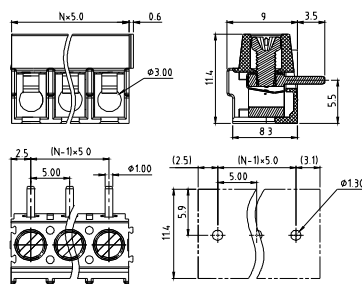


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.0

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

T3




Pitch 5.0mm
2-Interlock
Poles 2p/3p
T3xx04510000G*
Number of poles

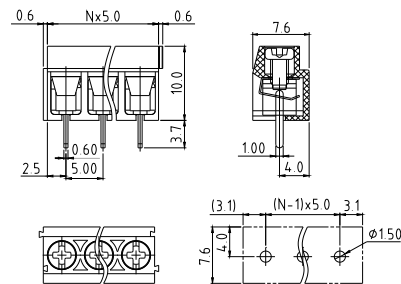


Electrical:	UL	TUV
Voltage rating:	300V	250V
Current rating:	8A	12A
Wire range:		0.2-2.5mm ²
Solid wire(AWG):	14-26	
Stranded wire(AWG):	14-26	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

T3




Pitch 5.0mm-Solid block
180D wire inlet
Poles 4p~24p
T3xx04540000G*
Number of poles

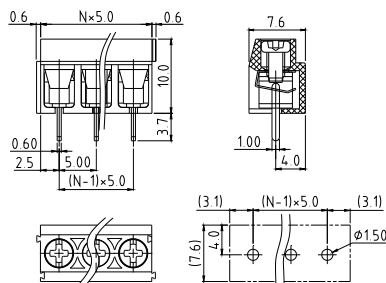


Electrical:	UL	TUV
Voltage rating:	300V	250V
Current rating:	8A	12A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	14-26	
Stranded wire(AWG):	14-26	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 2KV
Safety Approval:	

T3



Pitch 5.0mm
90D wire inlet
Poles 2p/3p
T3xx04530000G*
Number of poles




Electrical:	UL	TUV
Voltage rating:	300V	250V
Current rating:	8A	12A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	14-26	
Stranded wire(AWG):	14-26	
Torque :	3.5Lb-In	0.4N.m


Screw:	M2.5
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 2KV
Safety Approval:	

Wire Protector System

T3




Pitch 5.0mm-Solid block
90D wire inlet
Poles 4p/5p
T3xx046500B0G*
Number of poles

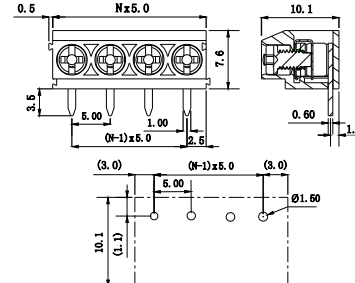


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E7




Pitch 5.0mm
Poles 2p~20p
Solid block
E7xx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TB




Pitch 5.0mm
2-Interlock
Poles 2p/3p
TBxx01610000G*
Number of poles

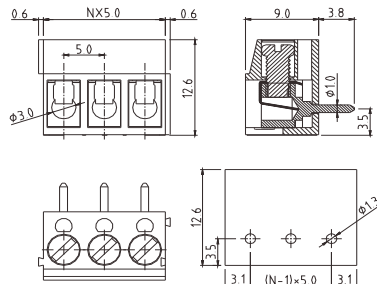


Electrical:	UL	TUV
Voltage rating:	250V	250V
Current rating:	16A	24A
Wire range:	0.5-2.5mm ²	
Solid wire(AWG):	14	
Stranded wire(AWG):		
Torque(Lb-In) :	2.6Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.5KV 2.0KV
Safety Approval:	

TB




Pitch 5.08mm
1-Interlock
Poles 2p/3p
TBxx21600000G*
Number of poles

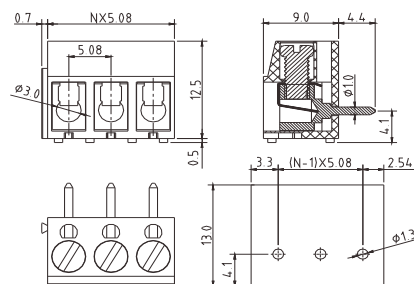


Electrical:	cULus	TUV
Voltage rating:	250V	250V
Current rating:	15A	24A
Wire range:	0.5-2.5mm ²	
Solid wire(AWG):	14-22	
Stranded wire(AWG):	14-22	
Torque(Lb-In) :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	

T9




Pitch 5.08mm
Poles 2p/3p
T9xx2180000G*
Number of poles

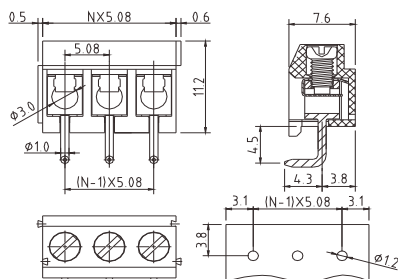


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Torque(Lb-In) :	3.2

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TC



Pitch 5.08mm
2-Interlock
Poles 2p/3p
TCxx23620000G*
Number of poles

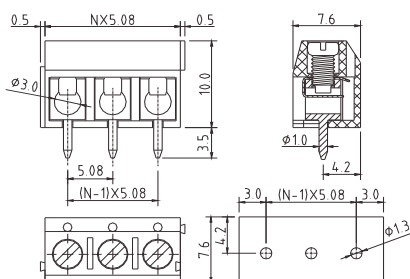


Electrical:	cULus
Voltage rating:	300V
Current rating:	16A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	2.6

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TC



Pitch 5.0mm
2-Interlock
Poles 2p/3p
TCxx03620000G*
Number of poles

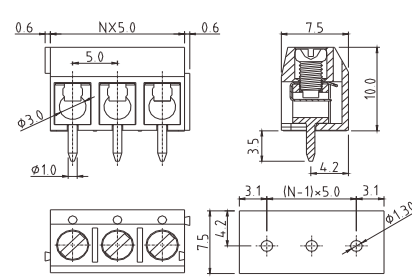


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.5 - 1.5mm ²	
Solid wire(AWG):	14-22	
Stranded wire(AWG):	14-22	
Torque :	2.6Lb-In	0.4N.m

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 2KV
Safety Approval:	cULus VDE

TC




Pitch 5.0mm
1-Interlock/Hi-Temp
Poles 2p/3p
TCxx0303C500G*
Number of poles

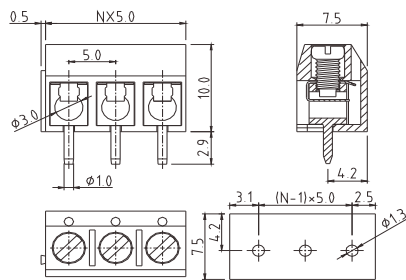


Electrical:	cULus
Voltage rating:	300V
Current rating:	16A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	2.6

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TC




Pitch 5.0mm
2-Interlock/Solid block
Poles 2p~24p
TCxx0362A500G*
Number of poles

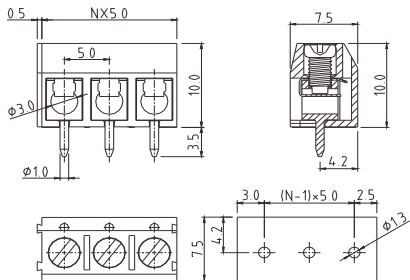


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.5 - 1.5mm ²	
Solid wire(AWG):	14-22	
Stranded wire(AWG):	14-22	
Torque :	2.6Lb-In	0.4N.m

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 2KV
Safety Approval:	cULus VDE

TA



Pitch 5.0mm
2-Interlock
Poles 2p/3p
TAxx01610000G*
Number of poles

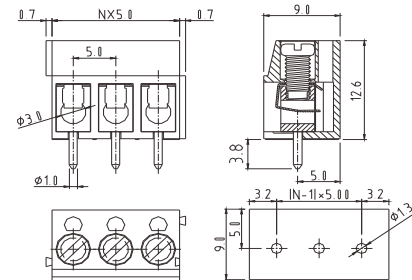


Electrical:	UL	VDE
Voltage rating:	250V	250V
Current rating:	16A	16A
Wire range:	0.5 - 2.5mm ²	
Solid wire(AWG):	14-26	
Stranded wire(AWG):	14-26	
Torque :	2.6Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.5KV 2KV
Safety Approval:	UL VDE

TA




Pitch 5.08mm
1-Interlock
Poles 2p/3p
TAxx41630000G*
Number of poles

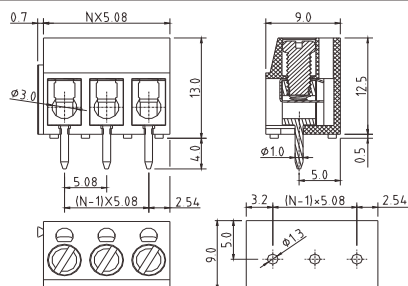


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TA




Pitch 7.5mm
1-Interlock
Poles 2p/3p
TAxx2161BB00G*
Number of poles

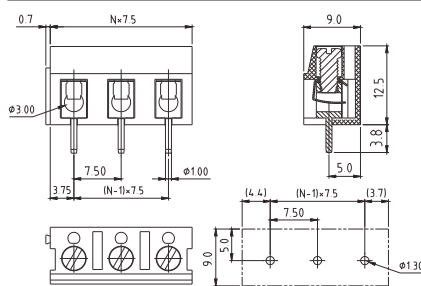


Electrical:	UL
Voltage rating:	250V
Current rating:	16A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.5KV
Safety Approval:	

VA



Pitch 5.0mm
1-Interlock
Poles 2p/3p
VAxx01600000G*
Number of poles

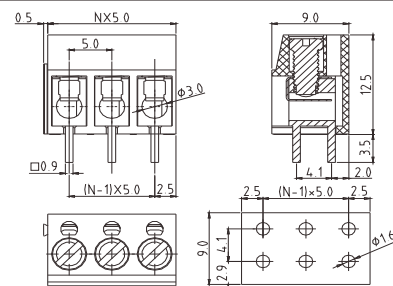


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VA




Pitch 7.5mm
1-Interlock
Poles 2p/3p
VAxx21600000G*
Number of poles

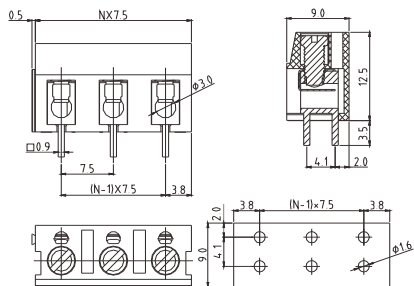


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

T4




Pitch 5.0mm
Solid block
Poles 2p~24p
T4xx04500000G*
Number of poles

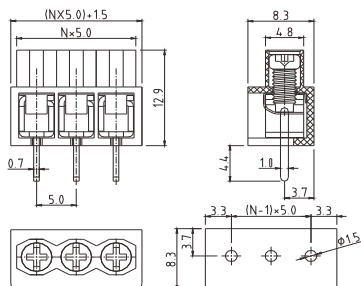


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	17.5A
Wire range:		0.75 - 4.0mm ²
Solid wire(AWG):	12-20	
Stranded wire(AWG):	12-20	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

T4




Pitch 5.0mm-Solid block
Connector through type
Poles 2p~24p
T4xx04520000G*
Number of poles

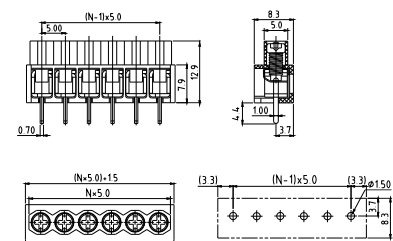


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-20
Stranded wire(AWG):	12-20
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

T4




Pitch 7.5mm
Solid block
Poles 2p~16p
T4xx24500000G*
Number of poles

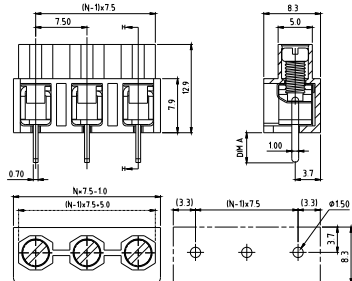


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-20
Stranded wire(AWG):	12-20
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KH



Pitch 6.35mm
Horizontal(180D wire inlet)
Poles 1p~16p
KHxx05510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	15-16mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KH



Pitch 6.35mm
Vertical(90D wire inlet)
Poles 1p~16p
KHxx05500000G*
Number of poles

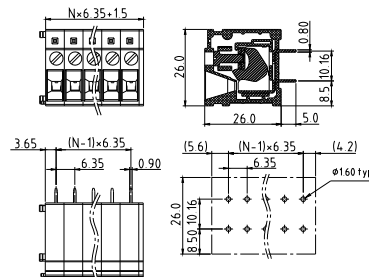


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	15-16mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KH




Pitch 7.62mm
Horizontal(180D wire inlet)
Poles 1p~16p
KHxx15510000G*
Number of poles

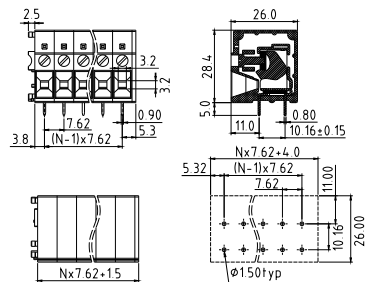


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	15-16mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KH




Pitch 7.62mm
Vertical(90D wire inlet)
Poles 1p~16p
KHxx15500000G*
Number of poles

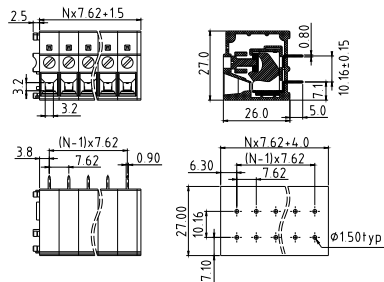


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	15-16mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TM



Poles 3p/4p/5p
TMxx19000000G*
Number of poles

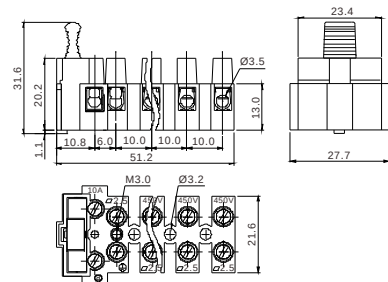

Electrical:	cULus
Voltage rating:	400V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-22
Stranded wire(AWG):	14-22
Torque :	3.5Lb-In



Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.8KV
Safety Approval:	cULus

#600V (when mounted on a suitably insulated mounting surface)

Rising Clamp System




B

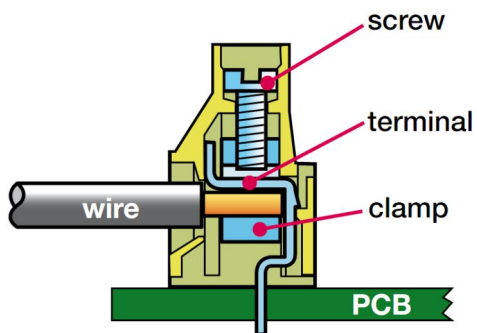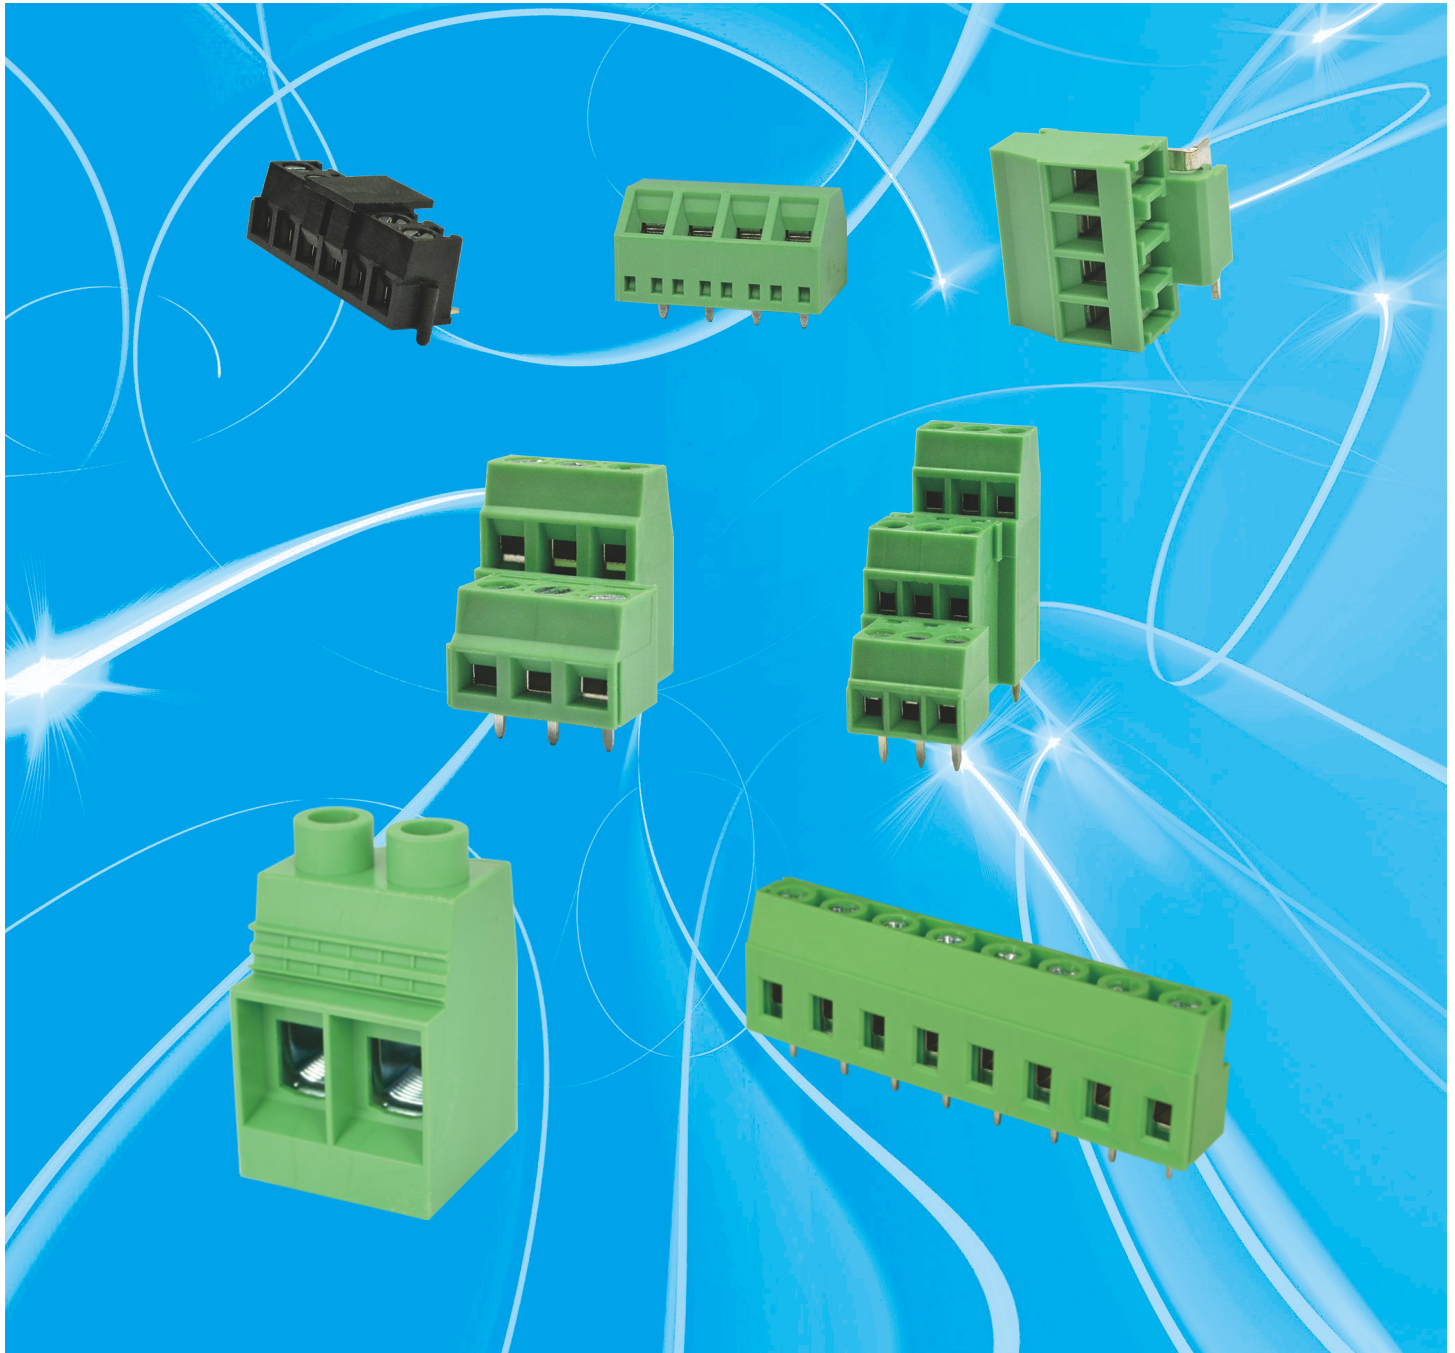


Pitch: 2.54, 3.5, 3.81, 4.5, 5.0, 5.08, 6.35, 7.5, 7.62, 9.52, 10.16, 12.7, 15.0, 15.24, 17.5, 19.0
Rated Voltage Range(cULus): 150V-1000V
Rated Current Range(cULus): 6A-160A

VN




Pitch 2.54mm
Solid block
Poles 2p~24p
VNxxA1500000G*
Number of poles

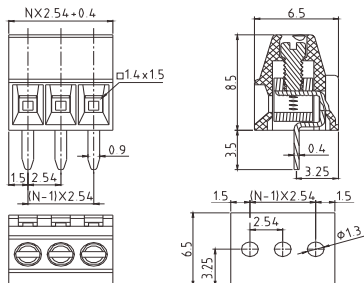


Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	18-30
Stranded wire(AWG):	18-30
Torque(Lb-In) :	1.3

Screw:	M1.6
Wire strip length:	4-5mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

ER




Pitch 3.5mm
90D wire inlet
Poles 2p/3p
ERxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ER




Pitch 3.5mm
180D wire inlet
Poles 2p/3p
ERxx01500000G*
Number of poles

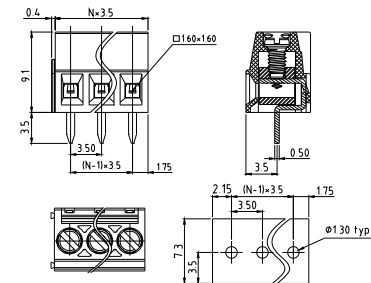


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YO




Pitch 3.5mm
1st-Level/Solid block
Poles 2p~24p
YOxx01500000G*
Number of poles

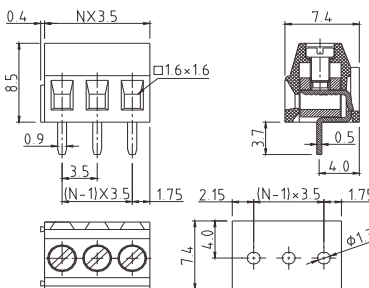


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	10A	12A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-24	
Stranded wire(AWG):	16-24	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 1.5KV
Safety Approval:	cULus TUV

YO




Pitch 3.81mm
1st-Level/Solid block
Poles 2p~24p
YOxx21500000G*
Number of poles

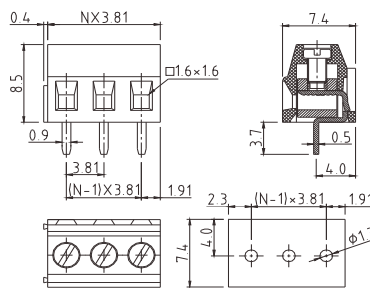


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	10A	12A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-24	
Stranded wire(AWG):	16-24	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV 1.5KV
Safety Approval:	cULus TUV

TV




Pitch 3.5mm
Solid bolck
Poles 2p~24p
TVxx11500000G*
Number of poles

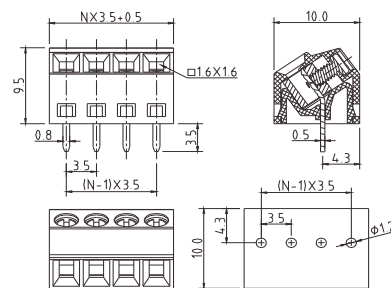


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TV




Pitch 3.81mm
Solid block
Poles 2p~24p
TVxx31500000G*
Number of poles

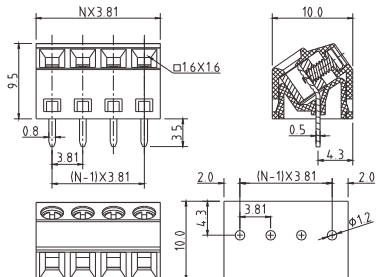


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TV




Pitch 5.0mm
Solid block
Poles 2p~24p
TVxx51500000G*
Number of poles

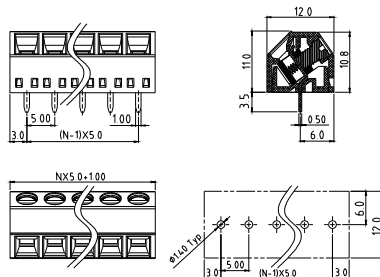


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Torque(Lb-In):	3.5

Screw:	M3.0
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YP




Pitch 3.5mm
2nd-Level/Solid block
Poles 2p~24p(Insert hole:1.6x1.6mm)
YPxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YP




Pitch 3.81mm
2nd-Level/Solid block
Poles 2p~24p(Insert hole:1.6x1.6mm)
YPxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YP




Pitch 3.81mm
High type(2nd-Level/Solid block)
Poles 2p~24p(Insert hole:2.1x2.2mm)
YPxx2150A000G*
Number of poles

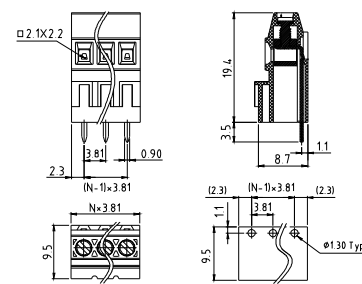


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VQ




Pitch 3.5mm
Dip solder/Solid block
Poles 2p~24p
VQxx11500000G*
Number of poles

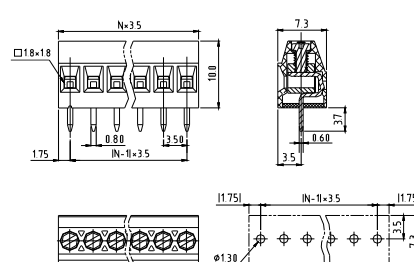


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VQ




Pitch 3.81mm
Dip solder/Solid block
Poles 2p~24p
VQxx3150000G*
Number of poles

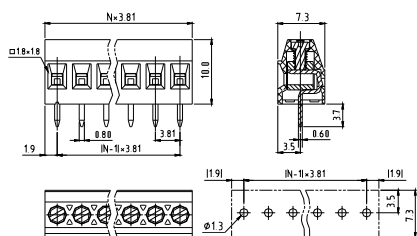


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VQ




Pitch 3.5mm
Press fit/Solid block
Poles 2p~24p
VQxx11510000G*
Number of poles

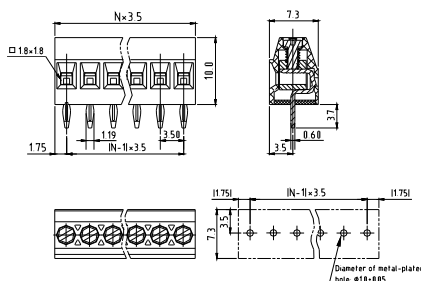


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VQ




Pitch 3.81mm
Press fit/Solid block
Poles 2p~24p
VQxx31510000G*
Number of poles

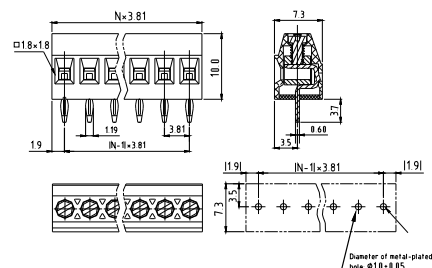


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ




Pitch 3.5mm-L
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx01500000G*
Number of poles

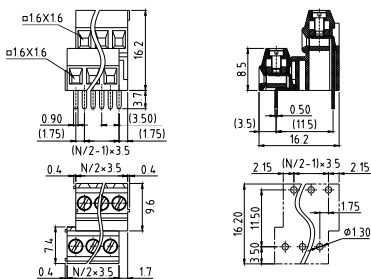


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ




Pitch 3.5mm-R
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx21500000G*
Number of poles

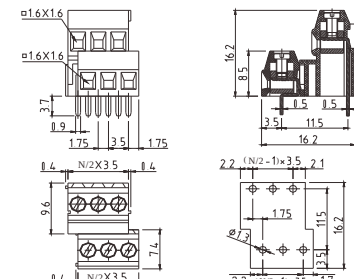


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ




Pitch 3.81mm-L
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx41500000G*
Number of poles

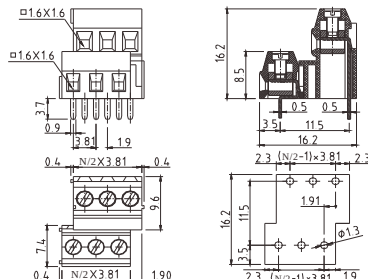


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YQ



Pitch 3.81mm-L
Double level(ED+YP) High type
Poles 2*2p~2*24p(Insert hole:2.1x2.2mm)
YQxx4150A000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YQ




Pitch 3.81mm-R
Double level(YO+YP)
Poles 2*2p~2*24p(Insert hole:1.6x1.6mm)
YQxx6150000G*
Number of poles

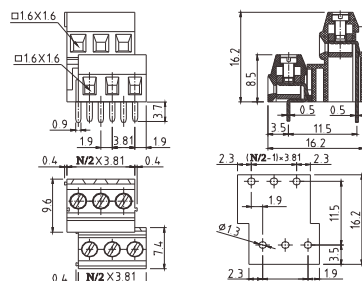


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YQ




Pitch 3.81mm-R
Double level(ED+YP) High type
Poles 2*2p~2*24p(Insert hole:2.1x2.2mm)
YQxx6150A000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YA




Pitch 3.81mm
Solid block
Poles 15p(5*3)Only
YA152150000G*
Number of poles

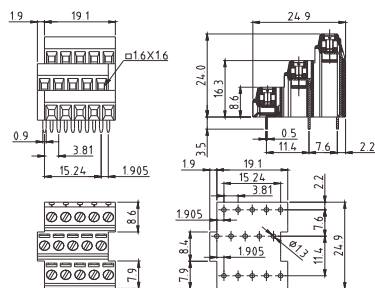


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	(cULus) pending

YA




Pitch 3.5mm
Poles 3*2p/3*3p
YAx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

YA



Pitch 3.81mm
Poles 3*2p/3*3p
YAx21510000G*
Number of poles

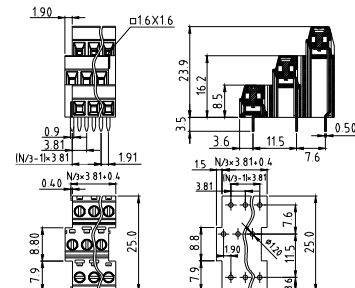


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

TZ



Pitch 3.5mm
Poles 2p~16p
SMT type(W/O pillar)
TZxx2103B000G*
Number of poles

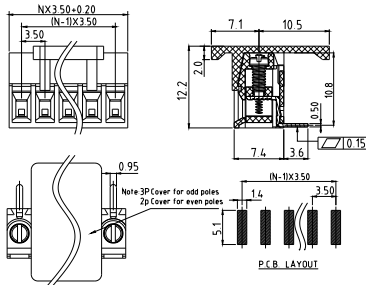


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TZ



Pitch 3.5mm
Poles 2p~16p
SMT type(With pillar)
TZxx2101B000G*
Number of poles

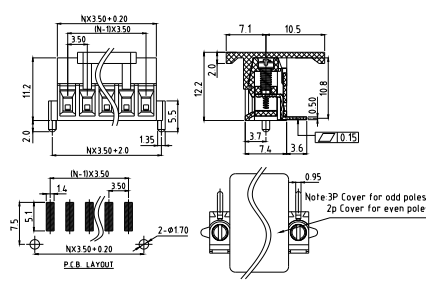


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	4-5mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TZ




Pitch 5.0mm
Poles 2p~12p
SMT type(With pillar)
TZxx0101B000G*
Number of poles

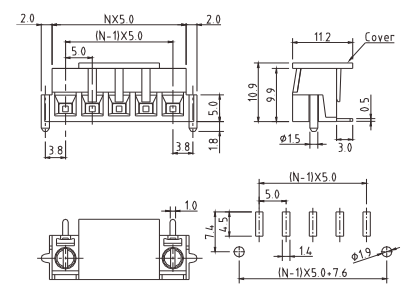


Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ED




Pitch 3.81mm
Solid block
Poles 2p~24p
EDxx31500000G*
Number of poles

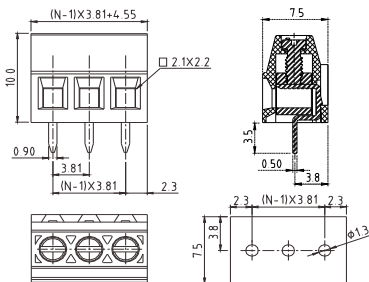


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	2.17

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

K6




Pitch 4.5mm
Poles 2p~24p
K6xx01500000G*
Number of poles

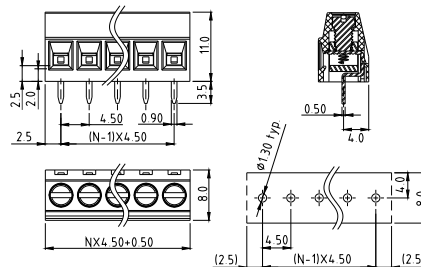


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Torque(Lb-In) :	2.7

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ES



Pitch 5.0mm
Poles 2p/3p
ESxx01500000G*
Number of poles

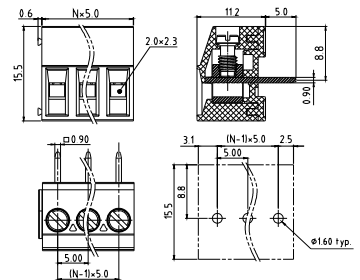


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

E6




Pitch 5.0mm-Right
Poles 2p
E60201500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6



Pitch 5.0mm-Left
Poles 2p
E60201500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6



Pitch 5.0mm-Right
Poles 3p
E60301500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Left
Poles 3p
E60301500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Right
Poles 4p
E60401500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E6




Pitch 5.0mm-Left
Poles 4p
E60401500000G*
Number of poles

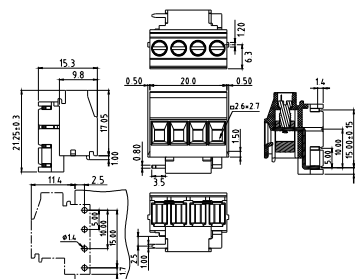


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.0

Screw:	M3.0
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EQ




Pitch 5.0mm-90D
Solid block
Poles 2p~24p
EQxx0580000G*
Number of poles

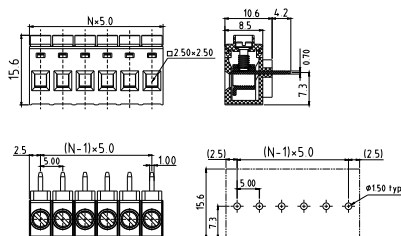


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EQ




Pitch 5.0mm-180D
Solid block
Poles 2~24p
EQxx05810000G*
Number of poles

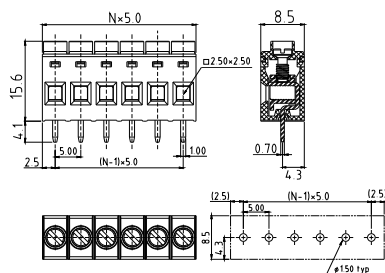


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TO




Pitch 5.0mm
Poles 2p/3p
TOxx01520000G*
Number of poles

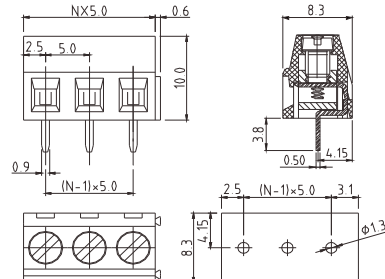


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	10A
Wire range:		0.5 - 1.5mm ²
Solid wire(AWG):	16-26	
Stranded wire(AWG):	16-26	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

TO




Pitch 5.0mm
Solid block
Poles 4p~24p
TOxx01510000G*
Number of poles

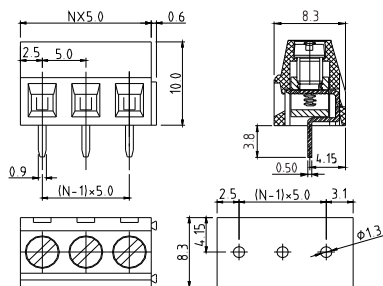


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V3




Pitch 5.0mm-Left
Poles 3p only
V3030180000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

V3




Pitch 5.0mm-Right
Poles 3p only
V30301810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

T2




Pitch 5.0mm
Poles 2p/3p
T2xx01500000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

T2




Pitch 5.0mm
Solid block
Poles 4p~24p
T2xx01510000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

T2




Pitch 5.08mm
Solid block
Poles 2p~24p
T2xx21510000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YD




Pitch 5.0mm
1st-level
Poles 2p~24p
YDxx01500000G*
Number of poles




Electrical:	UL	TUV
Voltage rating:	300V	250V/400V/630V
Current rating:	10A	24A
Wire range:		0.2-2.5mm ²
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	M2.5
Wire strip length:	6-7mm	6-7mm
Withstanding Voltage:	1.6KV	3.1KV
Safety Approval:		

YD




Pitch 5.08mm
1st-level
Poles 2p~24p
YDxx21500000G*
Number of poles




Electrical:	UL	TUV
Voltage rating:	300V	250V/400V/630V
Current rating:	10A	24A
Wire range:		0.2-2.5mm ²
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	M2.5
Wire strip length:	6-7mm	6-7mm
Withstanding Voltage:	1.6KV	3.1KV
Safety Approval:		

YF




Pitch 5.0mm
3rd-level
Poles 2p/3p
YFxx01500000G*
Number of poles

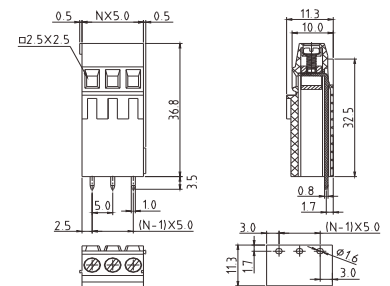


Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YF



Pitch 5.08mm
3rd-level
Poles 2p/3p
YFxx21500000G*
Number of poles

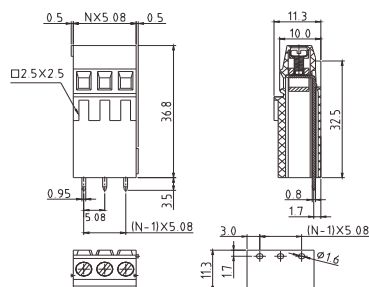


Electrical:	UL
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE



Pitch 5.0mm
2nd-level
Poles 2p/3p
YExx01500000G*
Number of poles

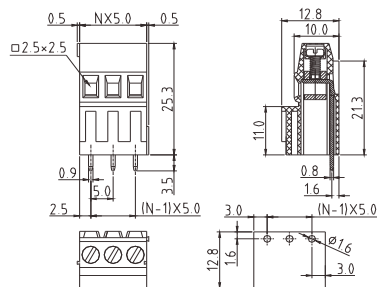


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE



Pitch 5.0mm
2nd-level Solid block
Poles 4p~24p
YExx01510000G*
Number of poles

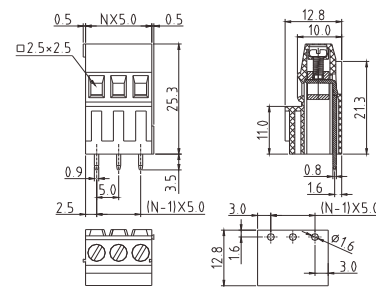


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE




Pitch 5.08mm
2nd-level
Poles 2p/3p
YExx21500000G*
Number of poles

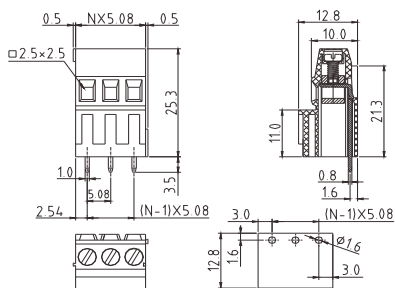


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YE




Pitch 5.08mm
2nd-level Solid block
Poles 4p~24p
YExx21510000G*
Number of poles

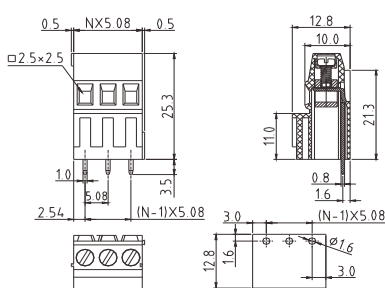


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TG



Pitch 5.0mm
Long interlock
Poles 2p/3p
TGxx0160B000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	15A	10A
Wire range:	0.34-4.0mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

TG




Pitch 5.0mm
Long interlock(Solid block)
Poles 4p~24p
TGxx0160C000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TG




Pitch 5.08mm
Long interlock
Poles 2p/3p
TGxx5160B000G*
Number of poles

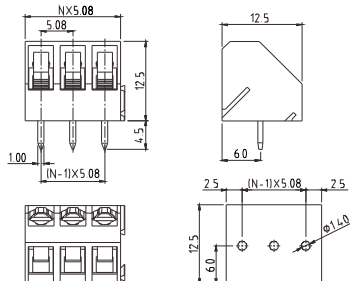


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	15A	10A
Wire range:		0.34-4.0mm ²
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

YR




Pitch 5.0mm
Poles 2p~24p
YRxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YR



Pitch 5.08mm
Poles 2p~24p
YRxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YG



Pitch 5.0mm
Poles 2p~24p
YGxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YG



Pitch 5.08mm
Poles 2p~24p
YGxx21510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YS



Pitch 5.0mm
Double level
Poles 4p(2*2),6p(2*3)
YSxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3.0
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YS




Pitch 5.08mm
Double level
Poles 4p(2*2),6p(2*3)
YSxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3.0
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL




Pitch 5.0mm-L
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL



Pitch 5.0mm-R
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx21500000G*
Number of poles

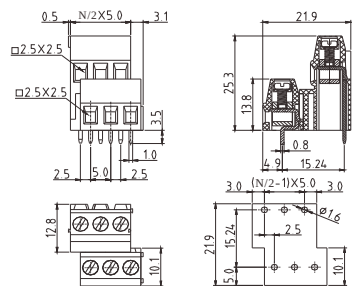


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL



Pitch 5.08mm-L
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx41500000G*
Number of poles

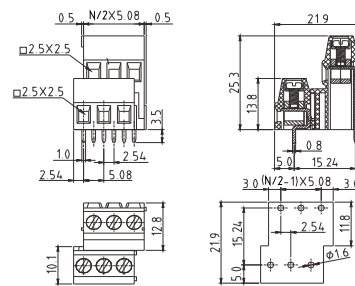


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL



Pitch 5.08mm-R
Double level(YD+YE)
Poles 4p(2*2),6p(2*3)
YLxx61500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YL



Pitch 5.08mm-R
Double level(Solid block)
Poles 4P(2*2),6P(2*3)
YLxx61510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	5.0

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

YM



Pitch 5.0mm-L
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YM




Pitch 5.0mm-R
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx21500000G*
Number of poles

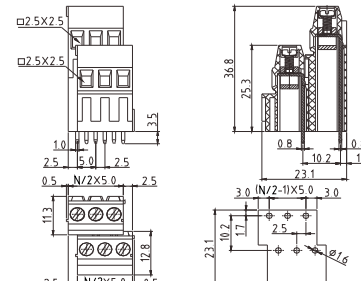


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YM



Pitch 5.08mm-L
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx41500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YM



Pitch 5.08mm-R
Double level(YE+YF)
Poles 4p(2*2),6p(2*3)
YMxx61500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EB




Pitch 5.0mm-Interlace
Poles 2*2p/2*3p
EBxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EB



Pitch 5.0mm-Parallel
Poles 2*2p/2*3p
EBxx01530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EB




Pitch 5.08mm-Interlace
Poles 2*2p/2*3p
EBxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EB



Pitch 5.08mm-Parallel
Poles 2*2p/2*3p
EBxx21530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YN



Pitch 5.0mm
Triple level(YD+YE+YF)
Poles 6p(3*2),9p(3*3)
YNxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YN



Pitch 5.08mm
Triple level(YD+YE+YF)
Poles 6p(3*2),9p(3*3)
YNxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YH




Pitch 5.0mm
Poles 3*2p/3*3p
YHxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YH



Pitch 5.08mm
Poles 3*2p/3*3p
YHxx21510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YT



Pitch 5.0mm
Poles 4*2p/4*3p
YTxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YT



Pitch 5.08mm
Poles 4*2p/4*3p
YTxx21500000G*
Number of poles

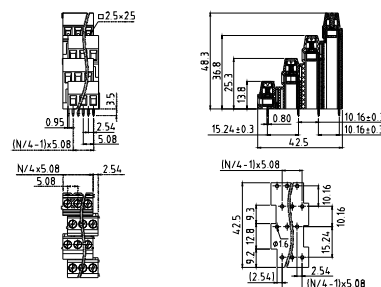


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YI



Pitch 5.0mm
Poles 4*2p/4*3p
YIxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YI




Pitch 5.08mm
Poles 4*2p/4*3p
YIxx21510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

VI




Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 2p/3p
VIxx01520000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.0KV
Safety Approval:		

VI




Pitch 5.0mm
Vertical(90D wire inlet)
Poles 2p/3p
VIxx01500000G*
Number of poles

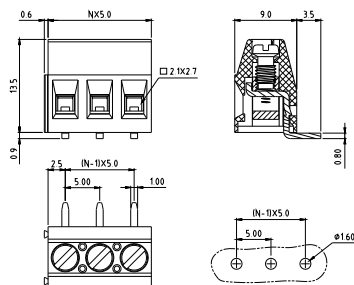


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	cULus

VI




Pitch 5.08mm
Horizontal(180D wire inlet)
Poles 2p/3p
VIxx21520000G*
Number of poles

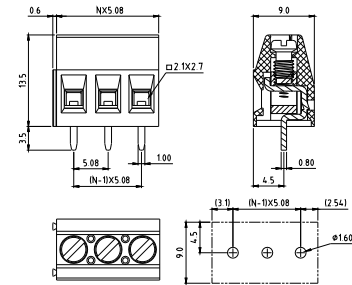


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	cULus

VI




Pitch 5.08mm
Vertical(90D wire inlet)
Poles 2p/3p
VIxx21500000G*
Number of poles

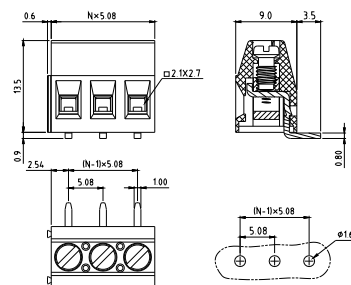


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	cULus

VI




Pitch 5.08mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~24p
VIxx21530000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	cULus

VI




Pitch 5.08mm
Solid block
Vertical(90D wire inlet)
Poles 4p~24p
VIxx21530000G*
Number of poles

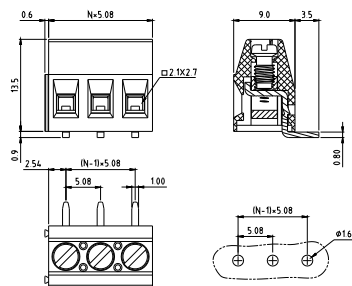


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	cULus

VI




Pitch 7.5mm
Horizontal(180D wire inlet)
Poles 2p/3p
VIxx41520000G*
Number of poles

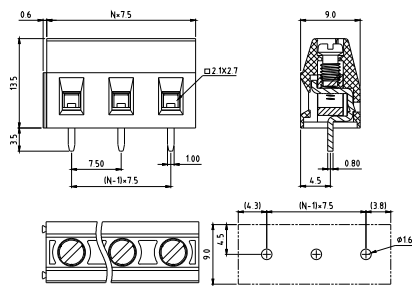


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus

VI



Pitch 7.5mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx4150000G*
Number of poles

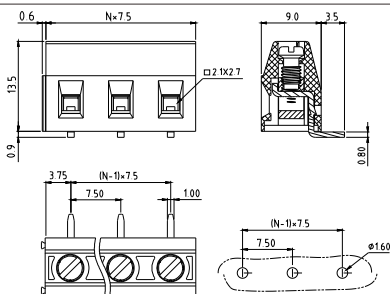


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	16A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Torque:	3.5-5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VJ




Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx01520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VJ




Pitch 5.0mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~24p
VJxx01550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VJ




Pitch 5.0mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx01500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VJ




Pitch 5.0mm
Solid block
Vertical(90D wire inlet)
Poles 4p~24p
VJxx01530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VJ




Pitch 5.08mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx21520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VJ




Pitch 5.08mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~24p
VJxx21550000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	 

VJ




Pitch 5.08mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx21530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	 

VJ



Pitch 5.08mm
Solid block
Vertical(90D wire inlet)
Poles 4p~24p
VJxx21530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	 

VJ




Pitch 7.5mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx41520000G*
Number of poles

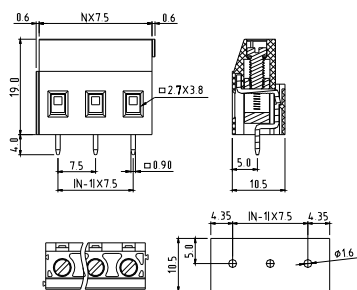


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	 

VJ




Pitch 7.5mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~16p
VJxx41500000G*
Number of poles

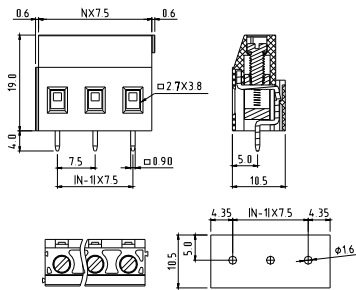


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	 

VJ




Pitch 7.5mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx41500000G*
Number of poles

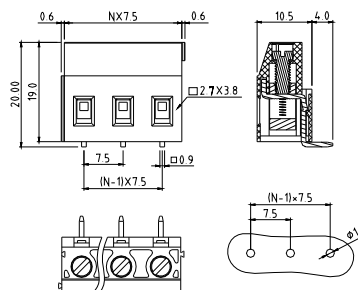


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	 

VJ




Pitch 7.5mm
Solid block
Vertical(90D wire inlet)
Poles 4p~16p
VJxx41530000G*
Number of poles

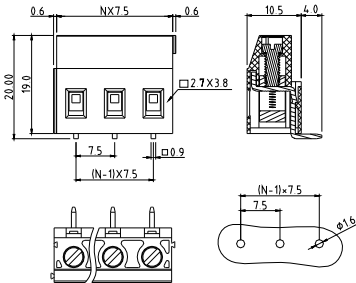


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

VJ




Pitch 7.62mm
Horizontal(180D wire inlet)
Poles 2p/3p
VJxx61520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

VJ




Pitch 7.62mm
Solid block
Horizontal(180D wire inlet)
Poles 4p~16p
VJxx61550000G*
Number of poles

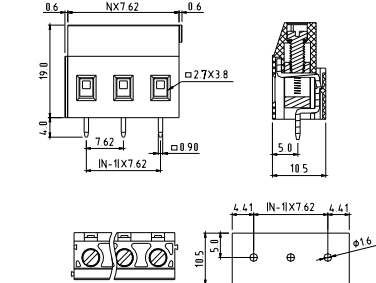


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

VJ




Pitch 7.62mm
Vertical(90D wire inlet)
Poles 2p/3p
VJxx61500000G*
Number of poles

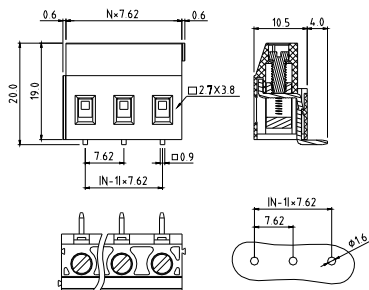


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

VJ




Pitch 7.62mm
Solid block
Vertical(90D wire inlet)
Poles 4p~16p
VJxx61530000G*
Number of poles

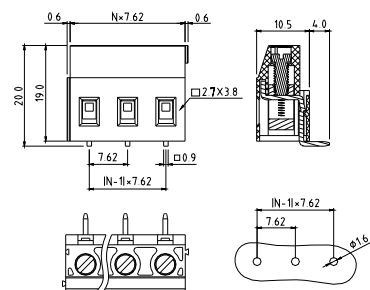


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	20A	24A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	3.5Lb-In	0.5N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

VJ




Pitch 7.62mm(180D wire inlet)
Low profile type(W/O cover)
Poles 2p~16p
VJxx6055TxxxG*
Number of poles

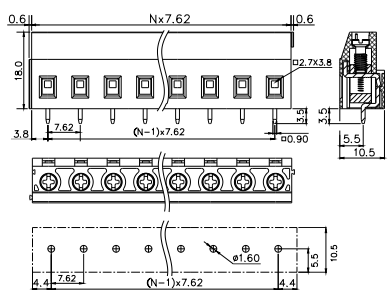


Electrical:	cULus	
Voltage rating:	300V	
Current rating:	20A	
Wire range:		
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque (Lb-In):	3.5	

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TI




Pitch 5.0mm
Poles 2p/3p
TIxx01500000G*
Number of poles

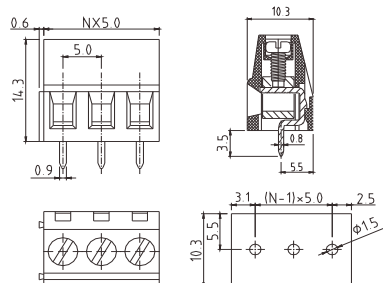


Electrical:	CQC	cULus	VDE
Voltage rating:	250V	300V	250V
Current rating:	24A	16A	10A
Wire range:	0.2-2.5mm ²	0.34-4.0mm ²	
Solid wire(AWG):		12-22	
Stranded wire(AWG):		12-22	
Torque :	0.4N.m	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	2.0KV 1.6KV 2KV
Safety Approval:	CQC cULus VDE

TI




Pitch 5.0mm
Solid block
Poles 4p~24p
TIxx015A0000G*
Number of poles

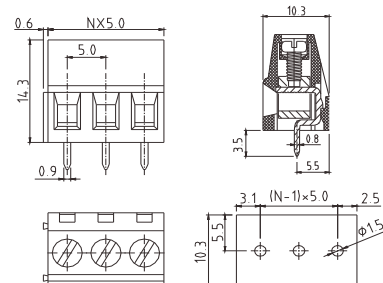


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TI




Pitch 7.5mm
Poles 2p/3p
TIxx21500000G*
Number of poles

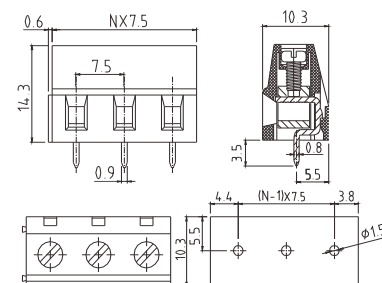


Electrical:	CQC	UL	VDE
Voltage rating:	450V	300V	450V
Current rating:	24A	16A	10A
Wire range:	0.2-2.5mm ²	0.34-4.0mm ²	
Solid wire(AWG):		12-22	
Stranded wire(AWG):		12-22	
Torque :	0.4N.m	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	2.5KV 1.6KV 2.5KV
Safety Approval:	CQC UL VDE

TI



Pitch 7.62mm
Solid block
Poles 2p~16p
TIxx415A0000G*
Number of poles

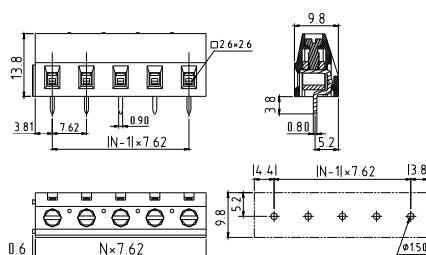


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M2.5
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EF




Pitch 5.0mm
Poles 2p~24p
EFxx0150xxxxG*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.3~5.2

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EK



Pitch 5.08mm
Poles 2p/3p
EKxx21500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	15A	17.5A
Wire range:		0.2-2.5mm ²
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque:	4.3 Lb-In	0.57N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.0KV
Safety Approval:	cULus

TU




Pitch 5.08mm
Poles 2p/3p
TUxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

YC




Pitch 5.08mm
Poles 2p/3p
YCxx21500000G*
Number of poles

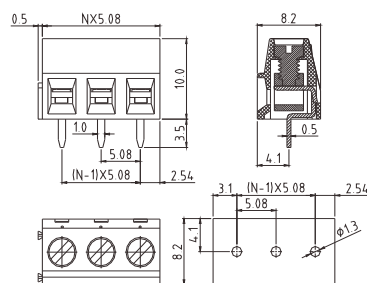


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VT



Pitch 5.08mm
Poles 1p~12p
VTxx21800000G*
Number of poles

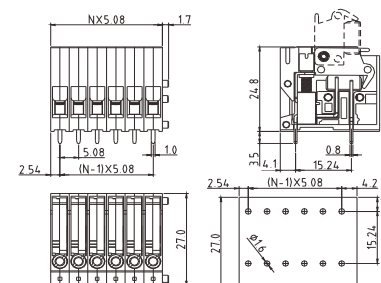


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

YB




Pitch 5.08mm
Solid block
Poles 6p(3*2),9p(3*3)
YBxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VV




Pitch 6.35mm
Double level
Poles 4p(2*2),6p(2*3)
VVxx01500000G*
Number of poles

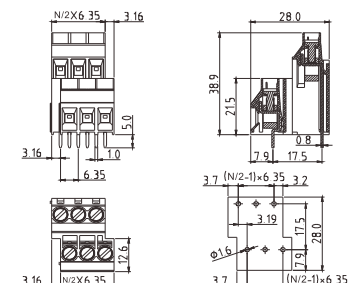


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In) :	5.2

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VV




Pitch 9.52mm
Double level
Poles 4p(2*2),6p(2*3)
VVxx21500000G*
Number of poles

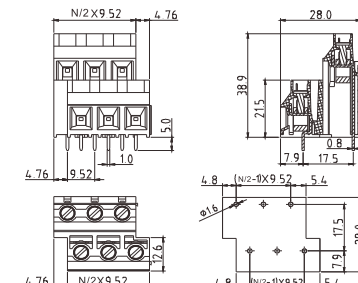


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In) :	5.2

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

T7




Pitch 6.35mm
Poles 2p/3p
T7xx03500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	

T7




Pitch 6.35mm-45D
Poles 2p/3p
T7xx03510000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	2.5KV
Safety Approval:	

T7-New type



Pitch 7.62mm
Poles 2p~16p
T7xx465A0000G*
Number of poles

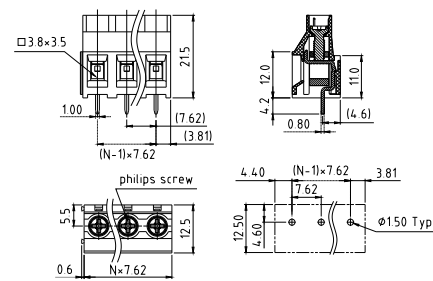


Electrical:	cULus
Voltage rating:	300V
Current rating:	32A
Wire range:	
Solid wire:	10-30AWG
Stranded wire:	10-30AWG

Torque :	8.9Lb-In
Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	() pending

T7




Pitch 7.62mm
Poles 2p/3p
T7xx43500000G*
Number of poles




Electrical:	cULus	TUV	VDE
Voltage rating:	300V	750V	750V
Current rating:	30A	41A	41A
Wire range:	0.20-6mm²		
Solid wire:	10-24AWG	0.2-6mm²	
Stranded wire:	10-24AWG	0.2-6mm²	
Flexible wire:	0.2-4mm²		
Torque :	8.9Lb-In	0.85N.m	0.8N.m

Screw:	M3.5		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	3KV	3KV
Safety Approval:			

T7




Pitch 9.52mm
Poles 2p/3p
T7xx23500000G*
Number of poles

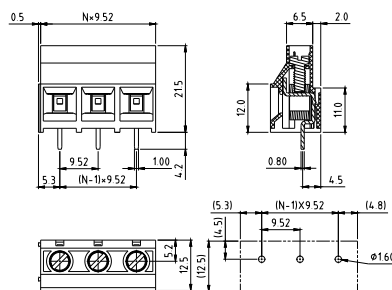


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	

T7




Pitch 9.52mm-45D
Poles 2p/3p
T7xx23510000G*
Number of poles

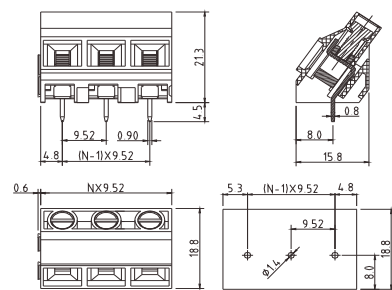


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	30A	41A
Wire range:	0.20-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque :	8.9Lb-In	0.85N.m

Screw:	M3.5
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	3KV
Safety Approval:	




Pitch 6.35mm-Interlace
Poles 2p~16p
KPxx01500000G*(Without cover)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	600V
Current rating:	30A	41A
Wire range:	0.2-6.0mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque:	5.3-7Lb-In	0.6N.m

Screw:	M3.5
Wire strip length:	8-9mm
Withstanding Voltage:	2.2KV 3.0KV
Safety Approval:	 




Pitch 6.35mm
Back single row
Poles 1p~16p
KPxx01510000G*(Without cover)
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	30A	41A
Wire range:	0.2-6.0mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque:	5.3-7Lb-In	0.6N.m

Screw:	M3.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	 



Pitch 6.35mm
Front single row
Poles 1p~16p
KPxx01520000G*(Without cover)
Number of poles

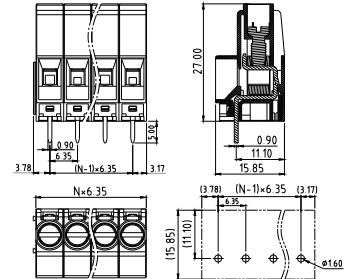


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	30A	41A
Wire range:	0.2-6.0mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Torque:	5.3-7Lb-In	0.6N.m

Screw:	M3.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	 



Pitch 10.16mm
Double interlace tail
Poles 2p~12p
KPxx21500000G*(Without cover)
Number of poles

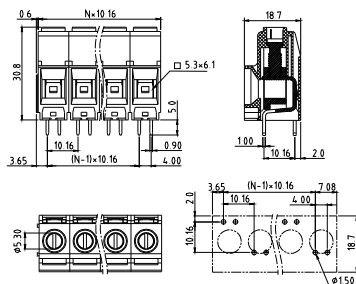


Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating:	65A	76A
Wire range(Rigid wire) :	0.5-16mm ²	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	12.2LB-In	1.38N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV 3.5KV
Safety Approval:	 




Pitch 10.16mm
Back single row
Poles 2p~12p
KPxx21510000G*(Without cover)
Number of poles

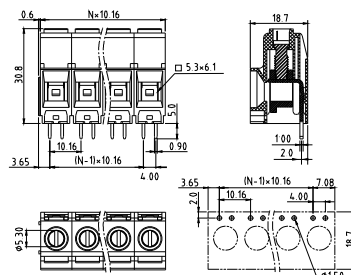


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	65A	76A
Wire range(Rigid wire) :	0.5-16mm ²	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	12.2Lb-In	1.38N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	 




Pitch 10.16mm
Front single row
Poles 2p~12p
KPxx21520000G*(Without cover)
Number of poles

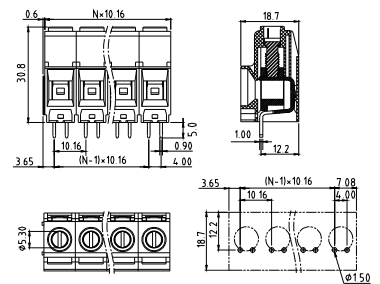


Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating:	65A	76A
Wire range(Rigid wire) :	0.5-16mm ²	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	12.2Lb-In	1.38N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	 

K7




Pitch 7.5mm(Left)
Poles 3p
K70303810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus)pending

K7




Pitch 7.5mm(Right)
Poles 3p
K70303800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.3
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus)pending

KO




Pitch 9.52mm
Interlace tail
Poles 2p/3p
KOxx21510000G*
Number of poles

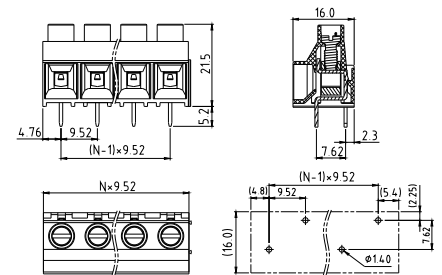


Electrical:	cULus
Voltage rating:	600V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	5.5
Screw:	M3.5
Wire strip length:	7-8mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus)

KO



Pitch 9.52mm
Back single row
Poles 2p/3p
KOxx21500000G*
Number of poles

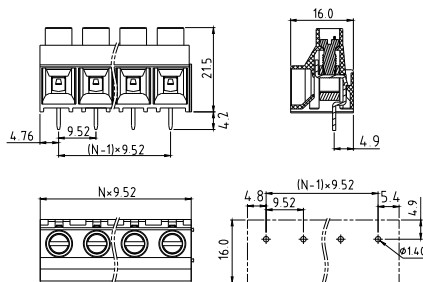


Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	5.5
Screw:	M3.5
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

VP



Pitch 10.16mm
Single tail type
Poles 2p/3p
VPxx65840000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m
Screw:	M4.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:	(cULus)	(VDE)

VP



Pitch 10.16mm
Double parallel tail type
Poles 2p/3p
VPxx65850000G* A type(Solder pitch 5.08mm)
Number of poles

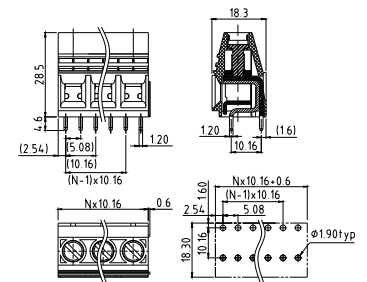


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m
Screw:	M4.5	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:	(cULus)	(VDE)

VP



Pitch 10.16mm
Double parallel tail type
Poles 2p/3p
VPxx65880000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	cULus VDE

VP



Pitch 10.16mm
Double interlace tail type
Poles 2p/3p
VPxx65870000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	65A	76A
Wire range:		
Solid wire:	6-20AWG	0.5-16mm ²
Stranded wire:	6-20AWG	0.5-16mm ²
Torque :	19Lb-In	1.8N.m

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 3KV
Safety Approval:	cULus VDE

VP



Pitch 12.7mm
Single tail type
Poles 2p/3p
VPxx85540000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

VP



Pitch 12.7mm
Double parallel tail type
Poles 2p/3p
VPxx85550000G* A type(Solder pitch 5.08mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VP



Pitch 12.7mm
Double parallel tail type
Poles 2p/3p
VPxx85580000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VP




Pitch 12.7mm
Double interlace tail type
Poles 2p/3p
VPxx85570000G* B type(Solder pitch 4.0mm)
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque:	19Lb-In

Screw:	M4.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KQ




Pitch 10.16mm
Poles 2p/3p
KQxx62000000G* A type
Number of poles

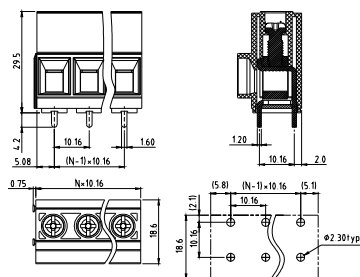


Electrical:	cULus
Voltage rating:	300V
Current rating:	64A
Wire range:	
Solid wire(AWG):	6-22
Stranded wire(AWG):	6-22
Torque(Lb-In):	19

Screw:	M4.5
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EI




Pitch 15.0mm
Solid block
Poles 2p~10p
EIxxC1530000G*
Number of poles

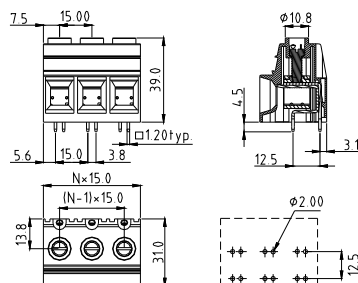


Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating:	125A	125A
Wire range:	0.5-35mm ²	
Solid wire(AWG):	2-20	
Stranded wire(AWG):	2-20	
Torque:	36.5Lb-In	4.2N.m

Screw:	M5
Wire strip length:	16-19mm
Withstanding Voltage:	2.2KV
Safety Approval:	

EI




Pitch 15.0mm-W/F
Solid block
Poles 2p~10p
EIxxC1531000G*
Number of poles

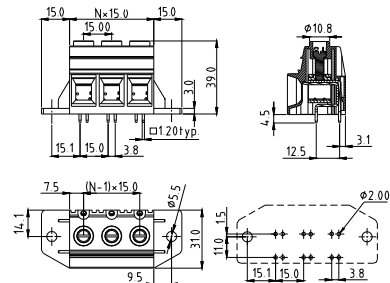


Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating:	125A	125A
Wire range:	0.5-35mm ²	
Solid wire(AWG):	2-20	
Stranded wire(AWG):	2-20	
Torque:	36.5Lb-In	4.2N.m

Screw:	M5
Wire strip length:	16-19mm
Withstanding Voltage:	2.2KV
Safety Approval:	

K9




Pitch 15.0mm
Poles 1p~10p
K9xxC1520000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	127A
Wire range:	
Solid wire(AWG):	1/0-20
Stranded wire(AWG):	1/0-20
Torque(Lb-In):	34-36.5

Screw:	M6
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	

K9




Pitch 15.0mm
Poles 1p~10p
K9xxC1531000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	127A
Wire range:	
Solid wire(AWG):	1/0-20
Stranded wire(AWG):	1/0-20
Torque(Lb-In):	34-36.5

Screw:	M6
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	

K9




Pitch 17.5mm
Poles 1p~8p
K9xxD4530000G*
Number of poles






Electrical:	cULus
Voltage rating:	600V
Current rating:	160A
Wire range:	2/0-16AWG
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In):	49

Screw:	M6
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	

E9



Pitch 15.24mm
Poles 1p~12p
E9xx75500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	1000V	1000V
Current rating:	65A	57A
Wire range:	0.5-10mm ²	
Solid wire(AWG):	6-20	
Stranded wire(AWG):	6-20	
Torque:	15.6Lb-In	1.2N.m
Screw:	M4	
Wire strip length:	10-11mm	
Withstanding Voltage:	4.5KV	
Rate impulse voltage:	8KV	
Safety Approval:		

EJ




Pitch 19.0mm
Poles 1p
EJ01D1510000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	100A
Wire range:	
Solid wire(AWG):	3-18
Stranded wire(AWG):	3-18
Torque(Lb-In) :	30
Screw:	M5
Wire strip length:	12-15mm
Withstanding Voltage:	2.2KV
Safety Approval:	

E4




Solid block
Poles 2p/3p/4p/6p
E4xx01800000G*
Number of poles

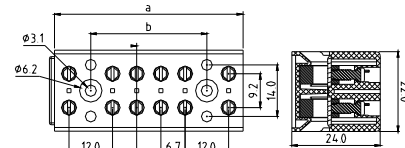


poles	a(mm)	b(mm)
2pole	20	
3pole	31	11
4pole	38	18
6pole	52	32

Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-26
Stranded wire(AWG):	10-26
Torque(Lb-In) :	9
Screw:	M3.5
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

V4



Solid block
Poles 2p~5p
V4xx01800000G*
Number of poles




Poles	a(mm)	b(mm)
2pole	29.0	
3pole	46.0	17.0
4pole	57.0	28.0
5pole	68.0	39.0


Electrical:	cULus
Voltage rating:	600V
Current rating:	65A
Wire range:	
Solid wire(AWG):	6-22
Stranded wire(AWG):	6-22
Torque(Lb-In) :	8.7

Screw:	M4
Wire strip length:	6-7mm
Withstanding Voltage:	2.2KV
Safety Approval:	

Spring Clamp System

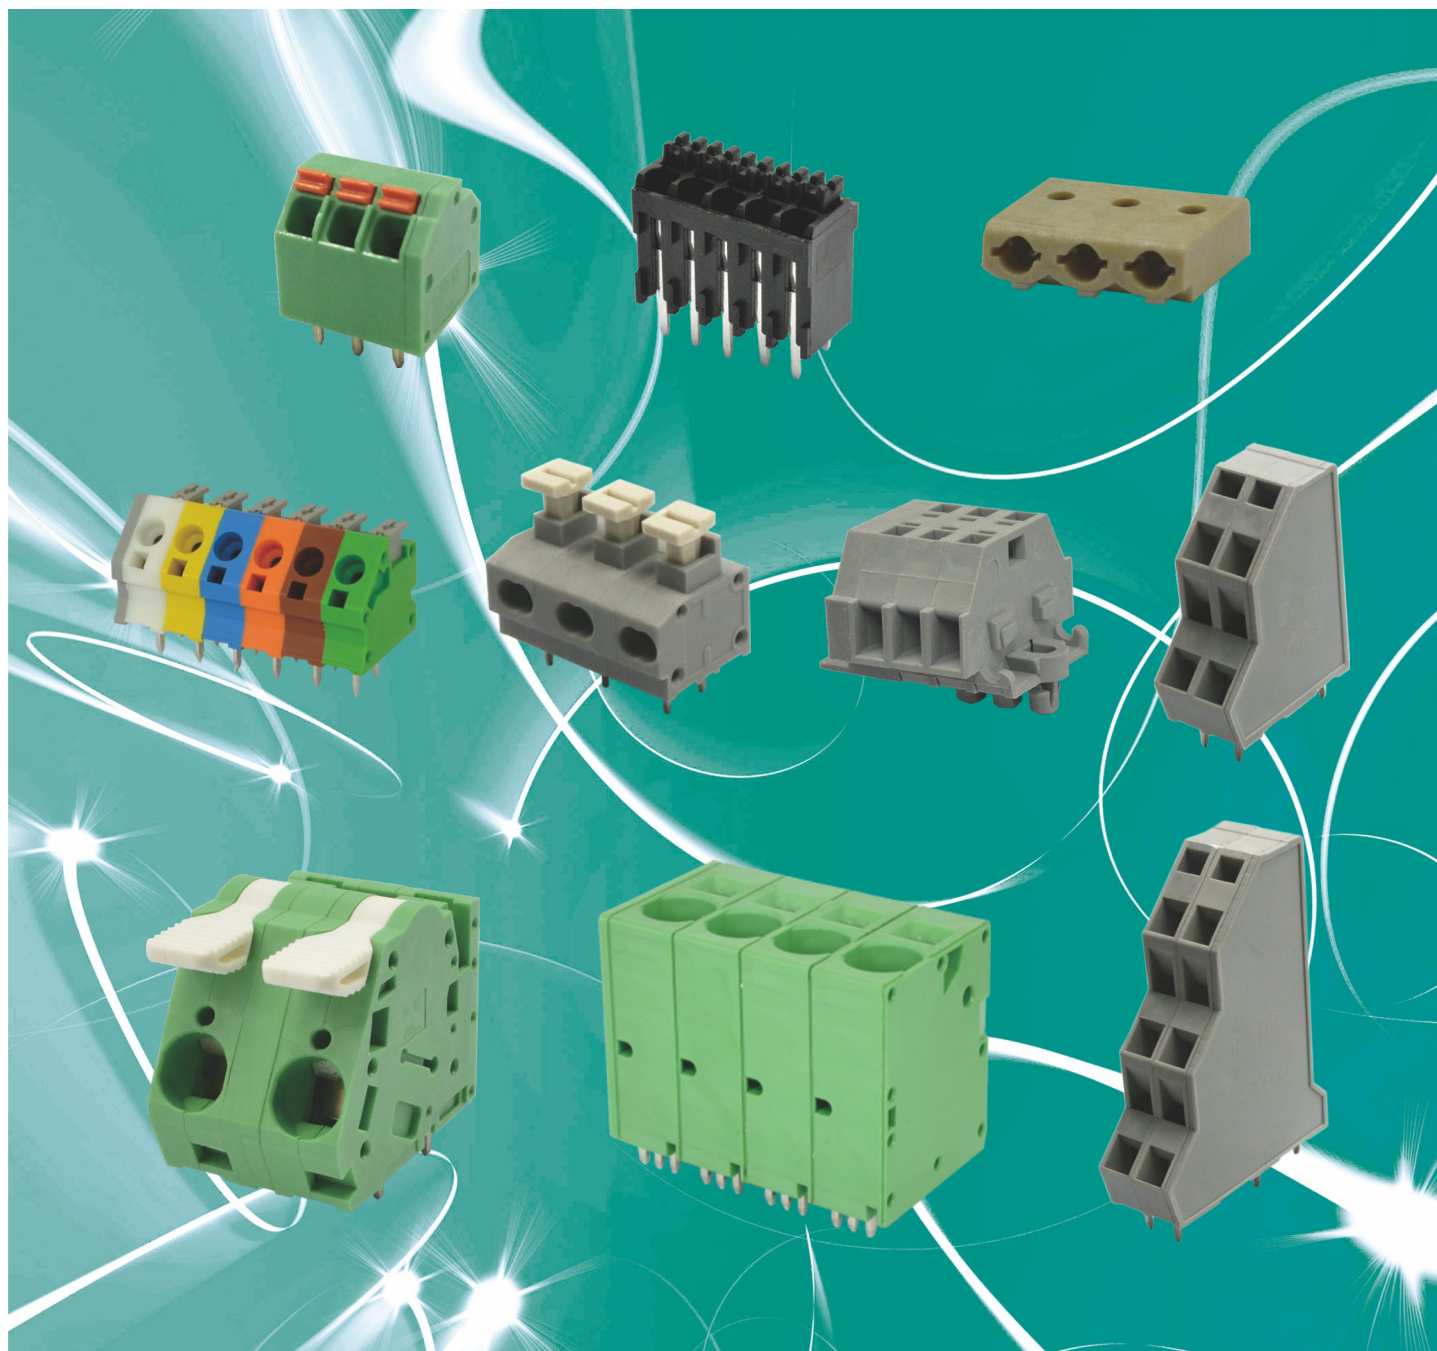


C

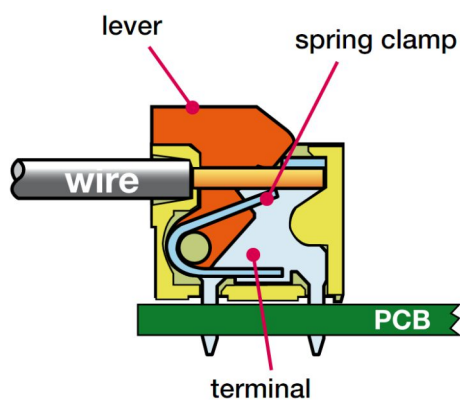


Pitch: 2.5, 2.54, 3.0, 3.5, 3.81, 3.96, 4.0, 4.5, 4.57, 5.0, 5.08, 5.6, 7.0, 7.5, 7.62, 10.0, 10.16, 15.0, 20.0
Rated Voltage Range(cULus): 150V-600V
Rated Current Range(cULus): 2A-65A

NA




Pitch 2.5mm
Vertical (90D wire inlet)
Poles 2p~24p
NAxxB0800000G* A type
NAxxB0810000G* B type
Number of poles

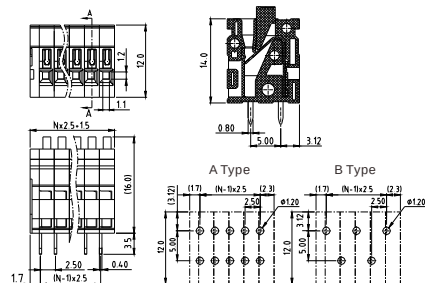


Electrical:	cULus
Voltage rating:	150V
Current rating:	3A
Wire range:	
Solid wire(AWG):	20-28
Stranded wire(AWG):	20-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	

NA




Pitch 2.5mm
Right angle (180D wire inlet)
Poles 2p~24p
NAxxB1800000G* A type
NAxxB1810000G* B type
Number of poles

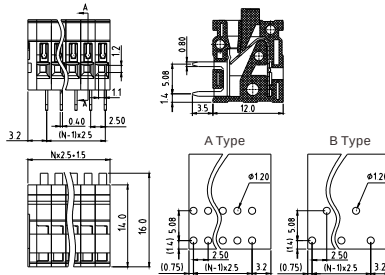


Electrical:	cULus
Voltage rating:	150V
Current rating:	3A
Wire range:	
Solid wire(AWG):	20-28
Stranded wire(AWG):	20-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	

NA




Pitch 2.54mm
Vertical (90D wire inlet)
Poles 2p~24p
NAxx50800000G* A type
NAxx50810000G* B type
Number of poles

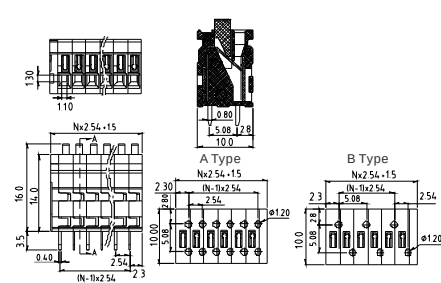


Electrical:	cULus
Voltage rating:	150V
Current rating:	3A
Wire range:	
Solid wire(AWG):	20-28
Stranded wire(AWG):	20-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	

NA




Pitch 2.54mm
Horizontal (180D wire inlet)
Poles 2p~24p
NAxx51800000G* A type
NAxx51810000G* B type
Number of poles

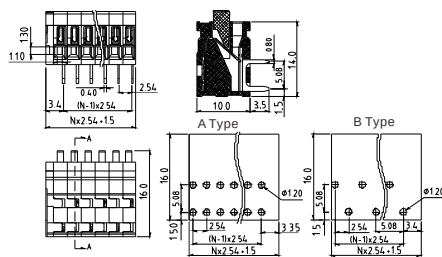


Electrical:	cULus
Voltage rating:	150V
Current rating:	3A
Wire range:	
Solid wire(AWG):	20-28
Stranded wire(AWG):	20-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HC




Pitch 2.5mm-High profile
Poles 2p~24p
HCxxB2800000G*
Number of poles




Electrical:	cULus	CQC
Voltage rating:	300V	300V
Current rating:	2A	2A
Wire range:		
Solid wire(AWG):	20-26	20
Stranded wire(AWG):	20-26	20
Wire strip length:	8.5-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HC




Pitch 2.5mm
High profile Side single row
Poles 2p~24p
HCxxB2800000G*
Number of poles




Electrical:	cULus	CQC
Voltage rating:	150V	150V
Current rating:	2A	2A
Wire range:		
Solid wire(AWG):	20-26	20
Stranded wire(AWG):	20-26	20
Wire strip length:	8.5-10mm	
Withstanding Voltage:	1.6KV	2.0KV
Safety Approval:		

HC




Pitch 2.5mm
Poles 2p~24p
HCxxB080000G*
Number of poles




Electrical:	cULus	CQC	TUV
Voltage rating:	300V	300V	150V
Current rating:	2A	2A	2A
Wire range:	0.2-0.5mm ²		
Solid wire(AWG):	20-26	20	
Stranded wire(AWG):	20-26	20	
Wire strip length:	8.5-10mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

HC




Pitch 2.5mm
Center single row
Poles 2p~24p
HCxxB082000G*
Number of poles

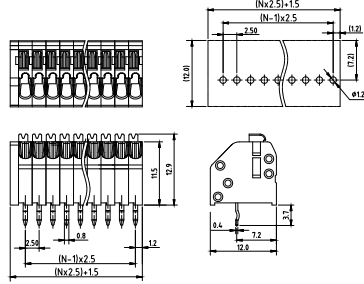


Electrical:	cULus	CQC	TUV
Voltage rating:	150V	150V	150V
Current rating:	2A	2A	2A
Wire range:	0.2-0.5mm ²		
Solid wire(AWG):	20-26	20	
Stranded wire(AWG):	20-26	20	
Wire strip length:	8.5-10mm		
Withstanding Voltage:	1.3KV	2.0KV	2.5KV
Safety Approval:			

HC




Pitch 2.5mm
Double row side contact
link together with end cover
Poles 2p~24p
HCxxB083000G*
Number of poles




Electrical:	cULus	CQC	TUV
Voltage rating:	300V	300V	150V
Current rating:	2A	2A	2A
Wire range:	0.2-0.5mm ²		
Solid wire(AWG):	20-26	20	
Stranded wire(AWG):	20-26	20	
Wire strip length:	8.5-10mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

HC




Pitch 3.5mm
Poles 2p~24p
HCxx0080000G*
Number of poles




Electrical:	cULus	VDE	CQC	TUV
Voltage rating:	300V	130V	300V	500V
Current rating:	6A	6A	6A	8A
Wire range:	0.5-0.75mm ² 0.5-1.5mm ²			
Solid wire(AWG):	16-22		16-20	
Stranded wire(AWG):	16-22		16-20	
Wire strip length:	8.5-10mm			
Withstanding Voltage:	1.6KV	1.25KV	2.5KV	4KV
Safety Approval:				

HC




Pitch 3.5mm
Side single row
Poles 2p~24p
HCxx0081000G*
Number of poles

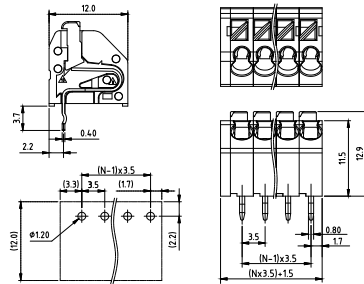


Electrical:	cULus	VDE	CQC	TUV
Voltage rating:	300V	130V	300V	500V
Current rating:	6A	6A	6A	8A
Wire range:	0.5-0.75mm ² 0.5-1.5mm ²			
Solid wire(AWG):	16-22		20	
Stranded wire(AWG):	16-22		20	
Wire strip length:	8.5-10mm			
Withstanding Voltage:	1.6KV	1.25KV	2.5KV	4KV
Safety Approval:				

HC




Pitch 3.5mm
Center single row
Poles 2p~24p
HCxx0082000G*
Number of poles

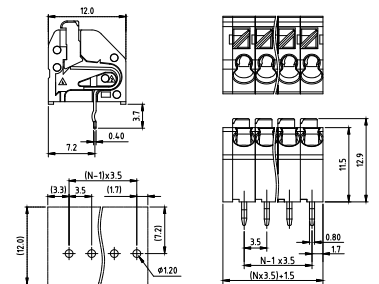


Electrical:	cULus	VDE	CQC	TUV
Voltage rating:	300V	130V	300V	500V
Current rating:	6A	6A	6A	8A
Wire range:	0.5-0.75mm ² 0.5-1.5mm ²			
Solid wire(AWG):	16-22		20	
Stranded wire(AWG):	16-22		20	
Wire strip length:	8.5-10mm			
Withstanding Voltage:	1.6KV	1.25KV	2.5KV	4KV
Safety Approval:				

HC




Pitch 3.5mm
Double row side contact
link together with end cover
Poles 2p~24p
HCxx00830000G*
Number of poles

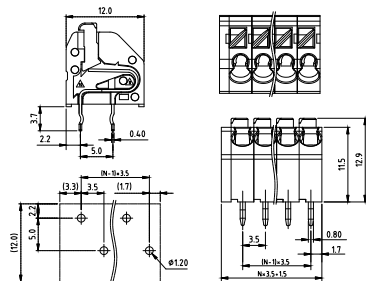


Electrical:	cULus	VDE	CQC	TUV
Voltage rating:	300V	130V	300V	500V
Current rating:	6A	6A	6A	8A
Wire range:	0.5-0.75mm ²		0.5-1.5mm ²	
Solid wire(AWG):	16-22		16-20	
Stranded wire(AWG):	16-22		16-20	
Wire strip length:	8.5-10mm			
Withstanding Voltage:	1.6KV	1.25KV	2.5KV	4KV
Safety Approval:				

HC




Pitch 7.0mm
Poles 2p~12p
HCxx10830000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	6A	6A
Wire range:	0.5-0.75mm ²	
Solid wire(AWG):	16-22	
Stranded wire(AWG):	16-22	
Wire strip length:	8.5-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

HC




Pitch 7.0mm
Poles 2p~12p
HCxx10830000G*
Number of poles

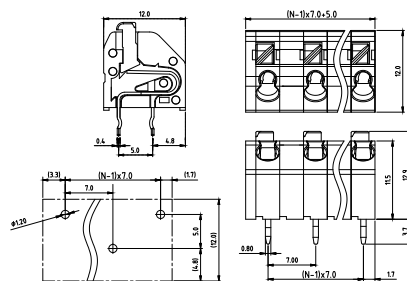


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	6A	6A
Wire range:	0.5-0.75mm ²	
Solid wire(AWG):	16-22	
Stranded wire(AWG):	16-22	
Wire strip length:	8.5-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

HE




Pitch 2.5mm
With lever
Poles 2p~24p
HExx40300000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	22-28
Stranded wire(AWG):	22-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HE




Pitch 2.5mm
Without lever
Poles 2p~12p
HExx40310000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	22-28
Stranded wire(AWG):	22-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HE




Pitch 2.54mm
With lever
Poles 2p~12p
HExx50300000G*
Number of poles

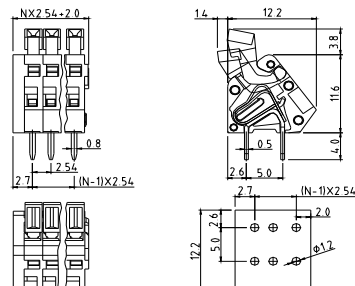


Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	22-28
Stranded wire(AWG):	22-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HE




Pitch 2.54mm
Without lever
Poles 2p~12p
HExx50310000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	22-28
Stranded wire(AWG):	22-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HE




Pitch 5.0mm
With lever
Poles 2p~12p
HExx00400000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	22-28
Stranded wire(AWG):	22-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HE




Pitch 5.08mm
With lever
Poles 2p~12p
HExx20400000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	22-28
Stranded wire(AWG):	22-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	

NQ




Pitch 2.5mm
SMT type, With flange
Poles 2p~3p
NQxx00000000G*
Number of poles




Electrical:	UL	cULus
Voltage rating:	300V	300V
Current rating:	6A	3A
Wire range:		
Solid wire(AWG):	20-26	20-26
Tin Dipped Stranded wire(AWG):	20-26	20-26
Wire strip length:	6-7mm	6-7mm
Withstanding Voltage:	1.6KV	1.6KV
Safety Approval:		

NQ




Pitch 2.5mm
SMT type, With flange
Poles 4p~10p
NQxx00000000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	5A
Wire range:	
Solid wire(AWG):	20-26
Tin Dipped Stranded wire(AWG):	20-26
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NQ




Pitch 2.5mm
SMT type, Without flange
Poles 2p~3p
NQxx01000000G*
Number of poles




Electrical:	UL	cULus
Voltage rating:	300V	300V
Current rating:	6A	3A
Wire range:		
Solid wire(AWG):	20-26	20-26
Tin Dipped Stranded wire(AWG):	20-26	20-26
Wire strip length:	6-7mm	6-7mm
Withstanding Voltage:	1.6KV	1.6KV
Safety Approval:		

NQ




Pitch 2.5mm
SMT type, Without flange
Poles 4p~10p
NQxx01000000G*
Number of poles




Electrical:	UL
Voltage rating:	300V
Current rating:	5A
Wire range:	
Solid wire(AWG):	20-26
Tin Dipped Stranded wire(AWG):	20-26
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NQ




Pitch 3.0mm(Low profile)
SMT type
Poles 1p~3p
NQxx41x000000G*
Number of poles

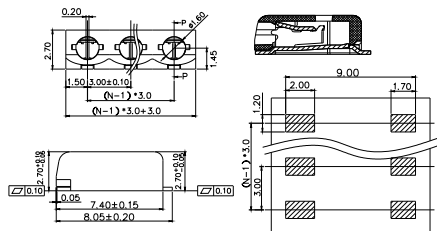


Electrical:	cULus
Voltage rating:	150V
Current rating:	3A
Wire range:	
Solid wire(AWG):	22-26
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	

NQ




Pitch 4.0mm
SMT type
Poles 2p~3p
NQxx21000000G*
Number of poles




Electrical:	UL	cULus
Voltage rating:	300V	300V
Current rating:	9A	5A
Wire range:		
Solid wire(AWG):	18-24	18-24
Tin Dipped Stranded wire(AWG):	18-24	18-24
Wire strip length:	6-7mm	6-7mm
Withstanding Voltage:	1.6KV	1.6KV
Safety Approval:		

HA




Pitch 2.54mm
Horizontal
(180D wire inlet)
Poles 2p~24p
HAxx51500000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	2A
Wire range:	
Solid wire(AWG):	20-26
Stranded wire(AWG):	20-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HA




Pitch 2.54mm
Vertical
(90D wire inlet)
Poles 2p~24p
HAxx50500000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	2A
Wire range:	
Solid wire(AWG):	20-26
Stranded wire(AWG):	20-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HA




Pitch 3.81mm
Horizontal
(180D wire inlet)
Poles 2p~24p
HAxx71500000G*
Number of poles

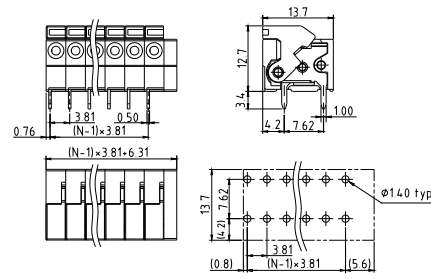


Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HA




Pitch 3.81mm
Vertical
(90D wire inlet)
Poles 2p~24p
HAxx7050000G*
Number of poles

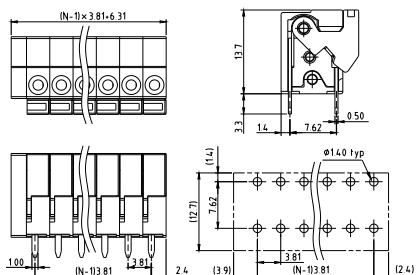


Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HA




Pitch 5.0mm
Horizontal
(180D wire inlet)
Poles 2p~24p
HAxx31500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:	cULus	VDE

HA




Pitch 5.0mm
Vertical
(90D wire inlet)
Poles 1p~24p
HAxx30500000G*
Number of poles

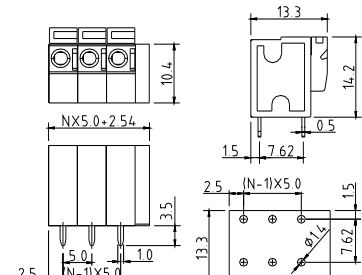


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:	cULus	VDE

HA




Pitch 5.08mm
Horizontal
(180D wire inlet)
Poles 1p~24p
HAxx01500000G*
Number of poles

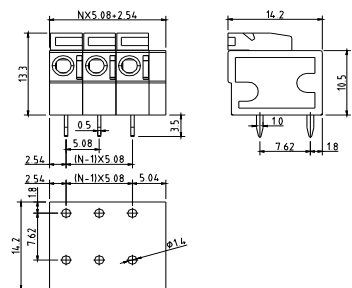


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:	cULus	VDE

HA




Pitch 5.08mm
Vertical
(90D wire inlet)
Poles 1p~24p
HAxx00500000G*
Number of poles

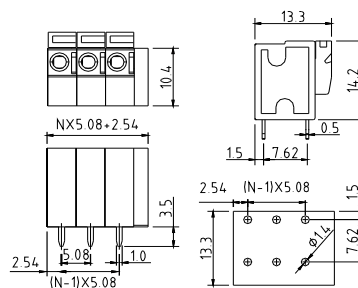


Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:	cULus	VDE

HA




Pitch 7.5mm
Horizontal
(180D wire inlet)
Poles 2p~16p
HAxx61500000G*
Number of poles

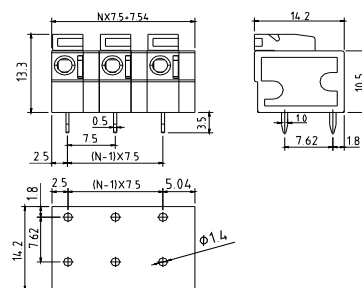


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:	cULus	VDE

HA




Pitch 7.5mm
Vertical
(90D wire inlet)
Poles 2p~16p
HAxx6050000G*
Number of poles

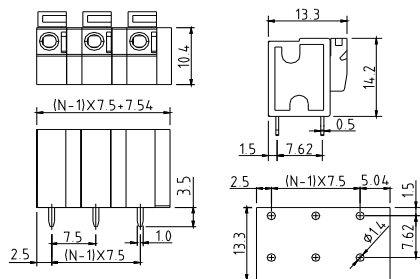


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HA




Pitch 7.62mm
Horizontal
(180D wire inlet)
Poles 2p~16p
HAxx21500000G*
Number of poles

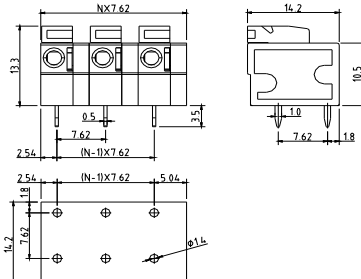


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HA




Pitch 7.62mm
Vertical
(90D wire inlet)
Poles 2p~16p
HAxx20500000G*
Number of poles

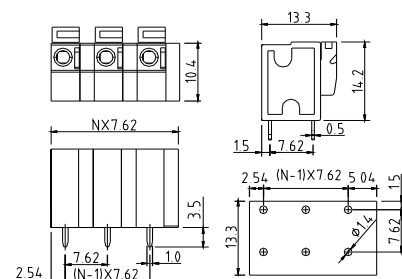


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HA




Pitch 10.0mm
Horizontal
(180D wire inlet)
Poles 2p~12p
HAxx41500000G*
Number of poles

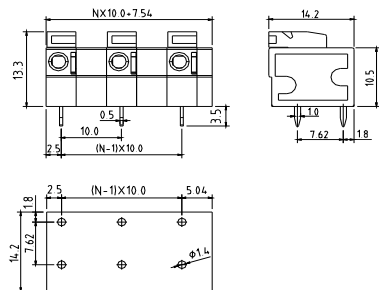


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HA




Pitch 10.0mm
Vertical(90D wire inlet)
Poles 2p~12p
HAxx40500000G*
Number of poles

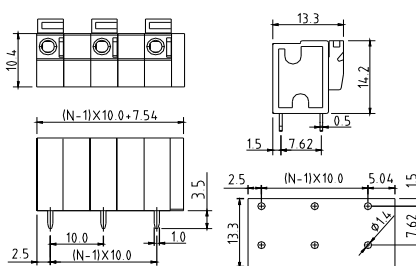


Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.75-1.5mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG):	14-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

NM




Pitch 3.5mm
Horizontal(180D wire inlet)
Poles 2p~24p
NMxx100BxxxxG* THR type
NMxx1001xxxxG* DIP type
Number of poles

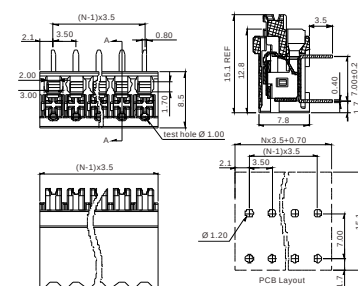


Electrical:	cULus	VDE
Voltage rating:	300V	320V(II/2)
Current rating:	7A Sol. / 10A Str.	13.5A
Wire range:		
Solid wire:	18-24 AWG	0.2-1.0mm ²
Stranded wire:	16-22 AWG	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	1.4KV
Safety Approval:		

NM




Pitch 3.5mm
Vertical(90D wire inlet)
Poles 2p~24p
NMxx100AxxxxG* THR type
NMxx1000xxxxG* DIP type
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	320V(II/2)
Current rating:	7A Sol. / 10A Str.	13.5A
Wire range:		
Solid wire:	18-24 AWG	0.2-1.0mm ²
Stranded wire:	16-22 AWG	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	1.4KV
Safety Approval:		

NM




Pitch 3.5mm
(45D wire inlet)
Poles 2p~24p
NMxx100CxxxxG* THR type
NMxx1002xxxxG* DIP type
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	320V(II/2)
Current rating:	7A Sol. / 10A Str.	13.5A
Wire range:		
Solid wire:	18-24 AWG	0.2-1.0mm ²
Stranded wire:	16-22 AWG	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	1.4KV
Safety Approval:		

HX




Pitch 3.5mm
Horizontal(180D wire inlet)
Poles 1p~24p
HXxx22810000G* (A type Interlace contact)
HXxx23810000G* (B type Double contact)
Number of poles

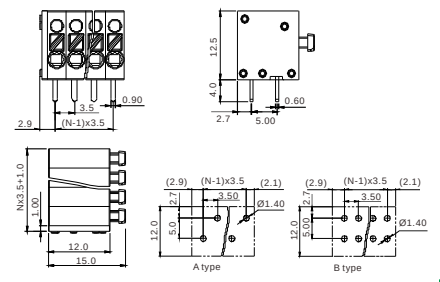


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HX




Pitch 3.5mm-Single in line contact
Vertical(90D wire inlet)
Poles 1p~24p
HXxx21810000G*(B type)
Number of poles

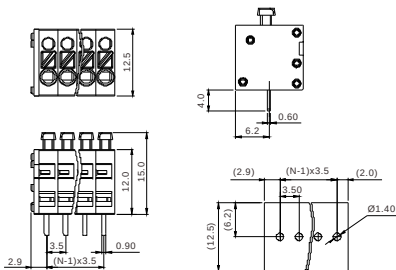


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HX




Pitch 3.5mm-Interlace contact
Vertical(90D wire inlet)
Poles 1p~24p
HXxx20810000G*(A type)
Number of poles

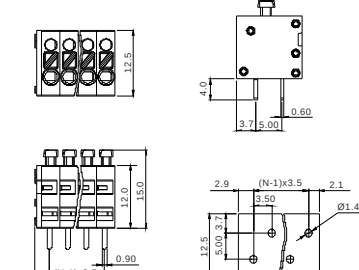


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HX




Pitch 5.0mm
Horizontal(180D wire inlet)
Poles 1p~24p
HXxx01800000G*
Number of poles

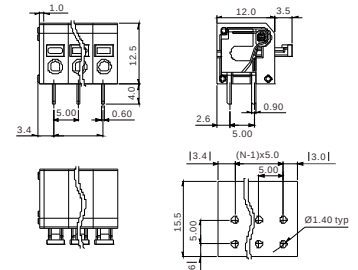


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HX




Pitch 5.0mm
Vertical (90D wire inlet)
Poles 1p~24p
HXxx00800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NH




Pitch 3.5mm
Poles 2p~16p
NHxx10500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NH




Pitch 5.0mm
Poles 2p~24p
NHxx70500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NJ




Pitch 3.5mm
Horizontal (180D wire inlet)
Poles 1p~24p
NJxx21500000G*
Number of poles

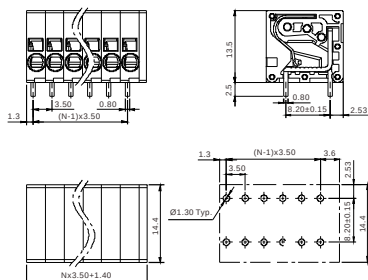


Electrical:	cULus	TUV
Voltage rating:	300V	130V
Current rating:	10A	17.5A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-24	
Stranded wire(AWG)	16-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	1.25KV
Safety Approval:	cULus	TUV

NJ




Pitch 3.5mm
Vertical (90D wire inlet)
Poles 1p~24p
NJxx20500000G*
Number of poles

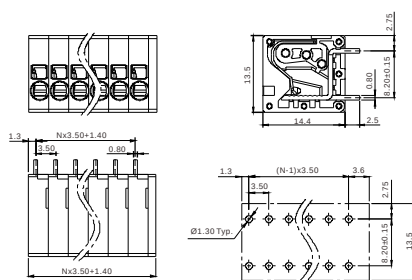


Electrical:	cULus	TUV
Voltage rating:	300V	130V
Current rating:	10A	17.5A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-24	
Stranded wire(AWG)	16-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	1.25KV
Safety Approval:	cULus	TUV

NJ




Pitch 5.0mm
Horizontal (180D wire inlet)
Poles 1p~24p
NJxx01500000G*
Number of poles

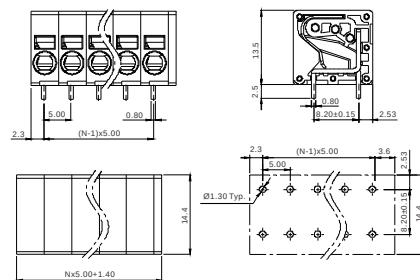


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	13A(Sol)/16A(Str)	32A
Wire range:		0.2-4mm ²
Solid wire(AWG):	14-24	
Stranded wire(AWG)	12-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:	cULus	TUV

NJ




Pitch 5.0mm
Vertical (90D Wire inlet)
Poles 1p~24p
NJxx00500000G*
Number of poles

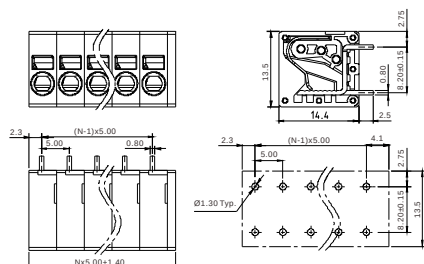


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	13A(Sol)/16A(Str)	32A
Wire range:	0.2-4mm ²	
Solid wire(AWG):	14-24	
Stranded wire(AWG)	12-24	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

NI




Pitch 3.81mm
Poles 1p~24p
NIxx30500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	130V
Current rating:	10A	9A
Wire range:		
Solid wire(AWG):	16-26	0.2-1.5mm ²
Stranded wire(AWG):	16-26	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	1.25KV
Safety Approval:		

NI



Pitch 5.08mm
Poles 1p~24p
NIxx50500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	9A
Wire range:		
Solid wire(AWG):	16-26	0.2-1.5mm ²
Stranded wire(AWG):	16-26	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.0KV
Safety Approval:		

NI



Pitch 3.81mm(THR type)
Poles 1p~24p
NIxx3A000000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	130V
Current rating:	10A	9A
Wire range:		
Solid wire(AWG):	16-26	0.2-1.5mm ²
Stranded wire(AWG):	16-26	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	1.25KV
Safety Approval:		

NI




Pitch 5.08mm(THR type)
Poles 1p~24p
NIxx5A000000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	9A
Wire range:		
Solid wire(AWG):	16-26	0.2-1.5mm ²
Stranded wire(AWG):	16-26	0.2-1.5mm ²
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.0KV
Safety Approval:		

HB




Pitch 3.81mm
Poles 2p~24p
HBxx31800000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	10A	9A
Wire range:	0.5 - 0.75mm ²	
Solid wire(AWG):	16-20	
Stranded wire(AWG):	16-20	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	2KV
Safety Approval:		

HB




Pitch 3.96mm-With lever
Poles 1p~24p
HBxx41800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HB




Pitch 3.96mm-Without lever
Poles 1p~24p
HBxx41810000G*
Number of poles

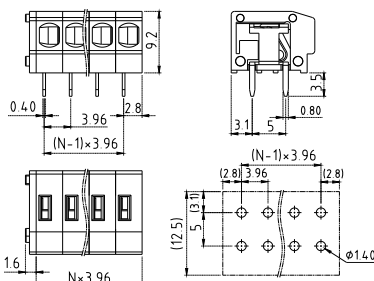


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HB




Pitch 5.0mm
Single With lever
Poles 1p~24p
HBxx01800000G*
Number of poles

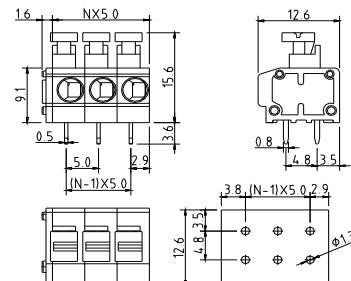


Electrical:	cULus	VDE	CQC
Voltage rating:	300V	450V	450V
Current rating:	10A	9A	24A
Wire range:	0.2-0.75mm²/0.5-2.5mm²		
Solid wire(AWG):	14-20		
Stranded wire(AWG):	14-20		
Wire strip length:	9-10mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:	cULus	VDE	CQC

HB




Pitch 5.0mm
Single Without lever
Poles 1p~24p
HBxx01810000G*
Number of poles

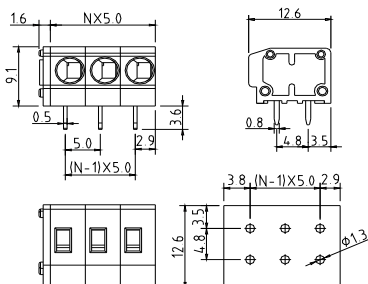


Electrical:	cULus	VDE	CQC
Voltage rating:	300V	450V	450V
Current rating:	10A	9A	24A
Wire range:	0.2-0.75mm²/0.5-2.5mm²		
Solid wire(AWG):	14-20		
Stranded wire(AWG):	14-20		
Wire strip length:	9-10mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:	cULus	VDE	CQC

HB




Pitch 5.0mm
Double With lever
Poles 1p~24p
HBxx02800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	2*18-24
Stranded wire(AWG):	2* 18-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HB




Pitch 7.5mm
Single Without lever
Poles 1p~16p
HBxx21810000G*
Number of poles

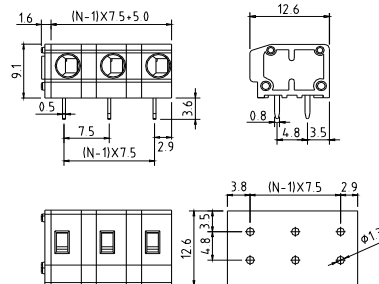


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	10A	9A
Wire range:	0.2-0.75mm²	
Solid wire(AWG):	14-20	
Stranded wire(AWG):	14-20	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:	cULus	VDE

HB




Pitch 7.5mm
Single With lever
Poles 1p~16p
HBxx21800000G*
Number of poles

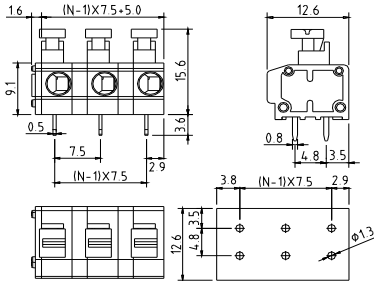


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	10A	9A
Wire range:	0.2-0.75mm ²	
Solid wire(AWG):	14-20	
Stranded wire(AWG):	14-20	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

HB




Pitch 7.5mm
Double With lever
Poles 2p~16p
HBxx22800000G*
Number of poles

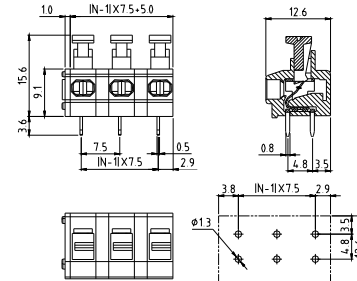


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	2*18-24
Stranded wire(AWG):	2* 18-24
Wire strip length:	9~10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HB




Pitch 10.0mm
Single With lever
Poles 1p~12p
HBxx11800000G*
Number of poles

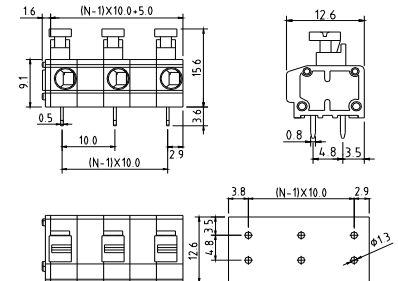


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	10A	9A
Wire range:	0.2-0.75mm ²	
Solid wire(AWG):	14-20	
Stranded wire(AWG):	14-20	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

HB




Pitch 10.0mm
Single Without lever
Poles 1p~12p
HBxx11810000G*
Number of poles

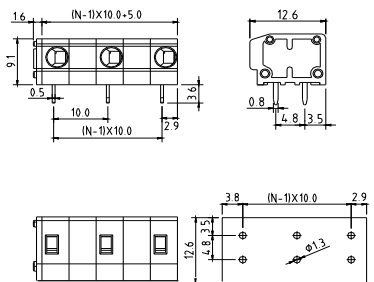


Electrical:	cULus	VDE
Voltage rating:	300V	750V
Current rating:	10A	9A
Wire range:	0.2-0.75mm ²	
Solid wire(AWG):	14-20	
Stranded wire(AWG):	14-20	
Wire strip length:	9-10mm	
Withstanding Voltage:	1.6KV	3KV
Safety Approval:		

HB




Pitch 10.0mm
Double With lever
Poles 2p~12p
HBxx12800000G*
Number of poles

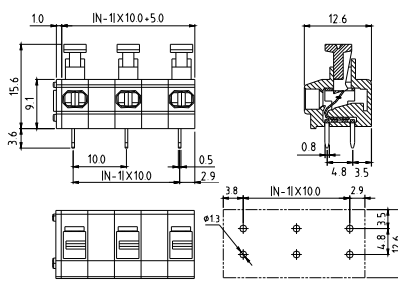


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	2*18-24
Stranded wire(AWG):	2* 18-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HM




Pitch 3.81mm
Dip solder
Poles 1p~24p
HMxx30800000G*
Number of poles

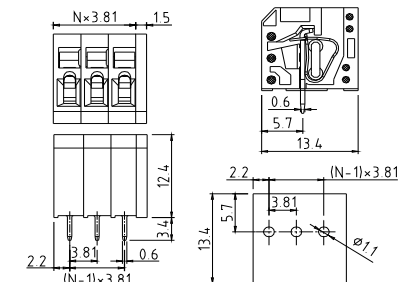


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HM




Pitch 3.81mm
Press fit
Poles 1p~24p
HMxx30810000G*
Number of poles

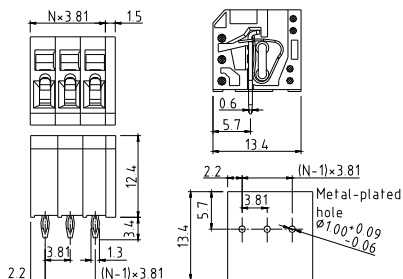


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	
Diameter of metal-plated hole: $1.0^{+0.09}_{-0.06}$	

HM




Pitch 5.0mm
Dip solder
Poles 1p~24p
HMxx70800000G*
Number of poles

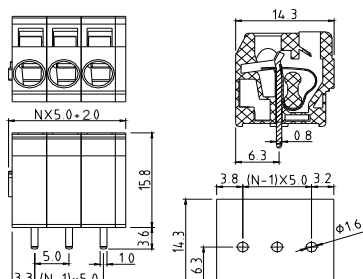


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

HM




Pitch 5.0mm
Press fit
Poles 1p~24p
HMxx70810000G*
Number of poles

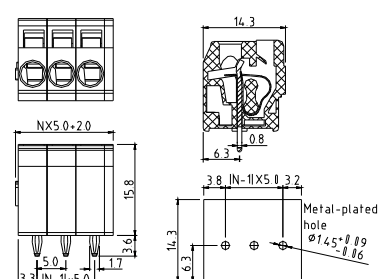


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	
Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$	

HM




Pitch 5.08mm
Dip solder
Poles 1p~24p
HMxx50800000G*
Number of poles

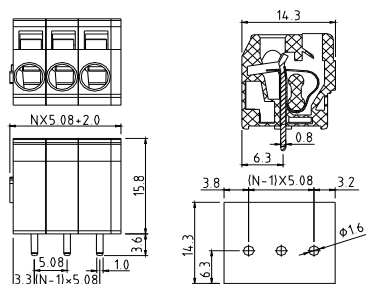


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

HM




Pitch 5.08mm
Press fit
Poles 1p~24p
HMxx50800000G*
Number of poles

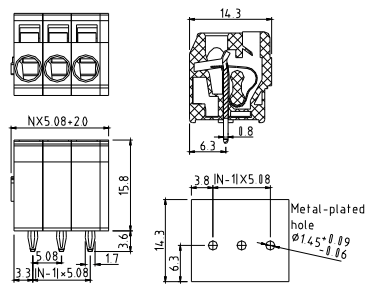


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	
Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$	

HM




Pitch 7.5mm
Dip solder
Poles 1p~16p
HMxx90800000G*
Number of poles

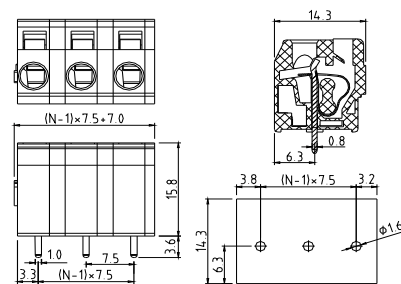


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

HM




Pitch 7.5mm
Press fit
Poles 1p~16p
HMxx90810000G*
Number of poles

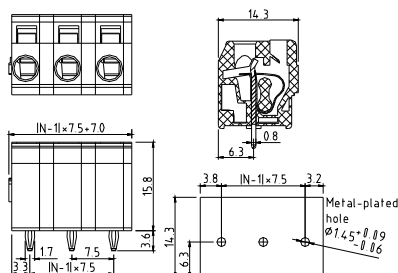


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$

HM




Pitch 7.62mm
Dip solder
Poles 1p~16p
HMxx40800000G*
Number of poles

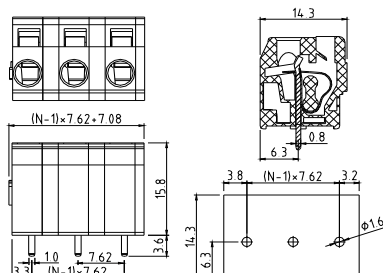


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$

HM




Pitch 7.62mm
Press fit
Poles 1p~16p
HMxx40810000G*
Number of poles

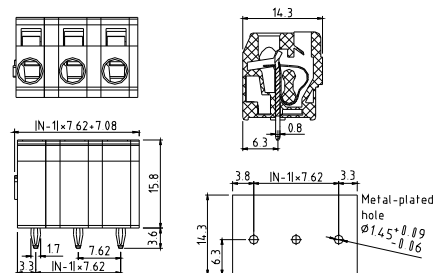


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$

HM




Pitch 10.0mm
Dip solder
Poles 1p~12p
HMxx80810000G*
Number of poles

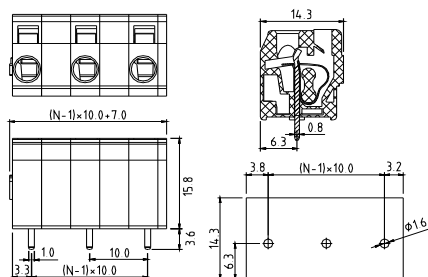


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$

HM




Pitch 10.0mm
Press fit
Poles 1p~12p
HMxx80810000G*
Number of poles

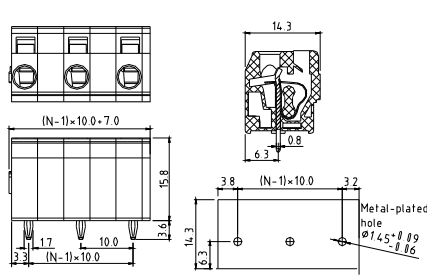


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$

HM




Pitch 10.16mm
Dip solder
Poles 1p~12p
HMxx60800000G*
Number of poles

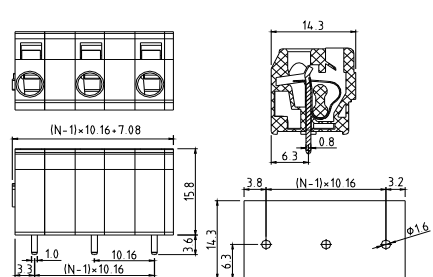


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	

Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$

HM




Pitch 10.16mm
Press fit
Poles 1p~12p
HMxx60810000G*
Number of poles

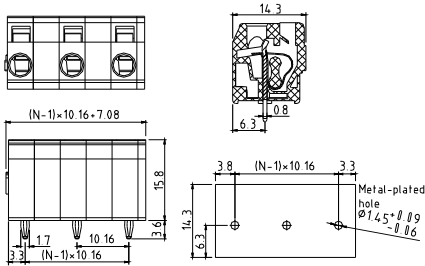


Electrical:	cULus
Voltage rating:	250V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	cULus
Diameter of metal-plated hole: $1.45^{+0.09}_{-0.06}$	

HV




Pitch 3.81mm
Poles 2p~24p
HVxx30800000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	500V
Current rating:	8A	10A
Wire range:	0.5-1.5mm ²	
Solid wire(AWG):	16-20	
Stranded wire(AWG):	16-20	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	1.89KV
Safety Approval:	cULus	TUV

TN




Pitch 4.5mm
Without cover
Horizontal (180D wire inlet)
Poles 3p/6p
TNxx29100000G*
Number of poles

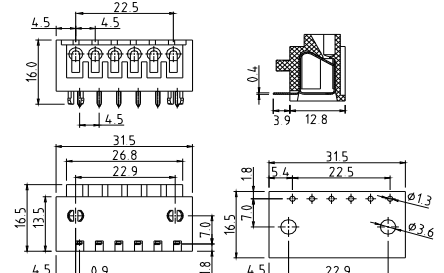


Electrical:	cULus
Voltage rating:	300V
Current rating:	2A
Wire range:	
Solid wire(AWG):	18
Stranded wire(AWG):	18
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

TN




Pitch 4.5mm
With cover
Horizontal (180D wire inlet)
Poles 3p/6p
TNxx29200000G*
Number of poles

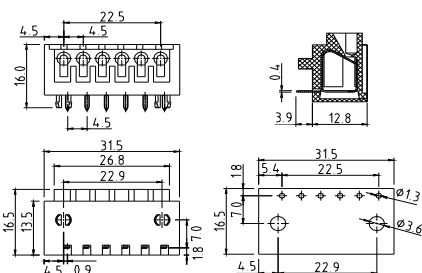


Electrical:	cULus
Voltage rating:	300V
Current rating:	2A
Wire range:	
Solid wire(AWG):	18
Stranded wire(AWG):	18
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

TN




Pitch 4.57mm
Without cover
Vertical (90D wire inlet)
Poles 3p/6p
TNxx19000000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	2A
Wire range:	
Solid wire(AWG):	18
Stranded wire(AWG):	18
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

TN



Pitch 4.57mm
With cover
Vertical (90D wire inlet)
Poles 3p/6p
TNxx19900000G*
Number of poles

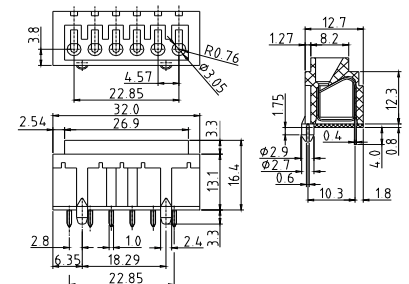

Electrical:	cULus
Voltage rating:	300V
Current rating:	2A
Wire range:	
Solid wire(AWG):	18
Stranded wire(AWG):	18
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

A LEGO Technic motor, which is a small grey plastic component with three circular openings on the front and three pins at the bottom.

Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-22
Stranded wire(AWG):	
Wire strip length:	7-7.5mm
Withstanding Voltage:	1.6KV
Safety Approval:	ULus

[illegible]

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	ULus

Technical drawings of a mechanical part, showing front, top, and side views with dimensions and tolerances.

Front View (Top Left): Shows a rectangular part with a central slot. Dimensions include a total width of 13.8, a central slot width of 4.0, and a slot depth of 5.0. The number of slots is indicated as $N = 5.0 \pm 1.6$.

Top View (Bottom Left): Shows the part from above, with a total width of 5.20 and a central slot width of 1.5. The number of slots is indicated as $N = 1.6$.

Side View (Top Right): Shows the part from the side, with a total height of 11.0, a central slot width of 4.0, and a slot depth of 5.0. The number of slots is indicated as $N = 5.0 \pm 1.6$.

Bottom View (Bottom Right): Shows the part from below, with a total width of 13.8, a central slot width of 4.0, and a slot depth of 5.0. The number of slots is indicated as $N = 5.0 \pm 1.6$.


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	ULus

Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus


[illegible]

Electrical:	cULus	VDE
Voltage rating:	300V	450V
Current rating:	10A	10A
Wire range:	0.5-1.0mm ²	
Solid wire(AWG):	16-20	
Stranded wire(AWG):		
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HF




Pitch 5.0mm
Low profile type(Stackable)
Poles 1p~24p
HFxx70820000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H7




Pitch 5.0mm
Poles 2p~24p
H7xx00830000G*
Number of poles

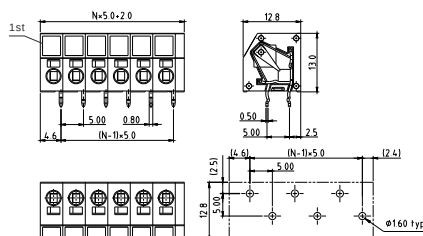


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H7




Pitch 7.5mm
Poles 2p~12p
H7xx10830000G*
Number of poles

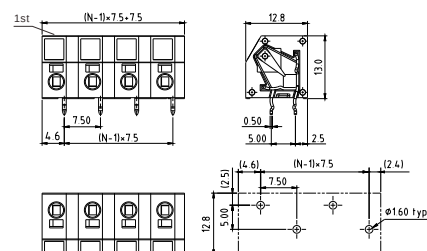


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NE




Pitch 5.0mm
Poles 2p~24p
NExx00800000G*
Number of poles

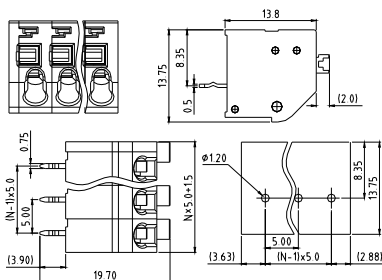


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NE




Pitch 7.5mm
Poles 2p~16p
NExx20800000G*
Number of poles

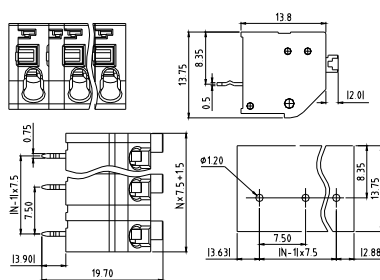


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HG




Pitch 5.0mm
Poles 1p~24p
HGxx00800000G*
Number of poles

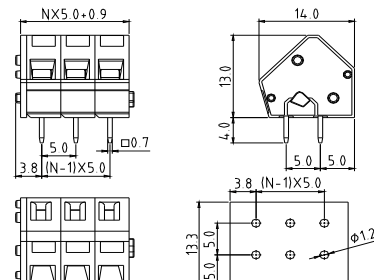


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	15A	32A
Wire range:	0.2-4mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:	cULus	TUV

HG




Pitch 5.08mm
Poles 1p~24p
HGxx30800000G*
Number of poles

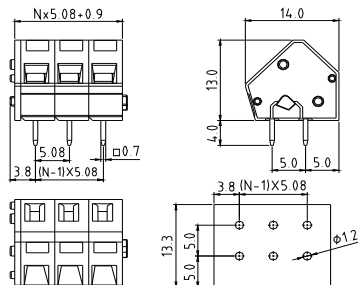


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	15A	32A
Wire range	0.2-4mm ²	
Solid wire(AWG):	12-28	
Stranded wire(AWG):	12-28	
Wire strip length:	5-6mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

HG




Pitch 7.5mm
Poles 2p~16p
HGxx20800000G*
Number of poles

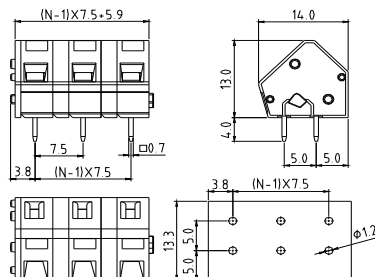


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HG




Pitch 7.62mm
Poles 2p~16p
HGxx50800000G*
Number of poles

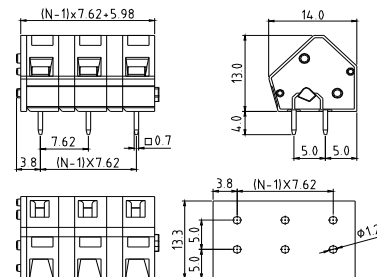


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HG




Pitch 10.0mm
Poles 2p~12p
HGxx10800000G*
Number of poles

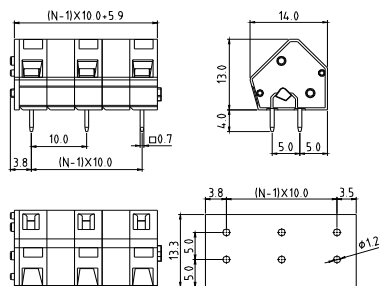


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HG




Pitch 10.16mm
Poles 2p~12p
HGxx40800000G*
Number of poles

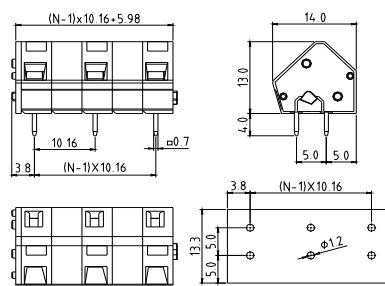


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HT




Pitch 5.0mm
Poles 1p~24p
HTxx00800000G*
Number of poles

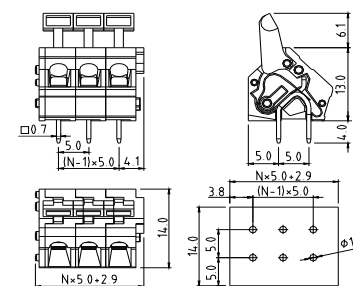


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HT




Pitch 5.08mm
Poles 1p~24p
HTxx30800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HT




Pitch 7.5mm
Poles 2p~16p
HTxx20800000G*
Number of poles

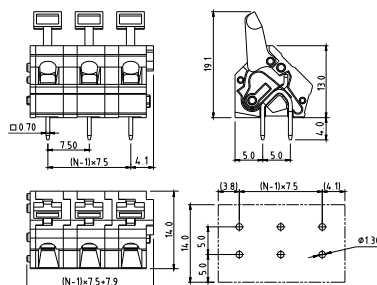


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HT




Pitch 7.62mm
Poles 2p~16p
HTxx50800000G*
Number of poles

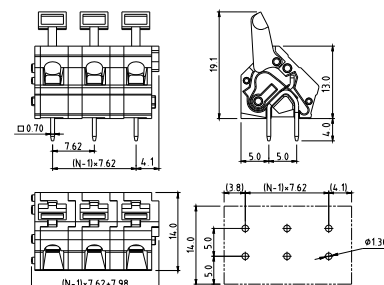


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HT




Pitch 10.0mm
Poles 2p~12p
HTxx10800000G*
Number of poles

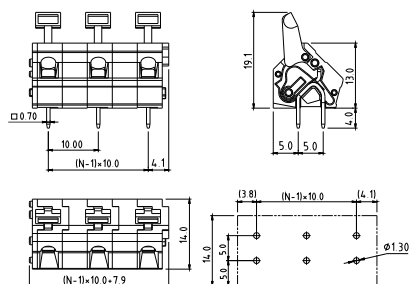


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HT




Pitch 10.16mm
Poles 2p~12p
HTxx40800000G*
Number of poles

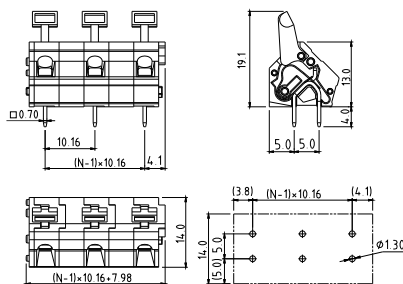


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H3




Pitch 5.0mm
Poles 2p~24p
H3xx00800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H3




Pitch 7.5mm
Poles 2p~16p
H3xx10800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H3




Pitch 10.0mm
Poles 2p~12p
H3xx20800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H6




Pitch 5.0mm
(Round hole)
Poles 2p~24p
H6xx00800000G *
Number of poles

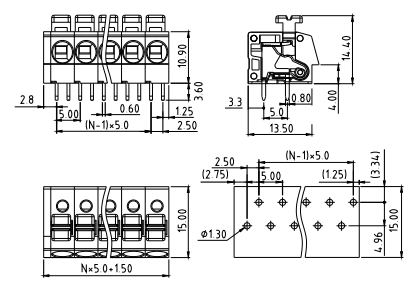


Electrical:	UL1059
Voltage rating:	300V
Current rating:	11A
Wire range:	
Solid wire(AWG):	12-20
Stranded wire(AWG):	12-20
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV

H6




Pitch 5.0mm
(Square hole)
Poles 2p~24p
H6xx00801000G*
Number of poles




Electrical:	cULus	CQC	TUV
Voltage rating:	300V	360V	450V
Current rating:	11A	32A	24A
Wire range(mm²):		0.5-4	0.5-4
Solid wire(AWG):	12-20		
Stranded wire(AWG):	12-20		
Wire strip length:	10-11mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:	cULus	CQC	TUV

H6




Pitch 7.5mm
(Square hole)
Poles 2p~16p
H6xx20801000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	11A	24A
Wire range:		0.5-4mm²
Solid wire(AWG):	12-20	
Stranded wire(AWG):	12-20	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	3.0KV
Safety Approval:	cULus	TUV

H6





Pitch 10.0mm
(Square hole)
Poles 2p~12p
H6xx20801000G*
Number of poles

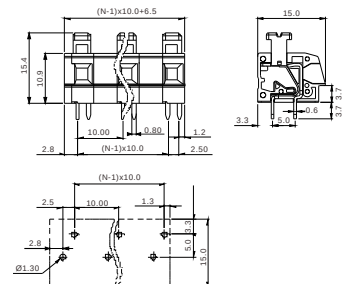



Electrical:	cULus	TUV
Voltage rating:	300V	1000V
Current rating:	11A	24A
Wire range:		0.5-4mm²
Solid wire(AWG):	12-20	
Stranded wire(AWG):	12-20	
Wire strip length:	10-11mm	
Withstanding Voltage:	1.6KV	3.5KV
Safety Approval:	cULus	TUV

H6

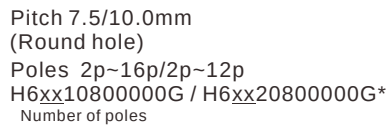



Electrical:	UL1059
Voltage rating:	300V
Current rating:	11A
Wire range:	
Solid wire(AWG):	12-20
Stranded wire(AWG)	12-20
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV

HD





Electrical:	cULus
Voltage rating:	250V
Current rating:	12A
Wire range:	
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-22
Wire strip length:	8-9mm
Withstanding Voltage:	1.5KV
Safety Approval:	cULus

H9

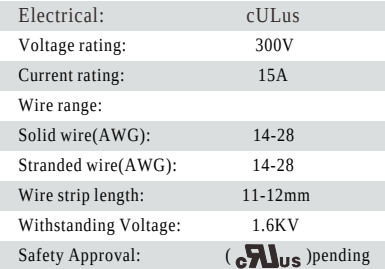



Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HQ





Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HQ





Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	ULus

HQ





Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus



HQ

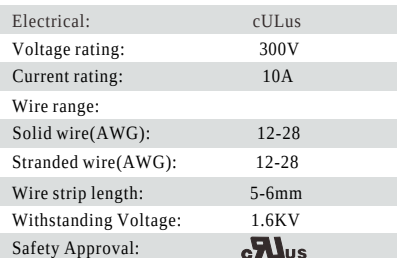



HQ

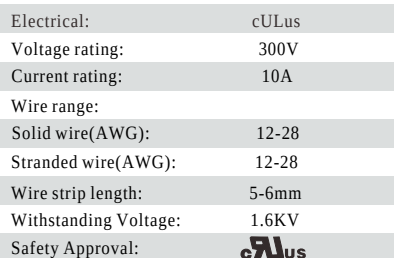



HQ

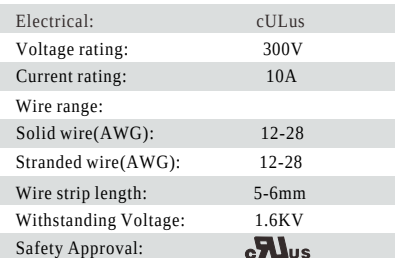



HQ

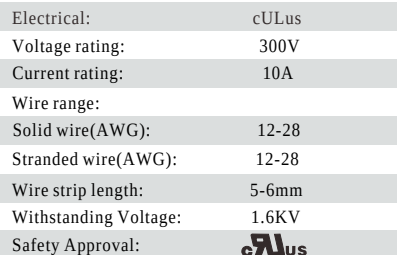

HQ

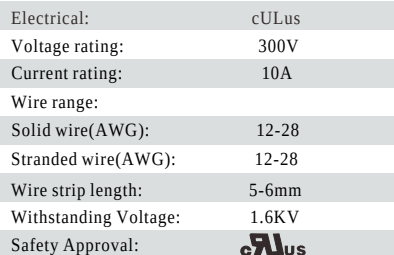


HR

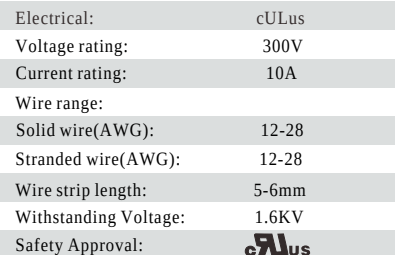

HR




Pitch 5.08mm-Interlace
Poles 3*1p~3*24p
HRxx30810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HR




Pitch 7.62mm-Parallel
Poles 3*1p~3*16p
HRxx50800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HR




Pitch 7.62mm-Interlace
Poles 3*1p~3*16p
HRxx50810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HR




Pitch 10.16mm-Parallel
Poles 3*1p~3*12p
HRxx40800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HR



Pitch 10.16mm-Interlace
Poles 3*1p~3*12p
HRxx40810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS



Pitch 5.0mm-Parallel
Poles 4*2p~4*24p
HSxx00800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS



Pitch 5.0mm-Interlace
Poles 4*2p~4*24p
HSxx00810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS



Pitch 5.08mm-Parallel
Poles 4*2p~4*24p
HSxx30800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS




Pitch 5.08mm-Interlace
Poles 4*2p~4*24p
HSxx30810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS



Pitch 7.5mm-Parallel
Poles 4*2p~4*16p
HSxx10800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS




Pitch 7.5mm-Interlace
Poles 4*2p~4*16p
HSxx10810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS




Pitch 7.62mm-Parallel
Poles 4*2p~4*16p
HSxx50800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HS




Pitch 7.62mm-Interlace
Poles 4*2p~4*16p
HSxx50810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HS




Pitch 10.0mm-Parallel
Poles 4*2p~4*12p
HSxx20800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HS




Pitch 10.0mm-Interlace
Poles 4*2p~4*12p
HSxx20810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HS



Pitch 10.16mm-Parallel
Poles 4*2p~4*12p
HSxx40800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HS



Pitch 10.16mm-Interlace
Poles 4*2p~4*12p
HSxx40810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NK




Pitch 7.5mm
180D wire inlet (Parallel tail A type)
Poles 1p~16p
NKxxA1500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating(Sol):	30A
Current rating(Str):	35A
Solid wire(AWG):	10-24
Stranded wire(AWG):	8-24
Wire strip length:	15-16mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NK




Pitch 7.5mm
90D wire inlet (Parallel tail A type)
Poles 1p~16p
NKxxA0500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	450V
Current rating(Sol):	30A	41A
Current rating(Str):	35A	41A
Solid wire(AWG):	10-24	0.2-10mm ²
Stranded wire(AWG)	8-24	0.2-6mm ²
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

NK




Pitch 7.5mm
180D wire inlet (Interlace tail B type)
Poles 1p~16p
NKxxA1510000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	
Current rating(Sol):	30A	
Current rating(Str):	35A	
Solid wire(AWG):	10-24	
Stranded wire(AWG)	8-24	
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	
Safety Approval:		

NK




Pitch 7.5mm
90D wire inlet (Interlace tail B type)
Poles 1p~16p
NKxxA0510000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	1000V
Current rating(Sol):	30A	41A
Current rating(Str):	35A	41A
Solid wire(AWG):	10-24	0.2-10mm ²
Stranded wire(AWG)	8-24	0.2-6mm ²
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	3.5KV
Safety Approval:		

NK




Pitch 7.5mm
90D wire inlet (Single tail C type)
Poles 1p~16p
NKxxA0520000G*
Number of poles

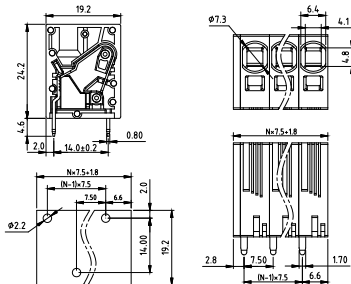


Electrical:	cULus	TUV
Voltage rating:	300V	1000V
Current rating(Sol):	30A	41A
Current rating(Str):	35A	41A
Solid wire(AWG):	10-24	0.2-10mm ²
Stranded wire(AWG)	8-24	0.2-6mm ²
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	3.5KV
Safety Approval:		

NK



Pitch 7.5mm
180D wire inlet (Single tail C type)
Poles 1p~15p
NKxxA1520000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	
Current rating(Sol):	30A	
Current rating(Str):	35A	
Solid wire(AWG):	10-24	
Stranded wire(AWG)	8-24	
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	
Safety Approval:		

NK




Pitch 7.5mm
90D wire inlet (Single tail B type)
Poles 1p~16p
NKxxA05B0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating(Sol):	30A	41A
Current rating(Str):	35A	41A
Solid wire(AWG):	10-24	0.2-10mm ²
Stranded wire(AWG)	8-24	0.2-6mm ²
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	3.5KV
Safety Approval:		

NK




Pitch 7.5mm
90D wire inlet (Single tail C type)
Poles 1p~16p
NKxxA05C0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating(Sol):	30A	41A
Current rating(Str):	35A	41A
Solid wire(AWG):	10-24	0.2-10mm ²
Stranded wire(AWG)	8-24	0.2-6mm ²
Wire strip length:	15-16mm	
Withstanding Voltage:	1.6KV	3.5KV
Safety Approval:		

H2




Pitch 7.5mm
Poles 1p~12p
H2xx00800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H2




Pitch 10.0mm
Poles 1p~12p
H2xx10800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NP




Pitch 10.0mm
90D wire inlet (Parallel tail A type)
Poles 1p~12p
NPxx10500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	50A	76A
Wire range:		0.75-16mm ²
Solid wire(AWG):	8-20	
Stranded wire(AWG):	4-20	
Wire strip length:	18-19mm	
Withstanding Voltage:	1.6KV	2.0KV
Safety Approval:		

NP




Pitch 10.0mm
90D wire inlet (Interlace tail B type)
Poles 2p~12p
NPxx10510000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	1000V
Current rating:	50A	76A
Wire range:		0.75-16mm ²
Solid wire(AWG):	8-20	
Stranded wire(AWG):	4-20	
Wire strip length:	18-19mm	
Withstanding Voltage:	1.6KV	3.5KV
Safety Approval:		

NP




Pitch 10.0mm
180D wire inlet (Interlace tail A type)
Poles 1p~12p
NPxx11500000G*
Number of poles

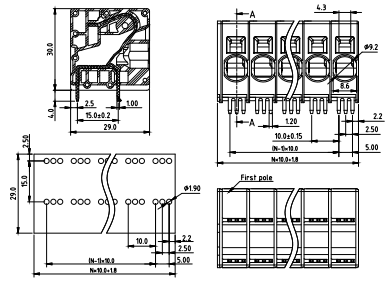


Electrical:	cULus
Voltage rating:	300V
Current rating(Sol):	30A
Current rating(Str):	40A
Solid wire(AWG):	8-20
Stranded wire(AWG):	4-20
Wire strip length:	18-19mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NP




Pitch 10.0mm
180D wire inlet (Interlace tail B type)
Poles 1p~12p
NPxx11510000G*
Number of poles

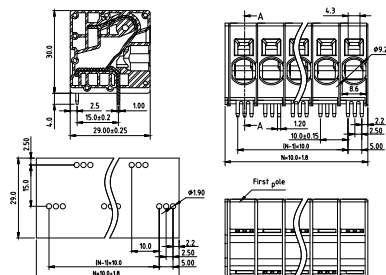


Electrical:	cULus
Voltage rating:	600V
Current rating(Sol):	30A
Current rating(Str):	40A
Solid wire(AWG):	8-20
Stranded wire(AWG):	4-20
Wire strip length:	18-19mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

NP




Pitch 10.0mm
180D wire inlet (Interlace tail C type)
Poles 1p~12p
NPxx11520000G*
Number of poles

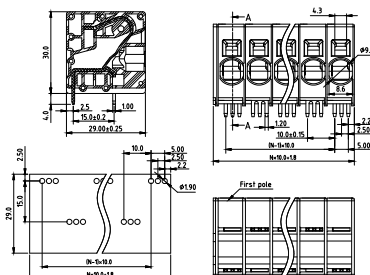


Electrical:	cULus
Voltage rating:	600V
Current rating(Sol):	30A
Current rating(Str):	40A
Solid wire(AWG):	8-20
Stranded wire(AWG):	4-20
Wire strip length:	18-19mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

H8




Pitch 10.0mm
Poles 2p~24p
H8xx00800000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	37A
Wire range:	
Solid wire(AWG):	6-24
Stranded wire(AWG):	6-24
Wire strip length:	12-13mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H8




Pitch 10.0mm-W/F
Poles 2p~12p
H8xx00810000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	37A
Wire range:	
Solid wire(AWG):	6-24
Stranded wire(AWG):	6-24
Wire strip length:	12-13mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H8




Pitch 15.0mm
Poles 2p~8p
H8xx10800000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	37A
Wire range:	
Solid wire(AWG):	6-24
Stranded wire(AWG):	6-24
Wire strip length:	12-13mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

H8




Pitch 15.0mm-W/F
Poles 2p~8p
H8xx10810000G*
Number of poles

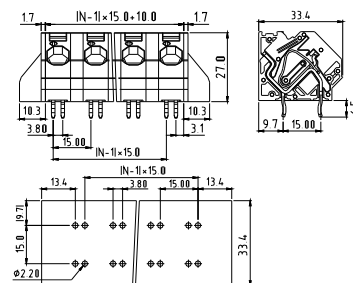


Electrical:	cULus
Voltage rating:	600V
Current rating:	37A
Wire range:	
Solid wire(AWG):	6-24
Stranded wire(AWG):	6-24
Wire strip length:	12-13mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

H8




Pitch 20.0mm
Poles 2p~8p
H8xx20800000G*
Number of poles

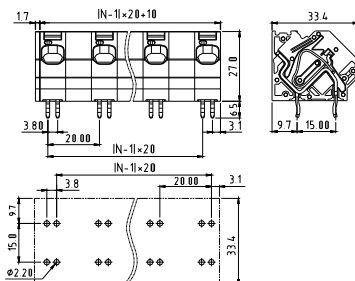


Electrical:	cULus
Voltage rating:	600V 600V
Current rating:	37A 57A
Wire range(AWG):	6-24
Solid wire(AWG):	6-24
Stranded wire(AWG):	6-24
Wire strip length:	12-13mm
Withstanding Voltage:	2.2KV 2.2KV
Safety Approval:	cULus

H8



Pitch 20.0mm-W/F
Poles 2p~8p
H8xx20810000G*
Number of poles

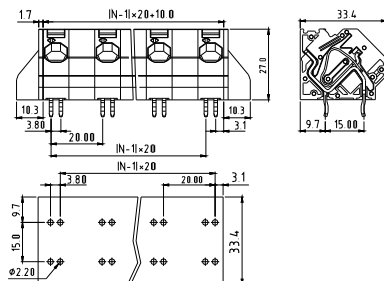


Electrical:	cULus
Voltage rating:	600V 600V
Current rating:	37A 57A
Wire range(AWG):	6-24
Solid wire(AWG):	6-24
Stranded wire(AWG):	6-24
Wire strip length:	12-13mm
Withstanding Voltage:	2.2KV 2.2KV
Safety Approval:	cULus

NZ




Pitch 7.5mm(Interlace tail)
Poles 2p~12p
NZxx205C0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	800V
Current rating:	30A	41A
Wire range:	0.75-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Wire strip length:	11-12mm	
Withstanding Voltage:	2.2KV	4.2KV
Safety Approval:	cULus	△

NZ




Pitch 10.0mm(With jumper slot)
Poles 1p~12p
NZxx005A0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	400V
Current rating:	55A	76A
Wire range:	0.75-16mm ²	
Solid wire(AWG):	6-16	
Stranded wire(AWG):	6-16	
Wire strip length:	12-13mm	
Withstanding Voltage:	1.6KV	3.1KV
Safety Approval:	cULus	△

NZ



Pitch 10.0mm(Without jumper slot)
Poles 1p~12p
NZxx005B0000G*
Number of poles

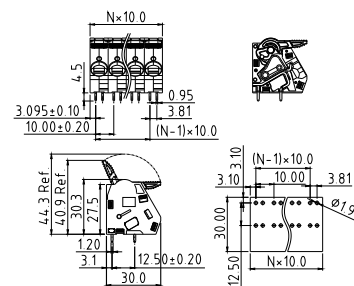


Electrical:	cULus	TUV
Voltage rating:	300V	400V
Current rating:	55A	76A
Wire range:	0.75-16mm ²	
Solid wire(AWG):	6-16	
Stranded wire(AWG):	6-16	
Wire strip length:	12-13mm	
Withstanding Voltage:	1.6KV	3.1KV
Safety Approval:	cULus	△

NZ




Pitch 15.0mm(With jumper slot)
Poles 1p~8p
NZxx105A0000G*
Number of poles

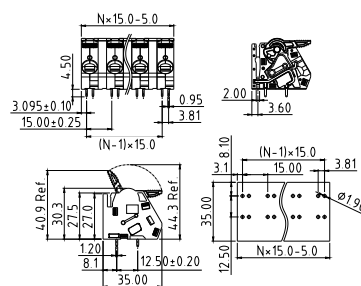


Electrical:	cULus	TUV
Voltage rating:	600V	800V
Current rating:	65A	76A
Wire range:	0.75-16mm ²	
Solid wire(AWG):	6-16	
Stranded wire(AWG):	6-16	
Wire strip length:	12-13mm	
Withstanding Voltage:	2.2KV	4.2KV
Safety Approval:	cULus	△

NZ



Pitch 15.0mm(Without jumper slot)
Poles 1p~8p
NZxx105B0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	600V	800V
Current rating:	65A	76A
Wire range:	0.75-16mm ²	
Solid wire(AWG):	6-16	
Stranded wire(AWG):	6-16	
Wire strip length:	12-13mm	
Withstanding Voltage:	2.2KV	4.2KV
Safety Approval:	cULus	△

N6




Pitch 6.35mm
Poles 2p~20p
N6xx30000000G*
Number of poles

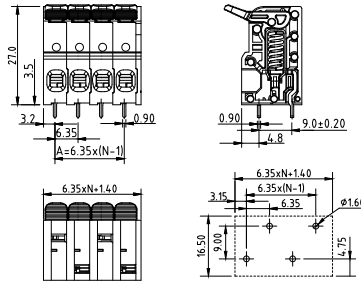


Electrical:	cULus	TUV
Voltage rating:	600V	800V/1000V
Current rating:	30A	41A
Wire range:	0.2-6mm ²	
Solid wire(AWG):	10-24	
Stranded wire(AWG):	10-24	
Wire strip length:	10.5mm	
Withstanding Voltage:	2.2KV	4.2KV
Safety Approval:	cULus	△

WS-02




Pitch 5.08mm
Poles 52p
WS00252800x0G*
Number of poles

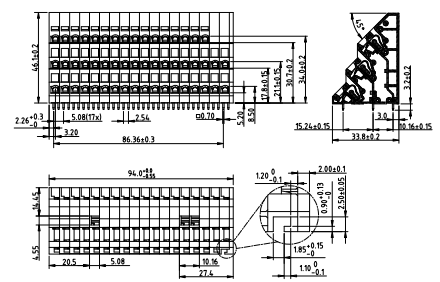


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Wire strip length:	5-6mm
Withstanding Voltage:	
Safety Approval:	cULus

XA



Pitch 6.35 & 60mm
Poles 1p~12p
XAxx120000000G*
Number of poles

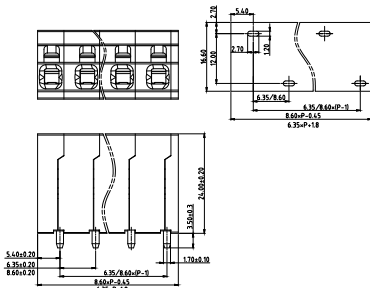


Electrical:	cULus	VDE
Voltage rating:	600V	1000V
Current rating:	30A	41A
Wire range:		
Solid wire(AWG):	10-24	0.5-6mm ²
Stranded wire(AWG):	10-24	1.0-6mm ²
Torque(Lb-In) :		

Screw:	
Wire strip length:	11-12mm
Withstanding Voltage:	2.2KV 2.2KV
Safety Approval:	cULus △

XA




Pitch 6.35mm-180D
Poles 1p~12p
XAxx110000000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	30A
Wire range:	
Solid wire(AWG):	10-24
Stranded wire(AWG):	10-24
Torque(Lb-In) :	

Screw:	
Wire strip length:	11-12mm
Withstanding Voltage:	2.0KV
Safety Approval:	cULus

N9




Pitch 3.81mm
Poles 2p~12p
N9xx10000000G*
Number of poles

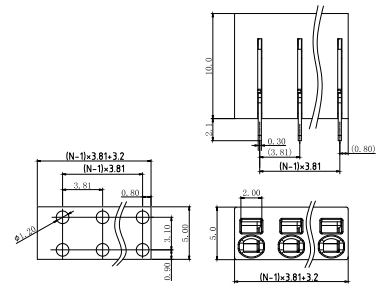

Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	18-24
Stranded wire(AWG):	18-24
Torque(Lb-In) :	


Wire strip length:	6±0.5mm For AWG 20-24 7.5±0.5mm For AWG 18
Withstanding Voltage:	2.0KV
Safety Approval:	

Pin-Plugs Pluggable System

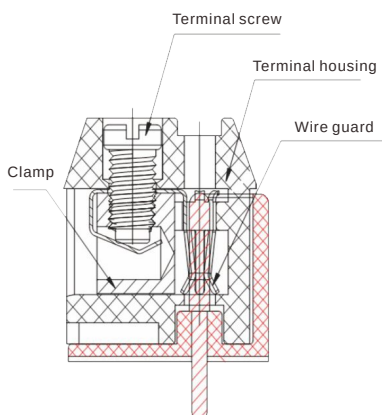


Pitch: 3.5, 3.81, 5.0, 5.75, 8.0
Rated Voltage Range(cULus): 150V-300V
Rated Current Range(cULus): 2A-15A

EH




Pitch 3.5mm
Poles 2p/3p
EHxx21600000G*
Number of poles

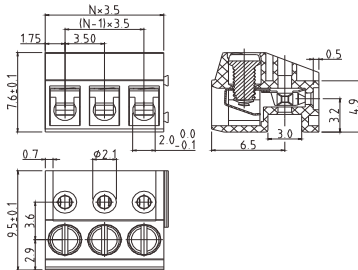


Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.1

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.3KV
Safety Approval:	

TH




Pitch 3.5mm
Poles 2p/3p
THxx21500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TH




Pitch 3.5mm
Solid Block
Poles 4p~24p
THxx21510000G*
Number of poles

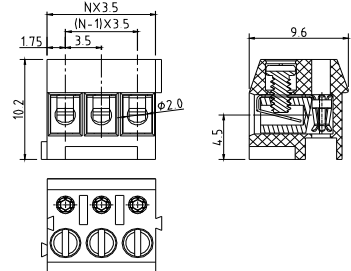


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TH




Pitch 3.81mm
Poles 2p/3p
THxx41500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TH




Pitch 3.81mm
Solid Block
Poles 4p~24p
THxx41510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TH




Pitch 5.0mm
Poles 2p/3p
THxx01600000G*
Number of poles

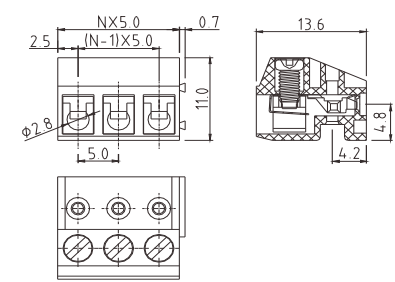


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	12A	15A
Wire range:	0.34-1.5mm ² 0.34-1.5mm ²		
Solid wire(AWG):	14-22		
Stranded wire(AWG):	14-22		
Torque :	3.5Lb-In	0.4N.m	0.4N.m

Screw:	M2.6		
Wire strip length:	5-6mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

TH




Pitch 5.0mm
Solid Block
Poles 4p~24p
THxx01010000G*
Number of poles

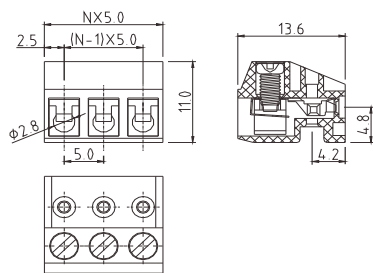


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	12A	15A
Wire range:	0.34-1.5mm ²		0.34-1.5mm ²
Solid wire(AWG):	14-22		
Stranded wire(AWG):	14-22		
Torque :	3.5Lb-In	0.4N.m	0.4N.m

Screw:	M2.6		
Wire strip length:	5-6mm		
Withstanding Voltage: 1.6KV	2.5KV	2.5KV	
Safety Approval:			

XD




Pitch 5.0mm
Poles 2p~12p
XDxx70500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	320V
Current rating:	8A	10A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	14-26	
Stranded wire(AWG):	14-26	
Torque(Lb-In)		

Screw:		
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	4KV
Safety Approval:		

TT




Pitch 3.5/3.81mm
Poles 2p/3p/4p
TT_{xx}2/41500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	CE RoHS

TT




Pitch 5.0mm
Poles 2p/3p
TTxx01800000G*
Number of poles

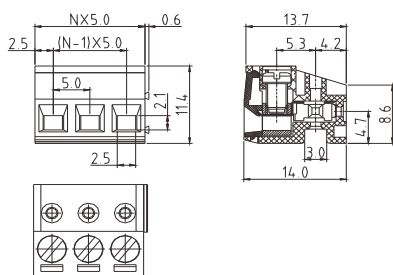


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-22
Torque(Lb-In) :	1.7

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	CE, RoHS

TT



Pitch 5.0mm
Solid Block
Poles 2p~24p
TTxx01810000G*
Number of poles

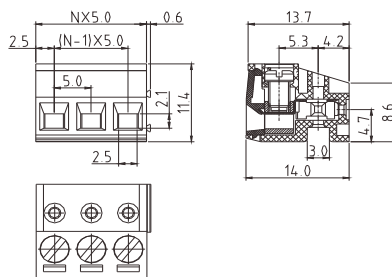


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-22
Torque(Lb-In) :	1.7

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	CE

TX




Pitch 5.0mm(Round hole)
Solid Block(TX/EX L=12.9mm)
Poles 2p~24p
TXxx01000000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Torque(Lb-In) :	3.5

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	CE

TX



Pitch 5.0mm(Square hole)
Solid Block
Poles 2p~24p
TXxx03000000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Torque(Lb-In) :	3.9

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TY



Pitch 5.0mm
Solid Block
Poles 2p~24p
TYxx01000000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	10A	10A
Wire range:		0.2-2.5mm ²
Solid wire(AWG):	14-26	
Stranded wire(AWG):	14-26	
Torque:	3.5Lb-In	0.4N.m

Screw:	M2.6
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

KR



Pitch 5.0mm-Without hook
Poles 2p~24p
KRxx01000000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Torque(Lb-In) :	3.5

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KR



Pitch 5.0mm-With hook
Poles 2p~24p
KRxx01010000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Torque(Lb-In) :	3.5

Screw:	M2.6
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EO




Pitch 5.0mm-Solid block
Poles 2p~24p
EO with two beam contact /EPΦ1.0mm
EO with six finger contact/EX L=16.0mm
EOxx01000000G/EOxx01020000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.5

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

EO




Pitch 5.0mm
High type
Poles 2p~24p
EOxx0102A000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Torque(Lb-In) :	4.5

Screw:	M3
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NY




Pitch 3.5mm-Without cover
Poles 2p~24p
NYxx1080000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	2A
Wire range:	
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-22
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

NY




Pitch 3.5mm-With cover
Poles 2p~24p
NYxx10810000G*
Number of poles

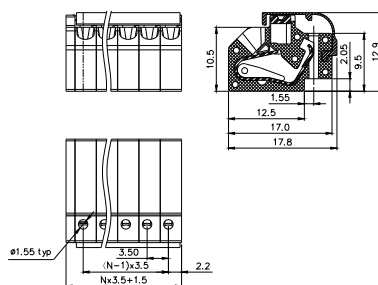


Electrical:	cULus
Voltage rating:	150V
Current rating:	2A
Wire range:	
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-22
Wire strip length:	9-10mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

NU




Pitch 3.5mm
Poles 1p~24p
NUxx00x0xxxxG*
Number of poles

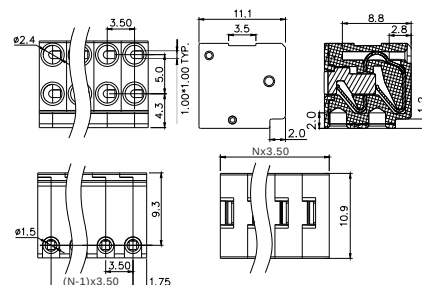


Electrical:	cULus
Voltage rating:	300V
Current rating:	2A
Wire range:	
Solid wire(AWG):	2*(20-26)
Wire strip length:	5-6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NS




Pitch 5.75mm
Solid block with hole
Poles 1p-4p
NSxx00x0xxxxG*
Number of poles

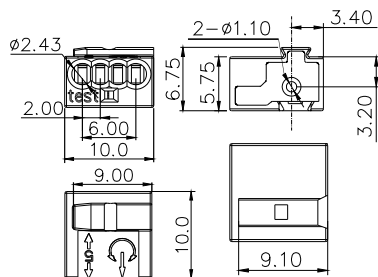


Electrical:	cULus	TUV
Voltage rating:	150V	130V
Current rating:	7A	9A
Wire range:		
Solid wire(AWG):	18-22	0.34-0.75mm ²

Wire strip length:	5-6mm	
Withstanding Voltage:	1.3KV	1.25KV
Safety Approval:		

NS




Pitch 5.75mm
Solid block without hole
Poles 1p-4p
NSxx00x1xxxxG*
Number of poles

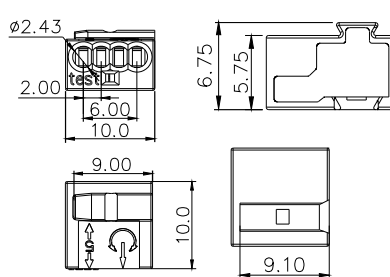


Electrical:	cULus	TUV
Voltage rating:	150V	130V
Current rating:	7A	9A
Wire range:		
Solid wire(AWG):	18-22	0.34-0.75mm ²

Wire strip length:	5-6mm	
Withstanding Voltage:	1.3KV	1.25KV
Safety Approval:		

WQ-15



Pitch 5.0mm
(Match FW 5.0)
Poles 1p~12p
WQ0015xx8000G*
Number of poles

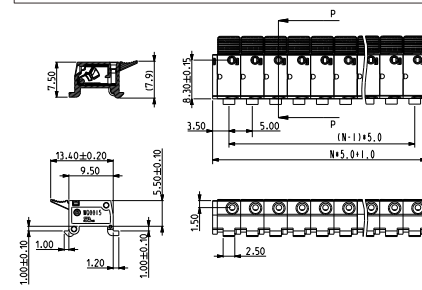


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-24
Stranded wire(AWG):	
Wire strip length:	6.5mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

GA-001




Pitch 5.0mm
(Match GW 5.0)
Poles 1p~24p
GA001xx0000G*
Number of poles

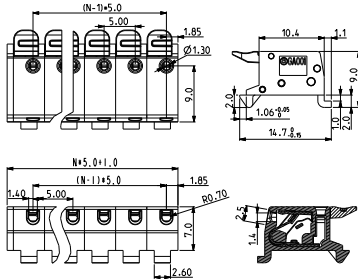


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-24
Stranded wire(AWG):	18-24
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

GB-001



Pitch 5.0mm
(Match FW 5.0)
Poles 1p~12p
GB001xx0x000G* Without Switch
GB001xx1x000G* With Switch
Number of poles

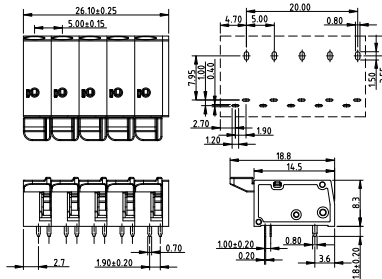


Electrical:	cULus
Voltage rating:	300V(Without Switch) 150V(With Switch)
Current rating:	6A
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-22
Wire strip length:	8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

OL




Pitch 3.5mm
Poles 2p~24p
OLxx10000000G* DIP type
Number of poles

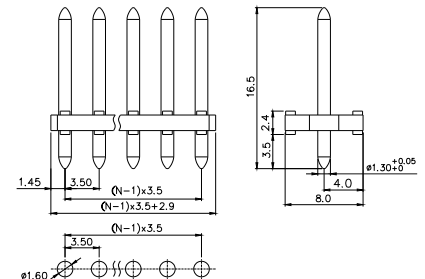


Electrical:	cULus
Voltage rating:	150V
Current rating:	2A
Withstanding Voltage:	1.3KV
Safety Approval:	(cULus) pending

OP



Pitch 3.5mm
Poles 2p~24p
(EH/OP $\phi 1.0$ mm)
OPxx2B010000G*
Number of poles

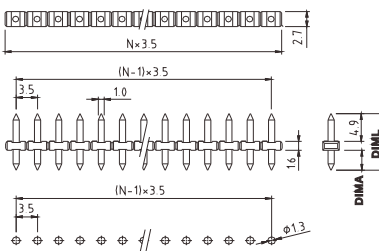


(See Order Instruction page J30)

Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

OP



Pitch 3.5mm
Poles 2p~24p
OPxx22000000G*
Number of poles




(See Order Instruction page J30)

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

OP




Pitch 3.5mm
Poles 2p~24p
(NU/OP $\phi 1.0$ mm)
OPxx220100M0G*
Number of poles




(See Order Instruction page J30)

Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EX




Pitch 5.0mm
(Match TX 5.0)
Poles 2p~24p
EXxx00000000G*
Number of poles

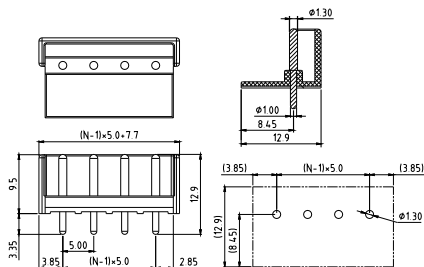


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Withstanding Voltage: 1.6KV
Safety Approval:

EX




Pitch 5.0mm
(Match EO 5.0 high type)
Poles 2p~24p
EXxx000xA000G*
Number of poles

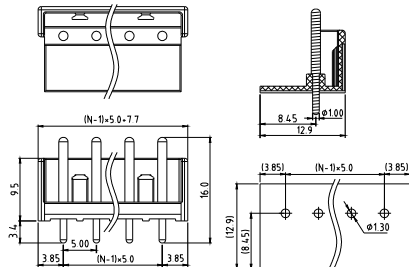


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Withstanding Voltage: 1.6KV
Safety Approval:

KG



Pitch 5.0(Match TH 5.0 and TT 5.0)
Poles 2p~24p
KGxx00800000G*
Number of poles

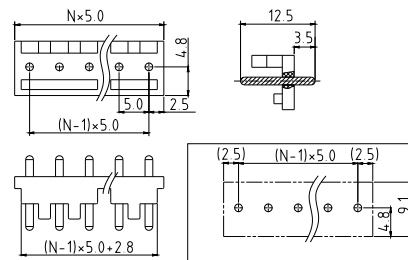


Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Withstanding Voltage: 1.6KV
Safety Approval: ()pending

FW




Pitch 5.0 mm
(Match GB001 5.0)
With cover SMT type
Poles 2p~12p
FWxx00010000G*
Number of poles

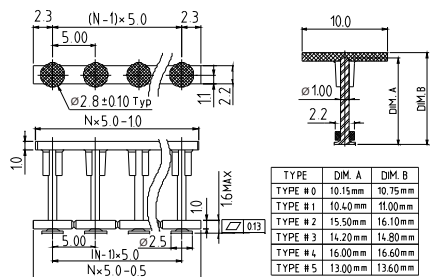


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Withstanding Voltage: 1.6KV
Safety Approval:

PF



Pitch 5.08 mm
Poles 2p~8p
PFxx00000000G*
Number of poles

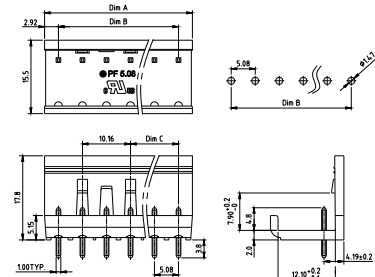


Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Withstanding Voltage: 1.6KV
Safety Approval:

GW




Pitch 5.0mm
(Match GA001 5.0)
Poles 2p~12p
GWxx08000000G*
Number of poles

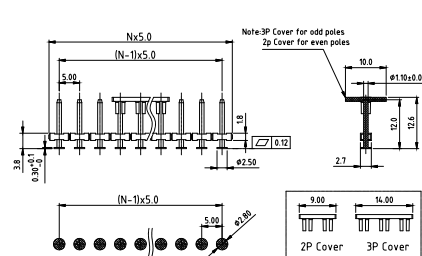


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Withstanding Voltage: 1.6KV
Safety Approval:

Socket for Pluggable System

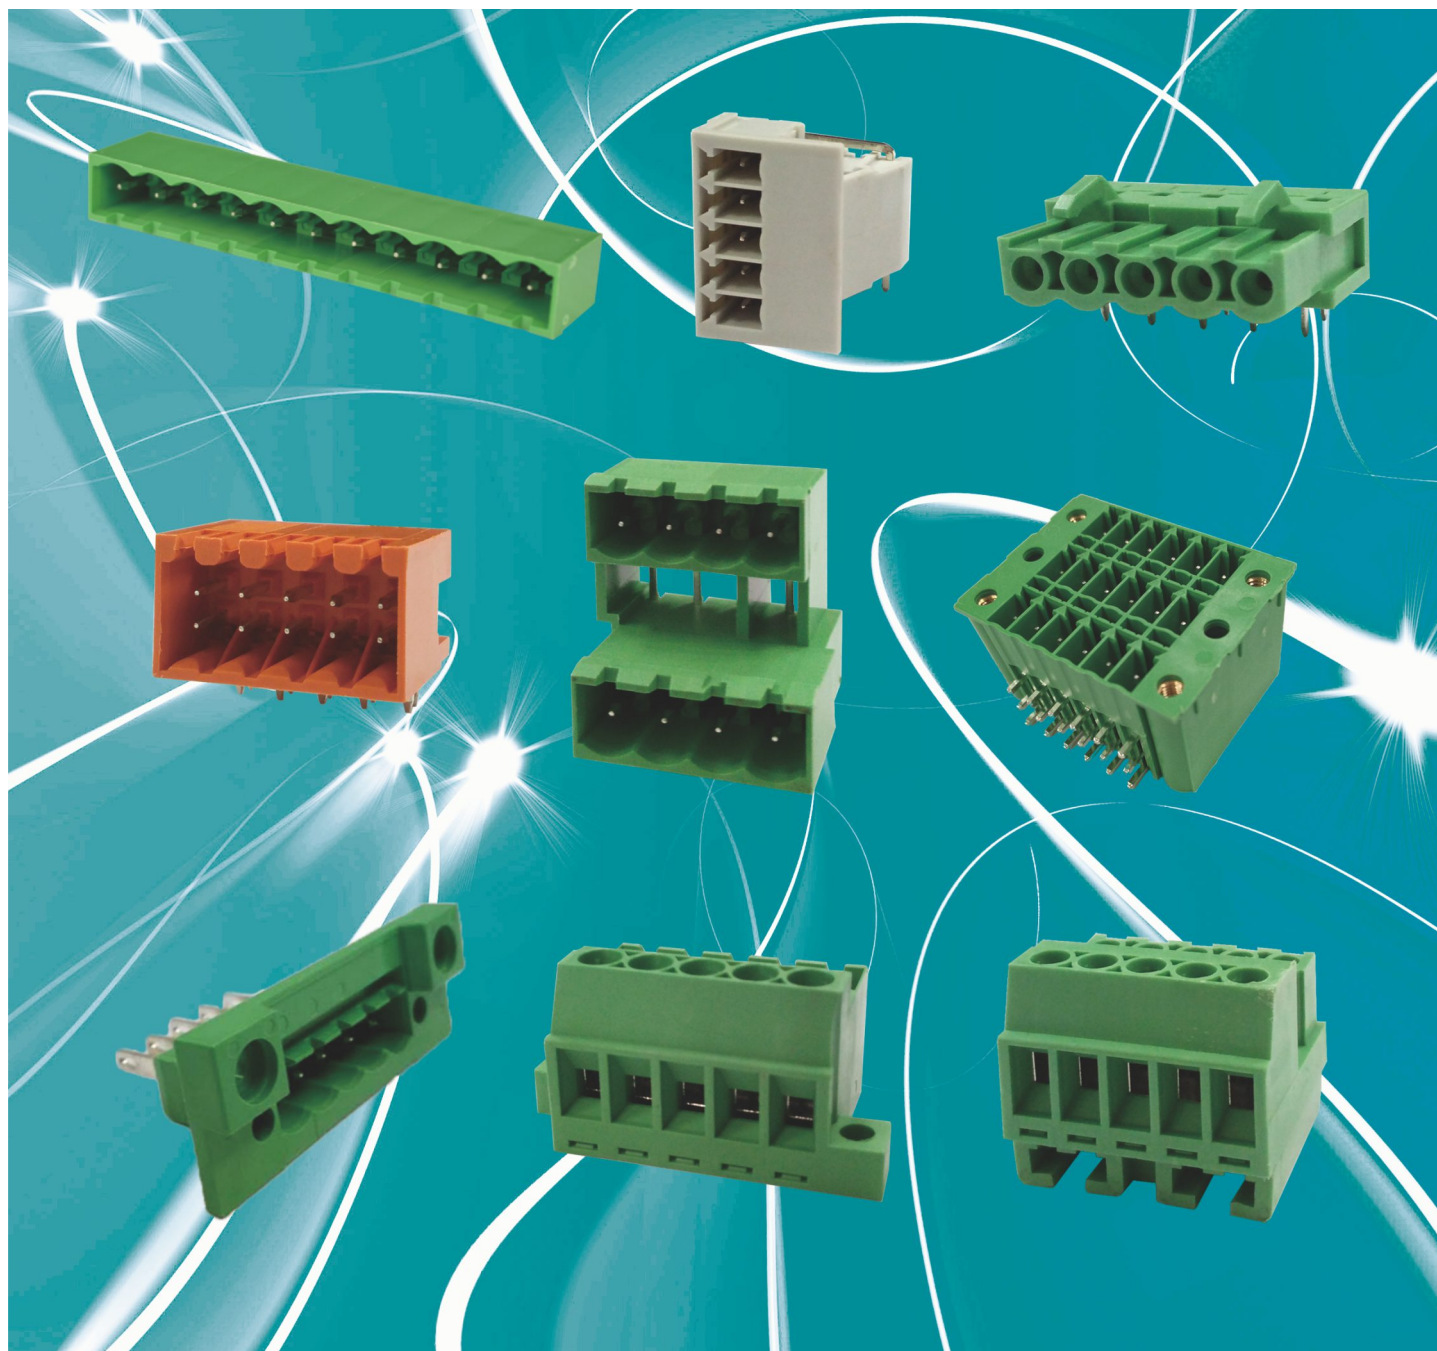

E

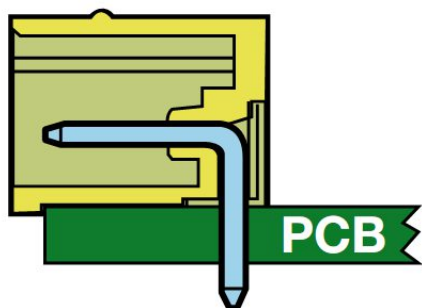


Pitch: 2.5, 2.54, 3.5, 3.81, 5.0, 5.08, 6.35, 7.5, 7.62, 10.16, 15.0


Rated Voltage Range(cULus) :150V-600V

Rated Current Range(cULus): 4A-115A

OQ




Pitch 2.5mm
Vertical
Poles 2p~24p
OQxxB1500000G*
Number of poles

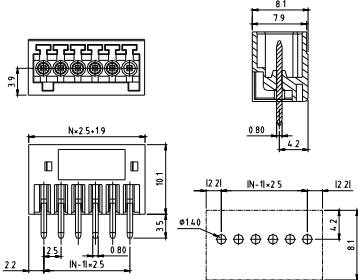


Electrical: cULus
Voltage rating: 150V
Current rating: 4A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval:

OQ




Pitch 2.5mm
Right angle
Poles 2p~24p
OQxxB1510000G*
Number of poles

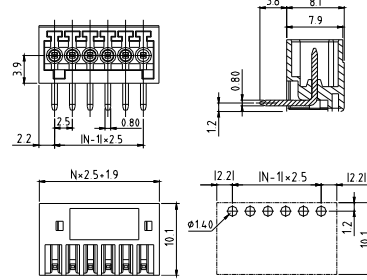


Electrical: cULus
Voltage rating: 150V
Current rating: 4A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval:

OQ




Pitch 2.54mm
Vertical, W/F, THT type
Poles 2p~16p
OQxxC15x0000G*
Number of poles

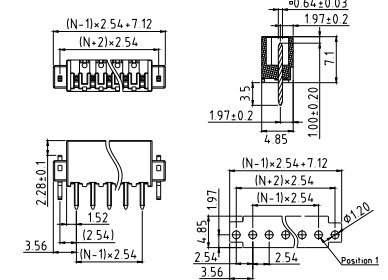


Electrical: cULus
Voltage rating: 150V
Current rating: 6A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval:

OQ




Pitch 2.54mm
Right angle, W/F, THT type
Poles 2p~16p
OQxxC15x0000G*
Number of poles

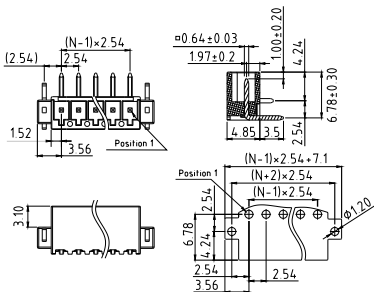


Electrical: cULus
Voltage rating: 150V
Current rating: 6A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval:

OQ




Pitch 3.5mm
Vertical
Poles 2p~24p
OQxx12500000G*
Number of poles

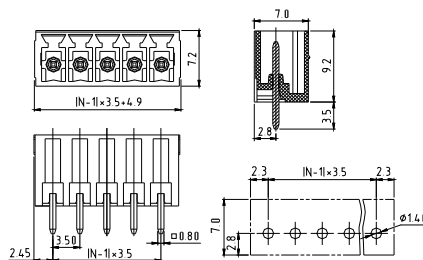


Electrical: cULus VDE
Voltage rating: 300V 300V
Current rating: 10A 10.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Rated Impulse Voltage: 2.5KV
Withstanding Voltage: 1.6KV
Safety Approval:

OQ




Pitch 3.5mm-W/F
Vertical
Poles 2p~24p
OQxx15500000G*
Number of poles

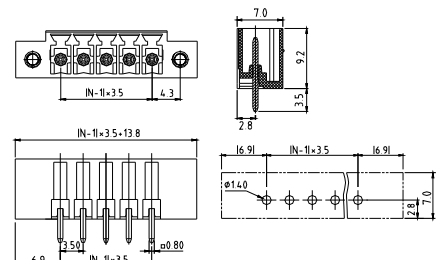


Electrical: cULus VDE
Voltage rating: 300V 300V
Current rating: 10A 10.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Rated Impulse Voltage: 2.5KV
Withstanding Voltage: 1.6KV
Safety Approval:

OQ




Pitch 3.5mm
Right angle
Poles 2p~24p
OQxx12510000G*
Number of poles

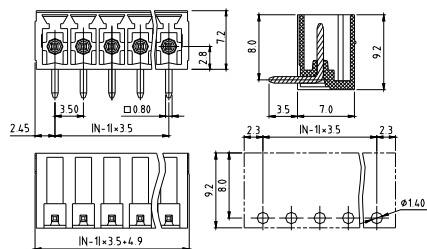


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage: 1.6KV	
Safety Approval:	cULus VDE

OQ




Pitch 3.5mm-W/F
Right angle
Poles 2p~24p
OQxx15510000G*
Number of poles

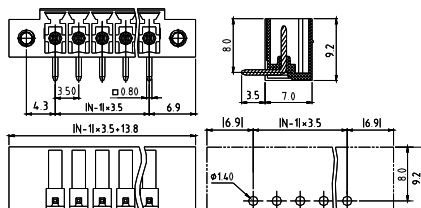


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage: 1.6KV	
Safety Approval:	cULus VDE

OQ




Pitch 3.5mm-Vertical
With latch holder
Poles 2p~24p
OQxx17500000G*
Number of poles

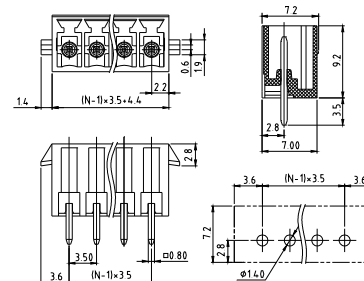


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage: 1.6KV	
Safety Approval:	cULus VDE

OQ




Pitch 3.5mm-Right angle
With latch holder
Poles 2p~24p
OQxx17510000G*
Number of poles

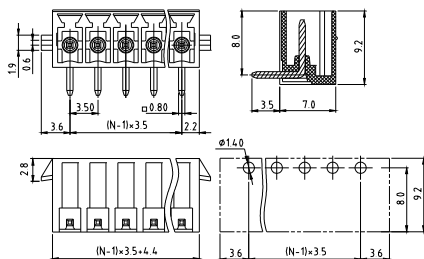


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage: 1.6KV	
Safety Approval:	cULus VDE

OQ




Pitch 3.81mm
Vertical
Poles 2p~24p
OQxx32500000G*
Number of poles

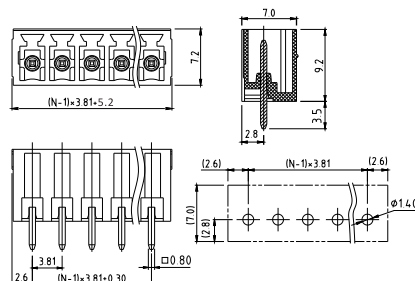


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage: 1.6KV	
Safety Approval:	cULus VDE

OQ




Pitch 3.81mm-W/F
Vertical
Poles 2p~24p
OQxx35500000G*
Number of poles

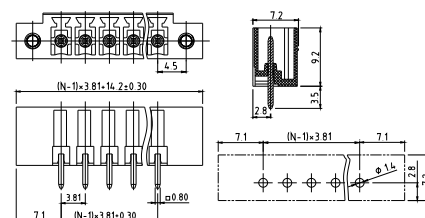


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage: 1.6KV	
Safety Approval:	cULus VDE

OQ




Pitch 3.81mm
Right angle
Poles 2p~24p
OQxx32510000G*
Number of poles

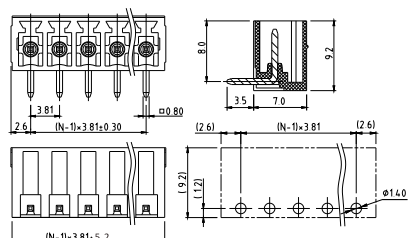


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage:1.6KV	
Safety Approval:	

OQ




Pitch 3.81mm-W/F
Right angle
Poles 2p~24p
OQxx35510000G*
Number of poles

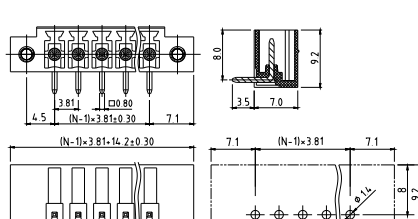


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage:1.6KV	
Safety Approval:	

OQ




Pitch 5.0mm
Right angle, With latch holder
Poles 2p~24p
OQxx77510000G*
Number of poles

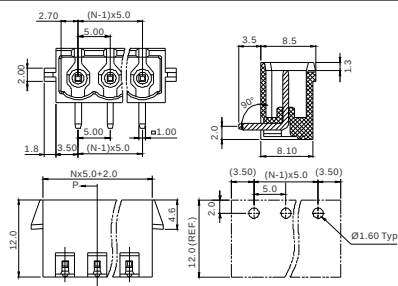


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm
Vertical, With latch holder
Poles 2p~24p
OQxx77500000G*
Number of poles

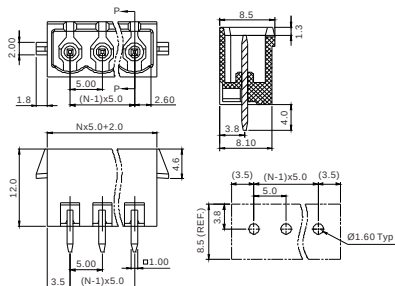


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm
Vertical, Close
Poles 2p~24p
OQxx71500000G*
Number of poles

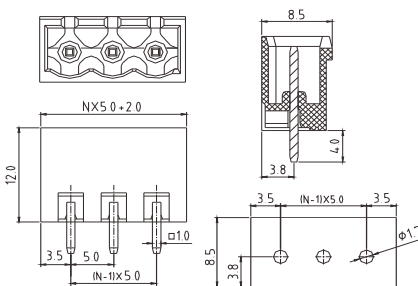


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm-W/F
Vertical
Poles 2p~24p
OQxx77500000G*
Number of poles

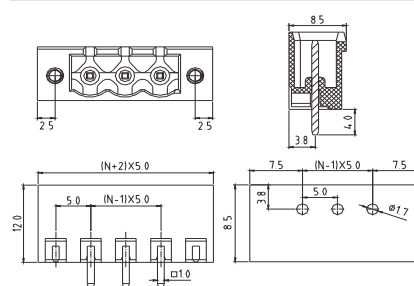


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm
Vertical, Open
Poles 2p~24p
OQxx7050000G*
Number of poles

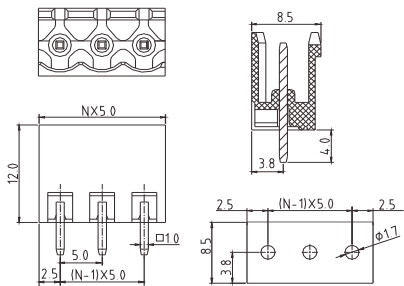


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm
Right angle
Poles 2p~24p
OQxx71510000G*
Number of poles

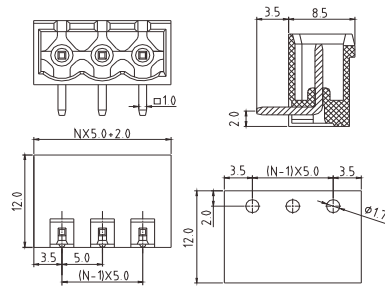


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm-W/F
Right angle
Poles 2p~24p
OQxx75510000G*
Number of poles

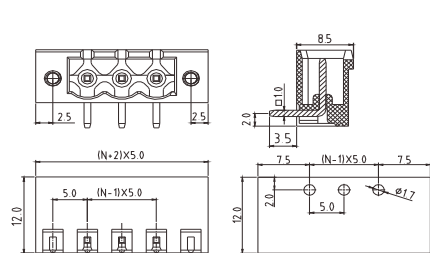


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm
Right angle, Open
Poles 2p~24p
OQxx70510000G*
Number of poles

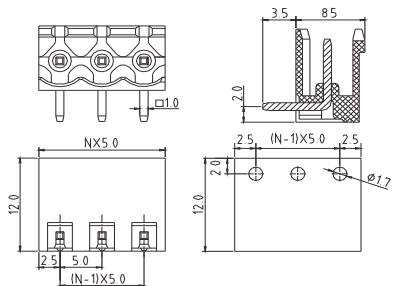


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:		 

OQ




Pitch 5.0mm
(Right angle, With flange)
Body reverse
Poles 2p~16p
OQxx755AxxxxG*
Number of poles

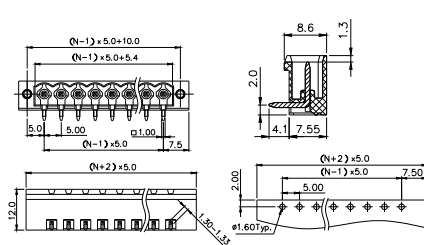


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	20A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage:	1.6KV
Safety Approval:	 

OQ




Pitch 5.08mm
(Right angle, With flange)
Body reverse
Poles 2p~24p
OQxx555AxxxxG*
Number of poles

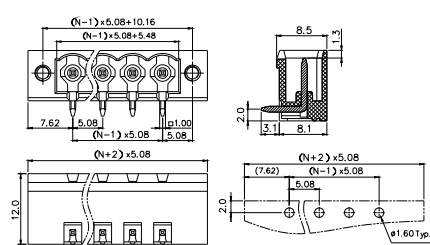


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	20A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage:	1.6KV
Safety Approval:	 

OQ




Pitch 5.08mm(Right angle, Close)
Body reverse
Poles 2p~24p
OQxx545AxxxxG*
Number of poles

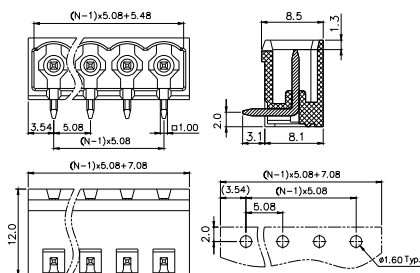


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	20A	20A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	2.5KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TÜV

OQ




Pitch 5.08mm
Vertical, Close
Poles 2p~24p
OQxx5450000G*
Number of poles

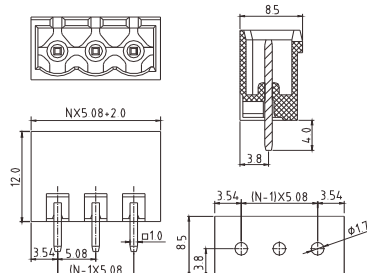


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus VDE TÜV	

OQ




Pitch 5.08mm-W/F
Vertical
Poles 2p~24p
OQxx5550000G*
Number of poles

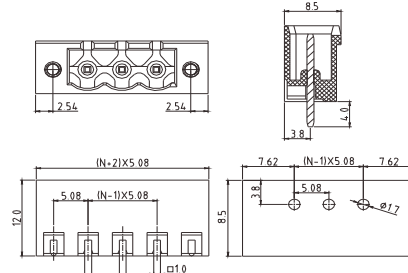


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus VDE TÜV	

OQ




Pitch 5.08mm
Vertical, Open
Poles 2p~24p
OQxx5350000G*
Number of poles

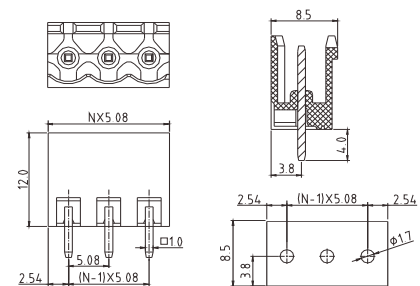


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus VDE TÜV	

OQ




Pitch 5.08mm
Right angle, Close
Poles 2p~24p
OQxx54510000G*
Number of poles

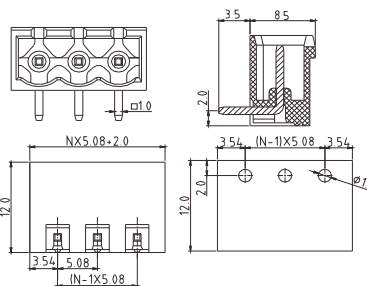


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus VDE TÜV	

OQ




Pitch 5.08mm-W/F
Right angle
Poles 2p~24p
OQxx55510000G*
Number of poles

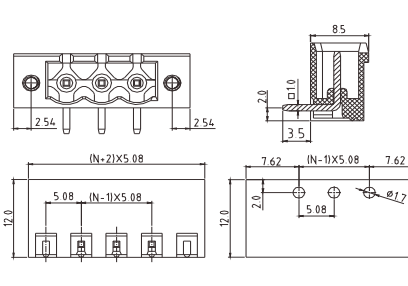


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus VDE TÜV	

OQ




Pitch 5.08mm
Right angle, Open
Poles 2p~24p
OQxx53510000G*
Number of poles

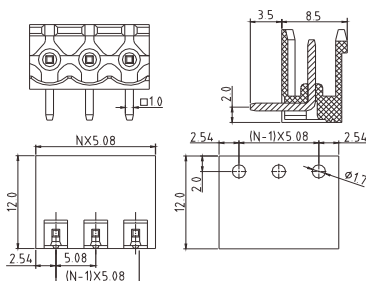


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:1.6KV		
Safety Approval:		 

OQ




Pitch 5.08mm-Vertical
With latch holder
Poles 2p~24p
OQxx57500000G*
Number of poles

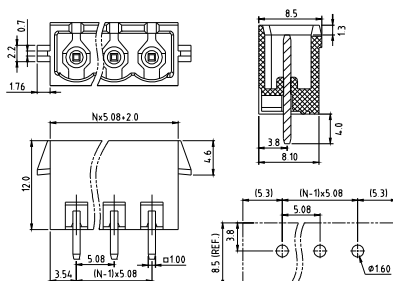


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:1.6KV		
Safety Approval:		 

OQ




Pitch 5.08mm-Right angle
With latch holder
Poles 2p~24p
OQxx57510000G*
Number of poles

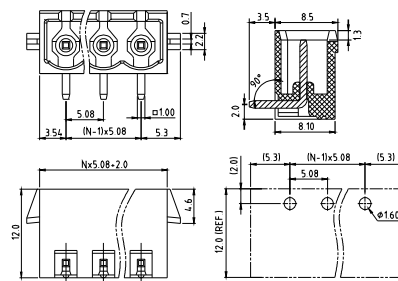


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	20A	20A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Rated Impulse Voltage:	2.5KV	2.5KV
Withstanding Voltage:1.6KV		
Safety Approval:		 

OQ




Pitch 7.5mm
Vertical, Close
Poles 2p~16p
OQxxA1500000G*
Number of poles

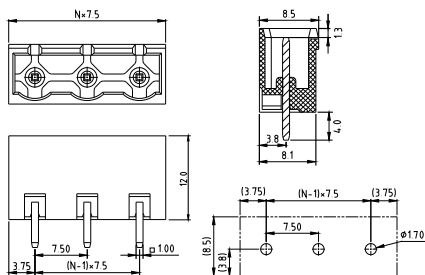


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage: 1.6KV	
Safety Approval:	 

OQ




Pitch 7.5mm-W/F
Vertical
Poles 2p~16p
OQxxA5500000G*
Number of poles

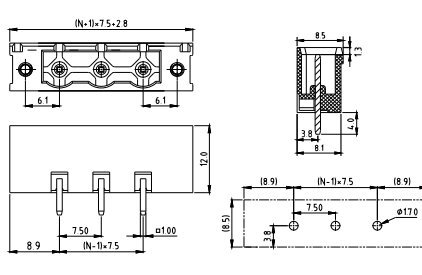


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage: 1.6KV	
Safety Approval:	 

OQ




Pitch 7.5mm
Vertical, Open
Poles 2p~16p
OQxxA0500000G*
Number of poles

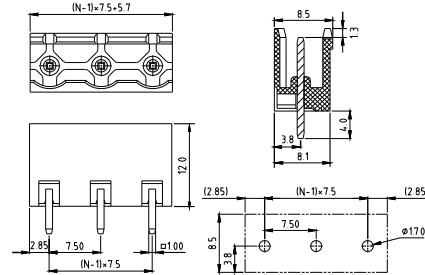


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage: 1.6KV	
Safety Approval:	 

OQ




Pitch 7.5mm
Right angle
Poles 2p~16p
OQxxA1510000G*
Number of poles

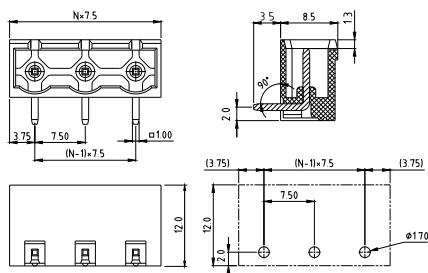


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TUV

OQ




Pitch 7.5mm-W/F
Right angle
Poles 2p~16p
OQxxA5510000G*
Number of poles

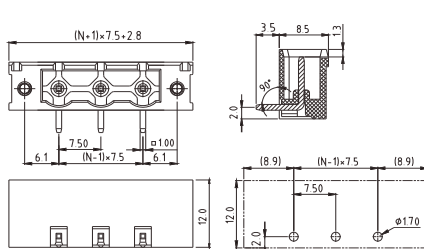


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TUV

OQ




Pitch 7.5mm
Right angle, Open
Poles 2p~16p
OQxxA0510000G*
Number of poles

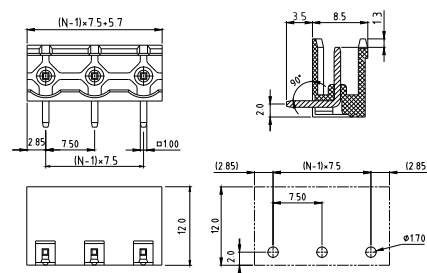


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TUV

OQ




Pitch 7.62mm
Vertical, Close
Poles 2p~16p
OQxx01500000G*
Number of poles

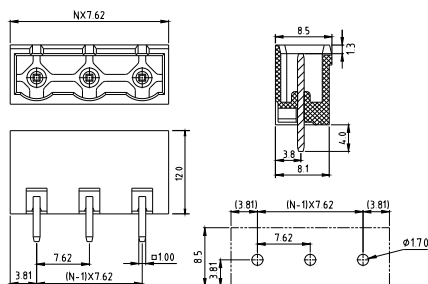


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TUV

OQ




Pitch 7.62mm-W/F
Vertical
Poles 2p~16p
OQxx05500000G*
Number of poles

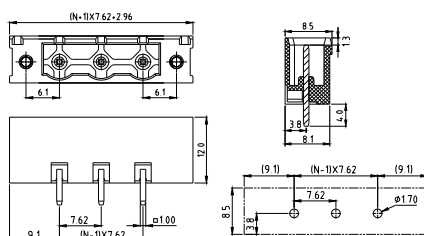


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TUV

OQ




Pitch 7.62mm
Vertical, Open
Poles 2p~16p
OQxx00500000G*
Number of poles

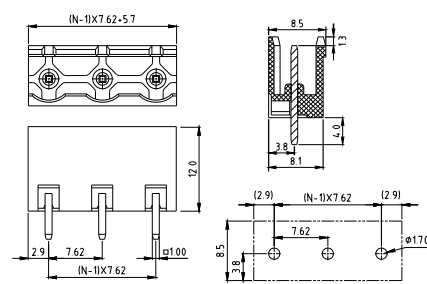


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus TUV

OQ




Pitch 7.62mm
Right angle, Close
Poles 2p~16p
OQxx01510000G*
Number of poles

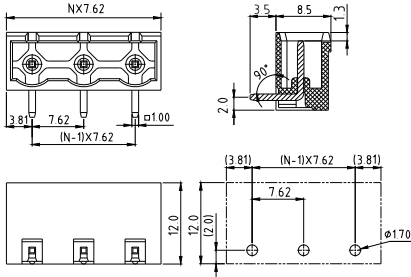


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	

OQ




Pitch 7.62mm-W/F
Right angle
Poles 2p~16p
OQxx05510000G*
Number of poles

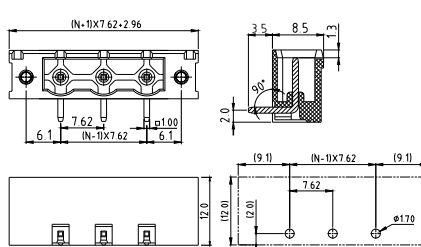


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	

OQ




Pitch 7.62mm
Right angle, Open
Poles 2p~16p
OQxx00510000G*
Number of poles

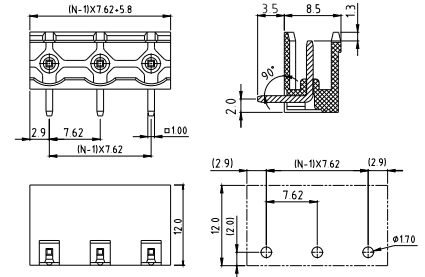


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	20A	15A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	

OQ




Pitch 7.62mm
Right angle, Close
Body reverse
Poles 2p~16p
OQxx015AxxxxG*
Number of poles

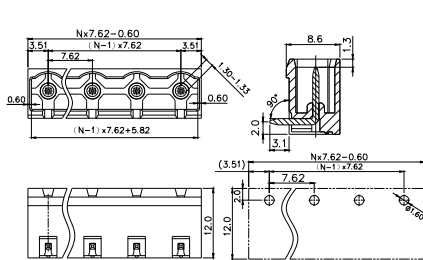


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.6KV
Safety Approval:	

OQ




Pitch 2.54mm
Vertical, W/F, W/cover, SMT type
Poles 2p~16p
OQxxCE0xB000G*
Number of poles

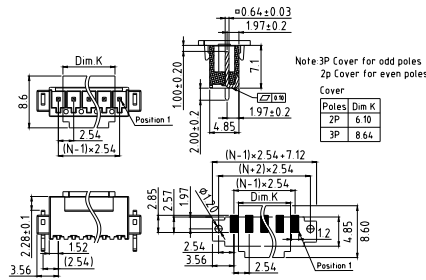


Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.3KV
Safety Approval:	

OQ




Pitch 2.54mm
Right angle, W/F, SMT type
Poles 2p~16p
OQxxCE0xB000G*
Number of poles

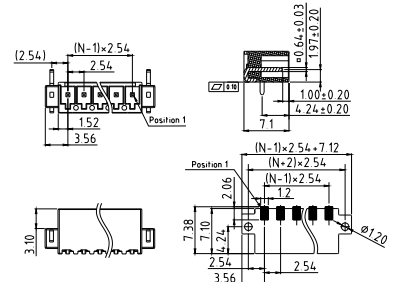


Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	

Withstanding Voltage:	1.3KV
Safety Approval:	

OQ




Pitch 3.5/3.81 mm
With cover, SMT type
Poles 2p~16p
OQxx1/3500D000G*
Number of poles

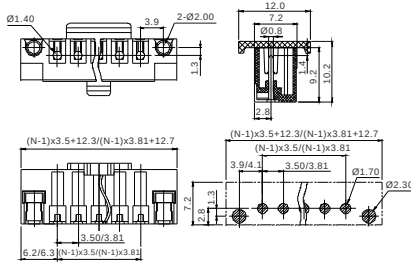


Electrical: cULus
Voltage rating: 150V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: (cULus) pending

OQ




Pitch 2.5mm
Vertical, Close, THR type
Poles 2p~16p
OQxxBE000000G*
Number of poles

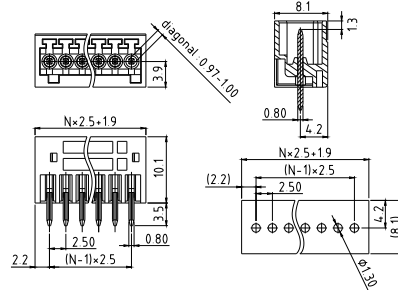


Electrical: cULus
Voltage rating: 150V
Current rating: 4A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

OQ




Pitch 2.5mm
Right angle, Close, THR type
Poles 2p~16p
OQxxBE010000G*
Number of poles

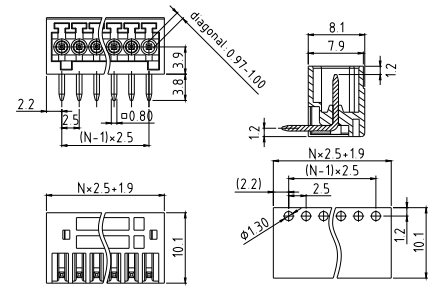


Electrical: cULus
Voltage rating: 150V
Current rating: 4A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

OQ




Pitch 2.54mm
Vertical, W/F, W/cover, THR type
Poles 2p~16p
OQxxCE0xB000G*
Number of poles

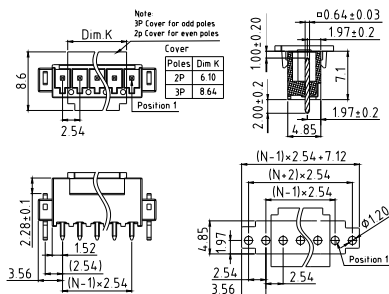


Electrical: cULus
Voltage rating: 150V
Current rating: 6A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

OQ




Pitch 2.54mm
Right angle, W/F, THR type
Poles 2p~16p
OQxxCE0xB000G*
Number of poles

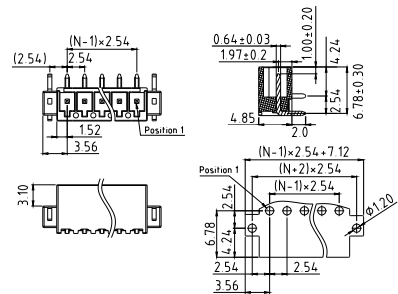


Electrical: cULus
Voltage rating: 150V
Current rating: 6A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

OQ




Pitch 3.5mm
Vertical, Close, THR type, W/cover
Note: 3p cover for odd poles, 2p cover for even poles
Poles 2~16p
OQxx1G00B000G*
Number of poles

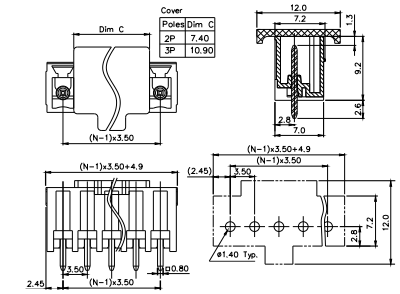

Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

OQ



Pitch 3.5mm


Vertical, W/F, THR type, W/cover

Note: 3p cover for odd poles, 2p cover for even poles

Poles 2p~16p

OQxx1H00B000G*

Number of poles

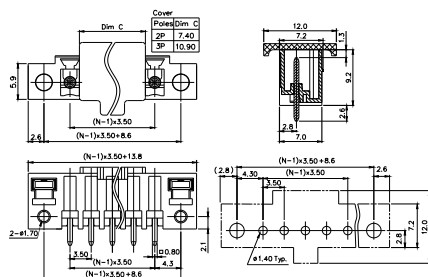

Electrical:

cULus

Voltage rating:

300V

Current rating:

10A

Wire range:

Solid wire(AWG):

Stranded wire(AWG):

Withstanding Voltage:

1.6KV

Safety Approval:

cULus

OQ




Pitch 3.5mm

Right angle, Close, THR type

Poles 2p~16p

OQxx1G01B000G*

Number of poles

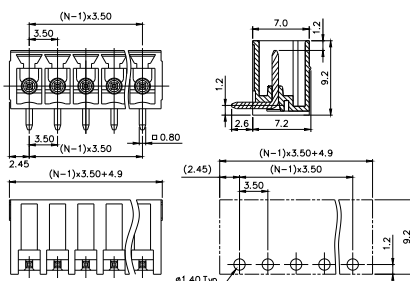

Electrical:

cULus

Voltage rating:

300V

Current rating:

10A

Wire range:

Solid wire(AWG):

Stranded wire(AWG):


Withstanding Voltage:

1.6KV

Safety Approval:

cULus

OQ




Pitch 3.5mm

Right angle, W/F, THR type

Poles 2p~16p

OQxx1H01B000G*

Number of poles

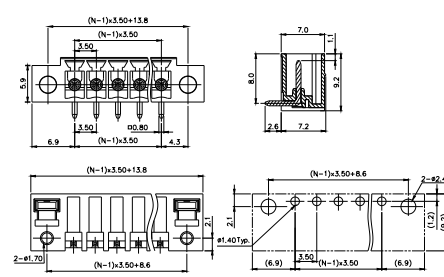

Electrical:

cULus

Voltage rating:

300V

Current rating:

10A

Wire range:

Solid wire(AWG):

Stranded wire(AWG):

Withstanding Voltage:

1.6KV

Safety Approval:

cULus

OQ




Pitch 3.5mm

Body reverse

Poles 2p~12p

OQxx120A000G*

Number of poles

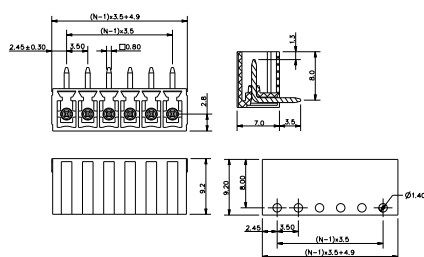

Electrical:

cULus

Voltage rating:

300V

Current rating:

10A

Wire range:

Solid wire(AWG):


Stranded wire(AWG):

Withstanding Voltage:

2.5KV

Safety Approval:

OQ



Pitch 3.81mm


Vertical, Close, THR type, W/cover

Note: 3p cover for odd poles, 2p cover for even poles

Poles 2p~16p

OQxx3G00B000G*

Number of poles

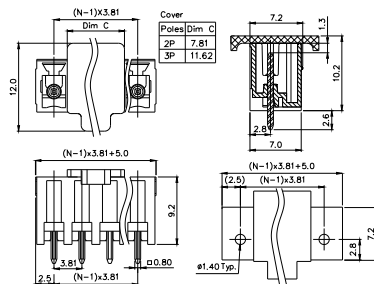

Electrical:

cULus

Voltage rating:

300V

Current rating:

10A

Wire range:

Solid wire(AWG):

Stranded wire(AWG):


Withstanding Voltage:

1.6KV

Safety Approval:

cULus

OQ



Pitch 3.81mm


Vertical, W/F, THR type, W/cover

Note: 3p cover for odd poles, 2p cover for even poles

Poles 2p~16p

OQxx3H00B000G*

Number of poles

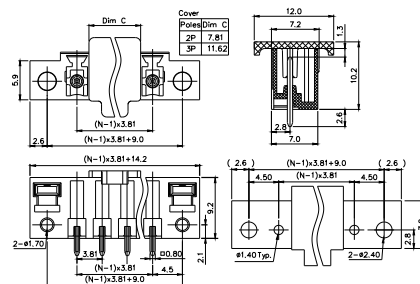

Electrical:

cULus

Voltage rating:

300V

Current rating:

10A

Wire range:

Solid wire(AWG):

Stranded wire(AWG):

Withstanding Voltage:

1.6KV


Safety Approval:

cULus

OQ




Pitch 3.81mm
Right angle, Close, THR type
Poles 2p~16p
OQxx3G01B000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

OQ




Pitch 3.81mm
Right angle, W/F, THR type
Poles 2p~16p
OQxx3H01B000G*
Number of poles

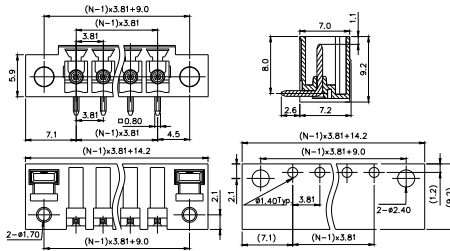


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

OQ




Pitch 5.08mm
Vertical, Close, THR type, W/cover
Note: 3p cover for odd poles, 2p cover for even poles
Poles 2p~12p
OQxx5E00B000G*
Number of poles

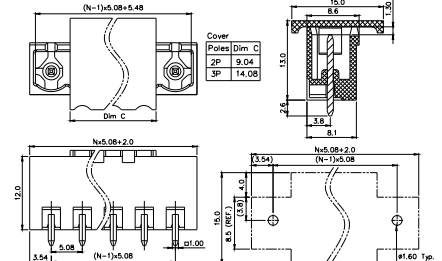


Electrical: cULus TUV
Voltage rating: 300V 300V
Current rating: 20A 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Rated Impulse Voltage: 2.5KV
Withstanding Voltage: 1.6KV
Safety Approval: cULus

OQ



Pitch 5.08mm
Vertical, W/F, THR type, W/cover
Note: 3p cover for odd poles, 2p cover for even poles
Poles 2p~12p
OQxx5F00B000G*
Number of poles

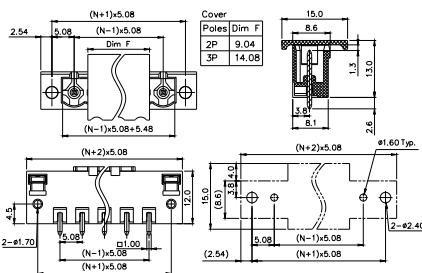


Electrical: cULus TUV
Voltage rating: 300V 300V
Current rating: 20A 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Rated Impulse Voltage: 2.5KV
Withstanding Voltage: 1.6KV
Safety Approval: cULus

OQ



Pitch 5.08mm
Right angle, Close, THR type
Poles 2p~12p
OQxx5E01B000G*
Number of poles

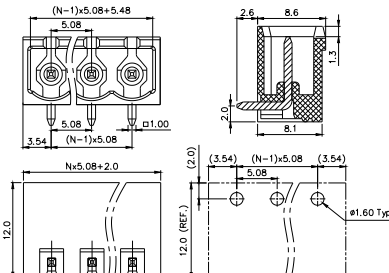


Electrical: cULus TUV
Voltage rating: 300V 300V
Current rating: 20A 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Rated Impulse Voltage: 2.5KV
Withstanding Voltage: 1.6KV
Safety Approval: cULus

OQ




Pitch 5.08mm
Right angle, W/F, THR type
Poles 2p~12p
OQxx5F01B000G*
Number of poles

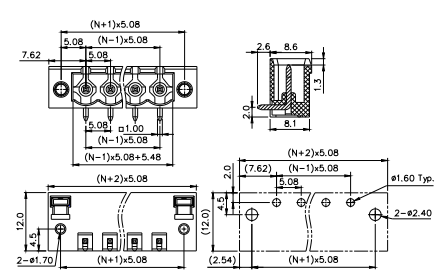


Electrical: cULus TUV
Voltage rating: 300V 300V
Current rating: 20A 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Rated Impulse Voltage: 2.5KV
Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 2.5mm
Close, Vertical
Poles 2*2p~2*24p
VLxxB1500000G*
Number of poles




Electrical: cULus
Voltage rating: 150V
Current rating: 4A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

VL




Pitch 2.5mm
Close, Right angle
Poles 2*2p~2*24p
VLxxB1500000G*
Number of poles




Electrical: cULus
Voltage rating: 150V
Current rating: 4A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

VL




Pitch 3.5mm
Close, Vertical
Poles 2*2p~2*24p
VLxxB1500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
Close, Right angle
Poles 2*2p~2*24p
VLxx11510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
W/F, Vertical
Poles 2*2p~2*24p
VLxx12500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
W/F, Right angle
Poles 2*2p~2*24p
VLxx12510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
Close, Vertical (B type)
Poles 2*2p~2*24p
VLxx13500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
Close, Right angle(B type)
Poles 2*2p~2*24p
VLxx13510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
W/F, Vertical(B type)
Poles 2*2p~2*24p
VLxx14500000G*
Number of poles

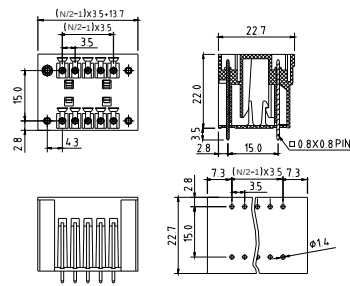


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.5mm
W/F, Right angle(B type)
Poles 2*2p~2*24p
VLxx14510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.81mm
Close, Vertical
Poles 2*2p~2*24p
VLxx31500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.81mm
Close, Right angle
Poles 2*2p~2*24p
VLxx31510000G*
Number of poles

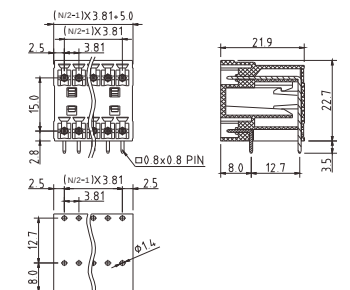


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 3.81mm
W/F, Vertical
Poles 2*2p~2*24p
VLxx32500000G*
Number of poles

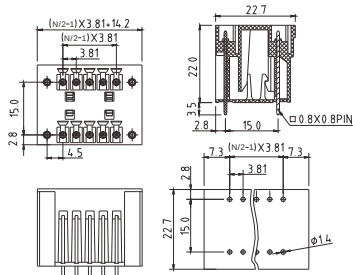


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VL




Pitch 3.81mm
W/F, Right angle
Poles 2*2p~2*24p
VLxx32510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VL



Pitch 5.0mm
Close, Vertical
Poles 2*2p~2*24p
VLxx71500000G*
Number of poles



Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):


E

Withstanding Voltage: 1.6KV
Safety Approval: cULus


Withstanding Voltage: 1.6KV
Safety Approval: cULus

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 5.0mm
W/F, Vertical
Poles 2*2p~2*24p
VLxx72500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VL




Pitch 5.0mm
Close, Right angle
Poles 2*2p~2*24p
VLxx71510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VL



Pitch 5.0mm
W/F, Right angle
Poles 2*2p~2*24p
VLxx72510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus


Withstanding Voltage: 1.6KV
Safety Approval: cULus

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 5.08mm
Close, Vertical
Poles 2*2p~2*24p
VLxx51500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL



Pitch 5.08mm
W/F, Vertical
Poles 2*2p~2*24p
VLxx52500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 5.08mm
Close, Right angle
Poles 2*2p~2*24p
VLxx51510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VL




Pitch 5.08mm
W/F, Right angle
Poles 2*2p~2*24p
VLxx52510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

EL




Pitch 3.5mm(Dip type)
Open, Vertical
Poles 2p~24p
ELxx11520000G*
Number of poles

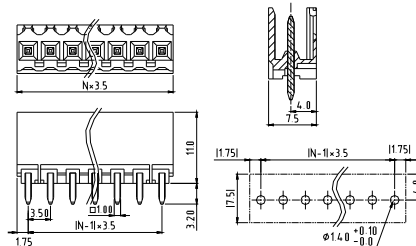


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EL




Pitch 3.5mm(Dip type)
Open, Right angle
Poles 2p~24p
ELxx11530000G*
Number of poles

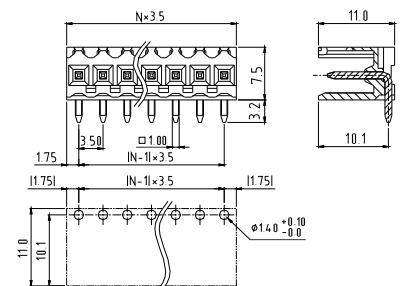


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EL




Pitch 3.5mm(Dip type)
Close, Vertical
Poles 2p~24p
ELxx12520000G*
Number of poles

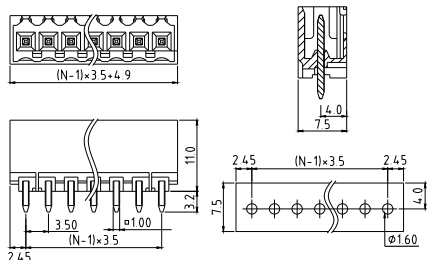


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EL




Pitch 3.5mm(Dip type)
Close, Right angle
Poles 2p~24p
ELxx12530000G*
Number of poles

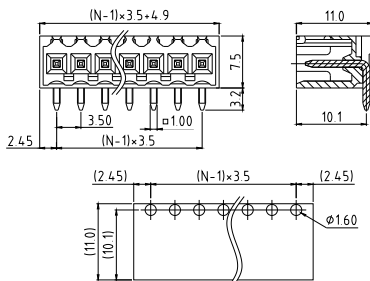


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EL




Pitch 3.5mm(Dip type)
W/F, Vertical
Poles 2p~24p
ELxx15520000G*
Number of poles

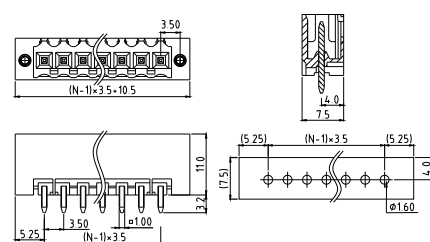


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EL




Pitch 3.5mm(Dip type)
W/F, Right angle
Poles 2p~24p
ELxx15530000G*
Number of poles

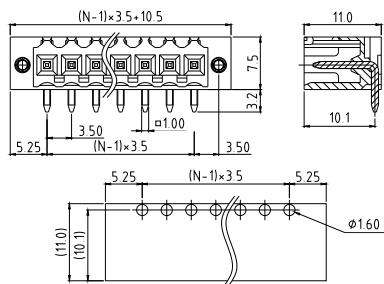


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EL



Pitch 3.5mm(THR type)
Open, Vertical
Poles 2p~24p
ELxx110A0000G*
Number of poles

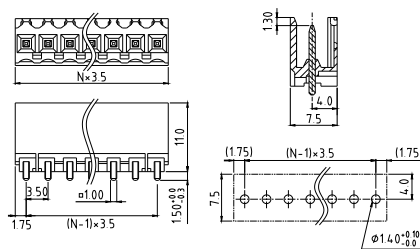


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EL




Pitch 3.5mm(THR type)
Open, Right angle
Poles 2p~24p
ELxx110B0000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EL



Pitch 3.5mm(THR type)
Close, Vertical
Poles 2p~24p
ELxx120A0000G*
Number of poles

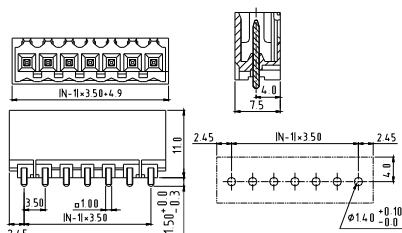


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EL




Pitch 3.5mm(THR type)
Close, Right angle
Poles 2p~24p
ELxx120B0000G*
Number of poles

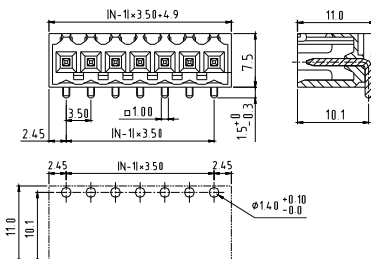


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EL



Pitch 3.5mm(THR type)
W/F, Vertical
Poles 2p~24p
ELxx150A0000G*
Number of poles

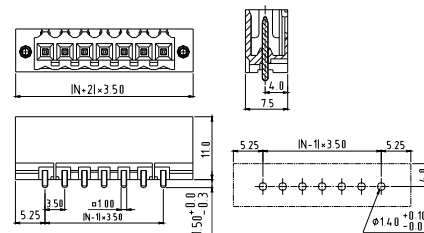


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EL




Pitch 3.5mm(THR type)
W/F, Right angle
Poles 2p~24p
ELxx150B0000G*
Number of poles

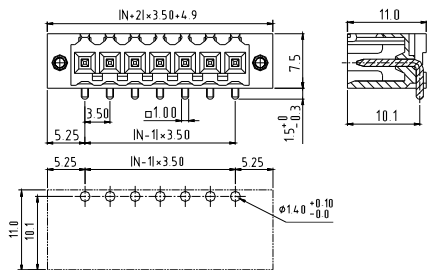


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

EU




Pitch 3.5mm(Right)
Poles 3p
EU0310800000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

EU



Pitch 3.5mm(Left)
Poles 3p
EU0310810000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

EU




Pitch 3.5mm(Right)
Poles 4p
EU0410800000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

EU




Pitch 3.5mm(Left)
Poles 4p
EU0410810000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

EU




Pitch 3.5mm(Right)
Poles 5p
EU0510800000G*

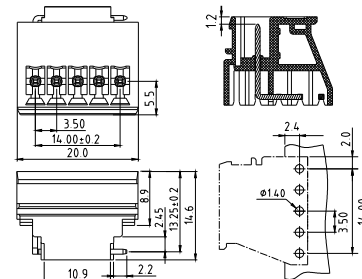


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

EU



Pitch 3.5mm(Left)
Poles 5p
EU0510810000G*

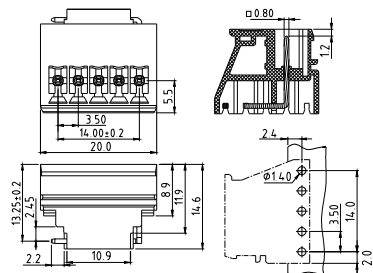


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (cULus) pending

EU




Pitch 5.0mm(Right)
Poles 2p
EU0270500000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

EU



Pitch 5.0mm(Left)
Poles 2p
EU0270510000G*

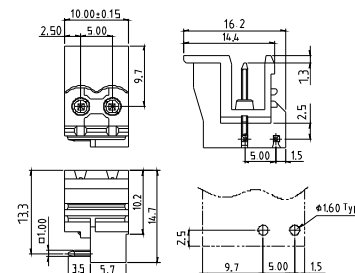


Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

EU




Pitch 5.0mm(Right)
Poles 3p
EU0370500000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval:

EU



Pitch 5.0mm(Left)
Poles 3p
EU0370510000G*




Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval:

EU




Pitch 5.0mm(Right)
Poles 4p
EU0470500000G*

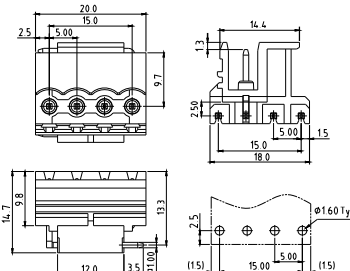


Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval:

EU




Pitch 5.0mm(Left)
Poles 4p
EU0470510000G*

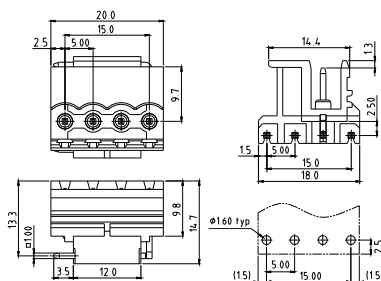


Electrical: cULus
Voltage rating: 300V
Current rating: 20A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval:

VK




Pitch 3.5mm
45D
Poles 2p~24p
VKxx11500000G*
Number of poles

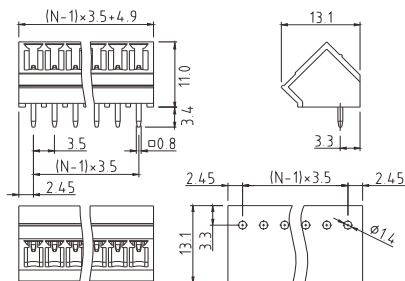


Electrical: cULus VDE
Voltage rating: 300V 300V
Current rating: 8A 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV 2.5KV
Safety Approval:

VK




Pitch 3.5mm-W/F
45D
Poles 2p~24p
VKxx12500000G*
Number of poles

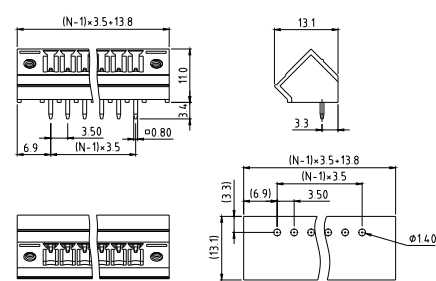


Electrical: cULus VDE
Voltage rating: 300V 300V
Current rating: 8A 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV 2.5KV
Safety Approval:

VK




Pitch 3.81mm
45D
Poles 2p~24p
VKxx31500000G*
Number of poles

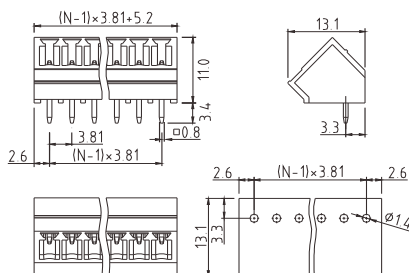


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VK




Pitch 3.81mm-W/F
45D
Poles 2p~24p
VKxx32500000G*
Number of poles

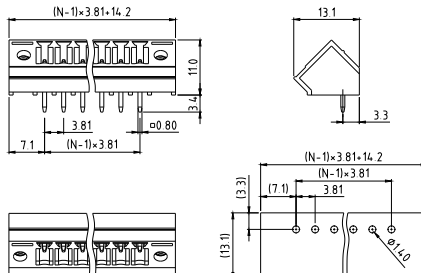


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VK




Pitch 5.0mm
45D, Close
Poles 2p~24p
VKxx71500000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

VK




Pitch 5.0mm
45D, With flange
Poles 2p~24p
VKxx72500000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

VK




Pitch 5.0mm
45D, Open
Poles 2p~24p
VKxx70500000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

VK




Pitch 5.08mm
45D, Close
Poles 2p~24p
VKxx51500000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

VK




Pitch 5.08mm
45D, With flange
Poles 2p~24p
VKxx52500000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:	cULus	VDE	TUV

VK




Pitch 5.08mm
45D, Open
Poles 2p~24p
VKxx50500000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	20A
Wire range:			
Solid wire(AWG):			
Stranded wire(AWG):			

Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:	cULus	VDE	TUV

V7




Pitch 3.5mm
Vertical
Poles 2p~24p
V7xx11500000G*
Number of poles

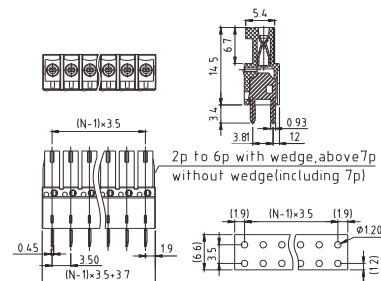


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V7




Pitch 3.5mm
Vertical, W/F
Poles 2p~24p
V7xx12500000G*
Number of poles

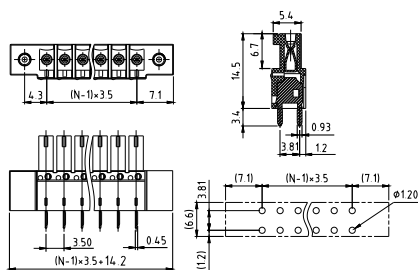


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V7




Pitch 3.5mm
Right angle
Poles 2p~24p
V7xx11510000G*
Number of poles

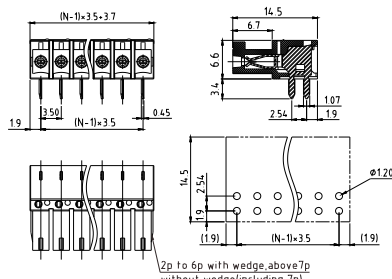


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V7




Pitch 3.5mm
Right angle, W/F
Poles 2p~24p
V7xx12510000G*
Number of poles

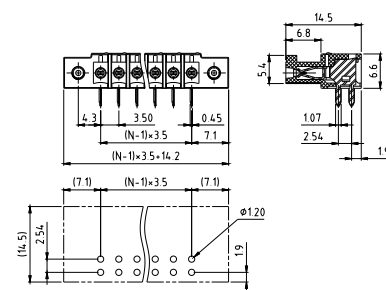


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V7




Pitch 3.81mm
Vertical
Poles 2p~24p
V7xx31500000G*
Number of poles

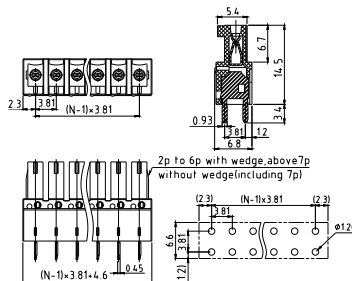


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 3.81mm
Vertical, W/F
Poles 2p~24p
V7xx32500000G*
Number of poles

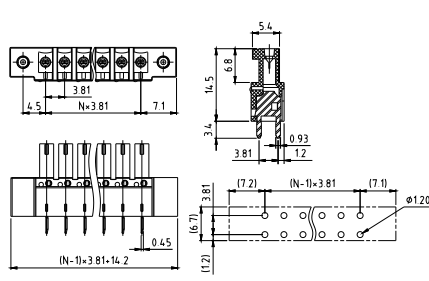


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 3.81mm
Right angle
Poles 2p~24p
V7xx31510000G*
Number of poles

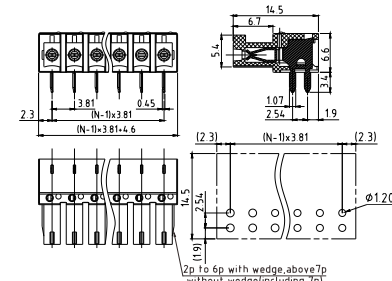


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 3.81mm
Right angle, W/F
Poles 2p~24p
V7xx32510000G*
Number of poles

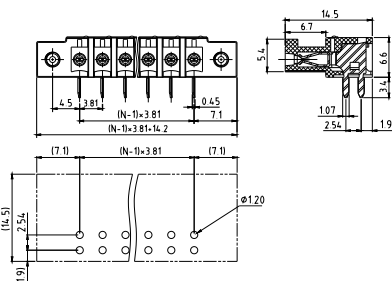


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.0mm
Vertical
Poles 2p~24p
V7xx71500000G*
Number of poles

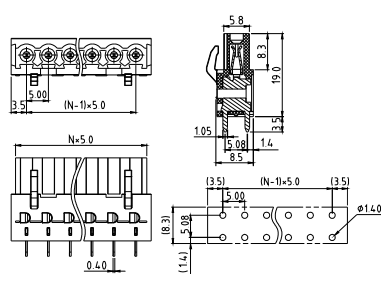


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.0mm
Vertical, W/F
Poles 2p~24p
V7xx72500000G*
Number of poles

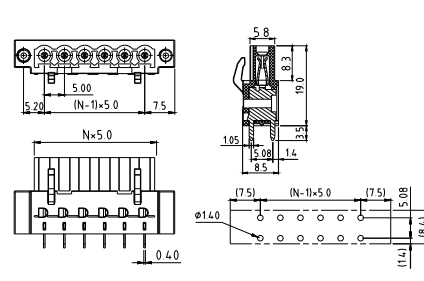


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.0mm
Right angle
Poles 2p~24p
V7xx71510000G*
Number of poles

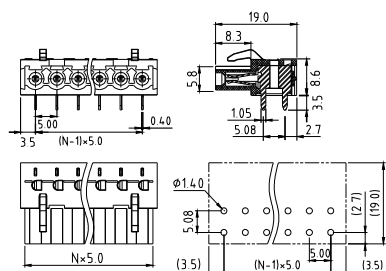


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.0mm
Right angle, W/F
Poles 2p~24p
V7xx72510000G*
Number of poles

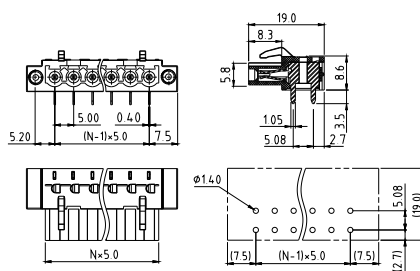


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.08mm
Vertical
Poles 2p~24p
V7xx5150000G*
Number of poles

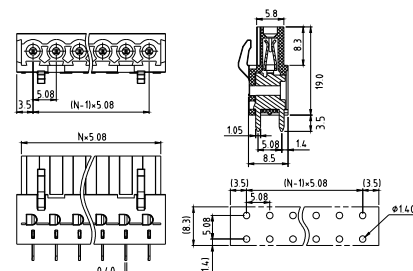


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.08mm
Vertical, W/F
Poles 2p~24p
V7xx52500000G*
Number of poles

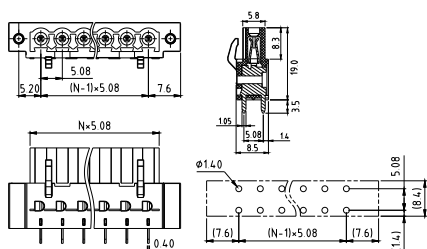


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.08mm
Right angle
Poles 2p~24p
V7xx51510000G*
Number of poles

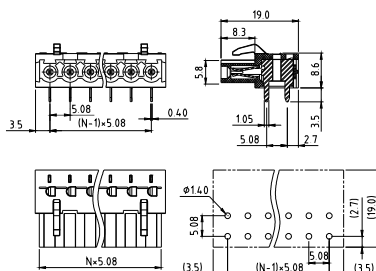


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 5.08mm
Right angle, W/F
Poles 2p~24p
V7xx51510000G*
Number of poles

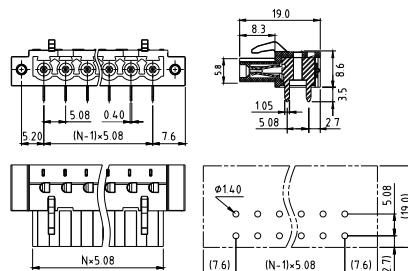


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 7.5mm
Vertical
Poles 2p~16p
V7xxA1500000G*
Number of poles

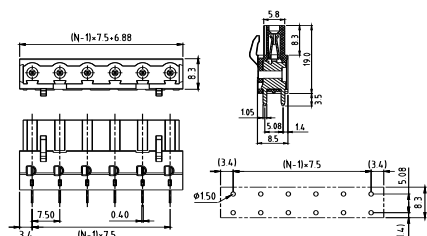


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

V7




Pitch 7.5mm
Vertical, W/F
Poles 2p~16p
V7xxA2500000G*
Number of poles

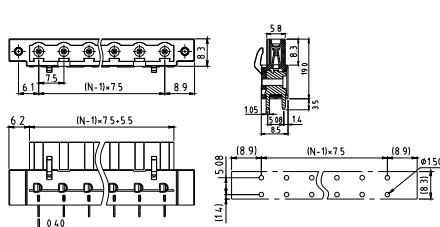


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

V7




Pitch 7.5mm
Right angle
Poles 2p~16p
V7xxA1510000G*
Number of poles

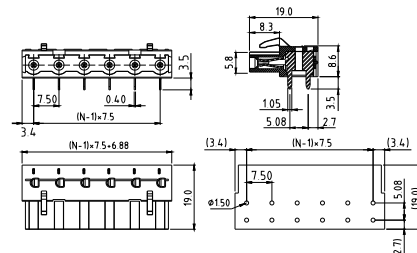


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

V7




Pitch 7.5mm
Right angle, W/F
Poles 2p~16p
V7xxA2510000G*
Number of poles

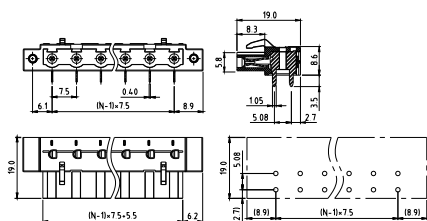


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

V7



Pitch 7.62mm
Vertical
Poles 2p~16p
V7xx01500000G*
Number of poles

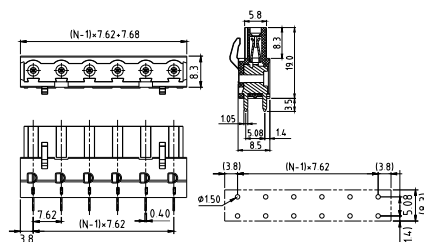


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

V7




Pitch 7.62mm
Vertical, W/F
Poles 2p~16p
V7xx02500000G*
Number of poles

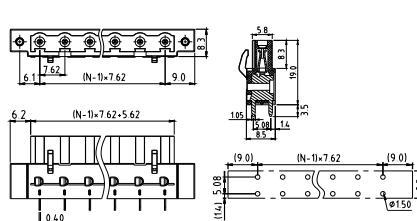


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

V7




Pitch 7.62mm
Right angle
Poles 2p~16p
V7xx01510000G*
Number of poles

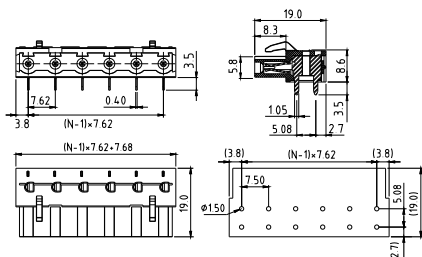


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

V7




Pitch 7.62mm
Right angle, W/F
Poles 2p~16p
V7xx02510000G*
Number of poles

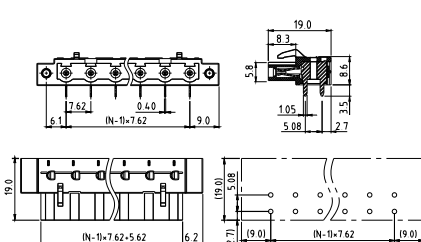


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

VX




Pitch 3.5mm
Open, Vertical
Poles 2*2p~2*24p
VXxx10300000G*
Number of poles

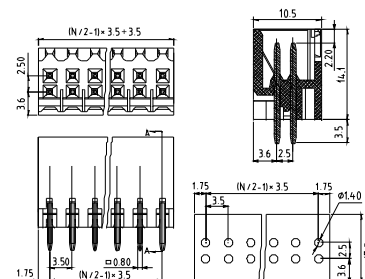


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

VX




Pitch 3.5mm
Open, Right angle
Poles 2*2p~2*24p
VXxx10310000G*
Number of poles

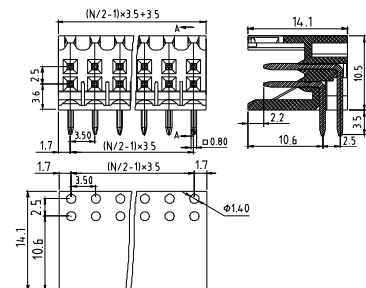


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

VX




Pitch 3.5mm
Close, Vertical
Poles 2*2p~2*24p
VXxx11300000G*
Number of poles

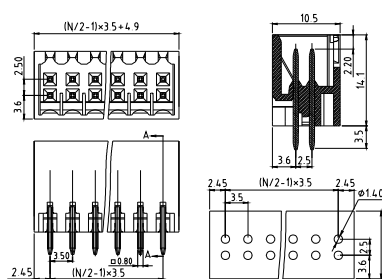


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

VX




Pitch 3.5mm
Close, Right angle
Poles 2*2p~2*24p
VXxx11310000G*
Number of poles

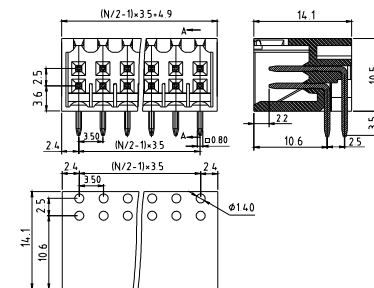


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

VX




Pitch 3.5mm
W/F, Vertical
Poles 2*2p~2*24p
VXxx1230000G*
Number of poles

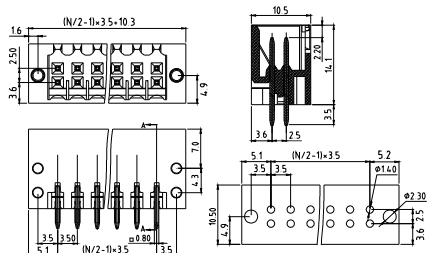


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval:

VX




Pitch 3.5mm
W/F, Right angle
Poles 2*2p~2*24p
VXxx12310000G*
Number of poles

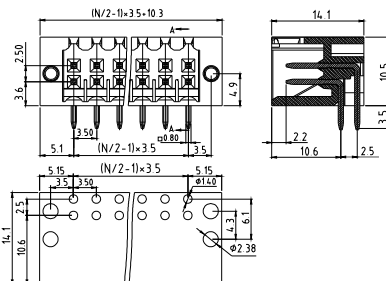


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval:

VX



Pitch 3.5mm
Open, Vertical
Poles 2*2p~2*16p
VXxx100AB000G*(THR Tape Reel)
Number of poles

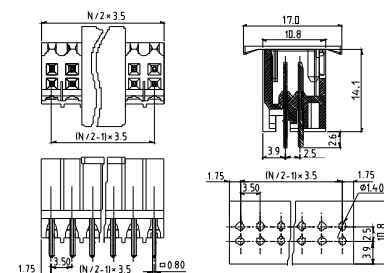


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval:

VX




Pitch 3.5mm
Open, Right angle
Poles 2*2p~2*16p
VXxx100BB000G*(THR Tape Reel)
Number of poles




Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval:

VX




Pitch 3.5mm
Close, Vertical
Poles 2*2p~2*16p
VXxx110AB000G*(THR Tape Reel)
Number of poles

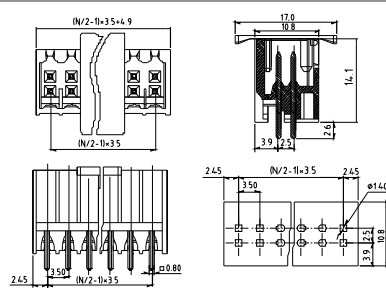


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval:

VX




Pitch 3.5mm
Close, Right angle
Poles 2*2p~2*16p
VXxx110BB000G*(THR Tape Reel)
Number of poles

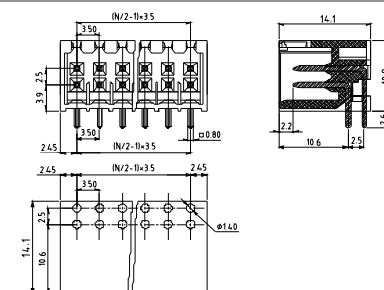


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval:

VX




Pitch 3.5mm
W/F, Vertical
Poles 2*2p~2*16p
VXxx120AB000G*(THR Tape Reel)
Number of poles

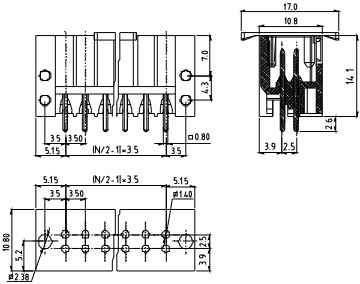


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

VX




Pitch 3.5mm
W/F, Right angle
Poles 2*2p~2*16p
VXxx120BB000G*(THR Tape Reel)
Number of poles

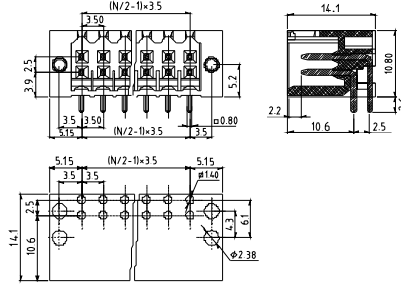


Electrical: cULus
Voltage rating: 150V
Current rating: 7A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.3KV
Safety Approval: **cULus**

NR




Pitch 3.5mm
Vertical, Close, DIP
Poles 2*2p~2*24p
NRxx1350xxxG*
Number of poles

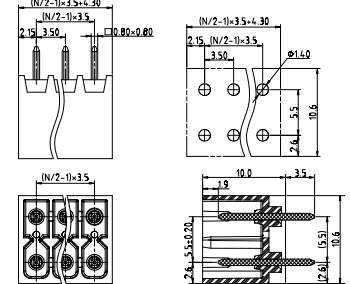


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NR




Pitch 3.5mm
Vertical, With flange, DIP
Poles 2*2p~2*24p
NRxx1450xxxG*
Number of poles

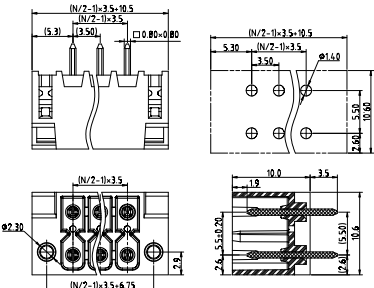


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NR




Pitch 3.5mm
Vertical, Close, THR
Poles 2*2p~2*24p
NRxx1100xxxG*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NR




Pitch 3.5mm
Vertical, With flange, THR
Poles 2*2p~2*24p
NRxx1200xxxG*
Number of poles

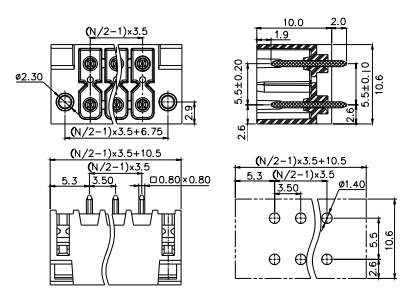


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NR - B type



Pitch 3.5mm
Right angle, Close, THT
Poles 2*2p~2*20p
NRxx1A510000G*
Number of poles

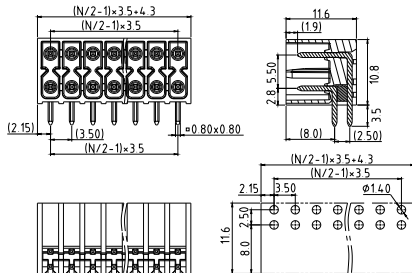


Electrical: cULus
Voltage rating: 150V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

NR - B type




Pitch 3.5mm
Right angle, With flange, THT
Poles 2*2p~2*20p
NRxx1B510000G*
Number of poles

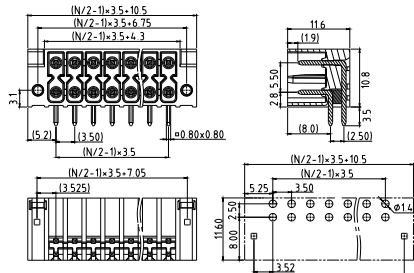


Electrical: cULus
Voltage rating: 150V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

NR - B type




Pitch 3.5mm
Right angle, Close, THR
Poles 2*2p~2*20p
NRxx1C010000G*
Number of poles

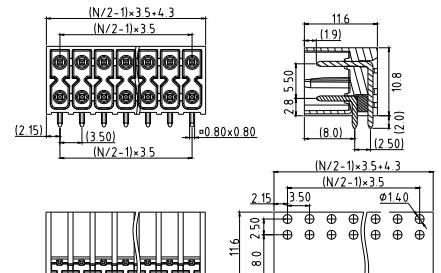


Electrical: cULus
Voltage rating: 150V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

NR - B type




Pitch 3.5mm
Right angle, With flange, THR
Poles 2*2p~2*20p
NRxx1D010000G*
Number of poles

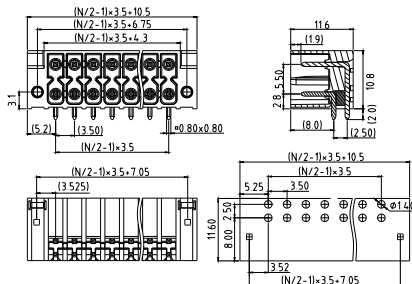


Electrical: cULus
Voltage rating: 150V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.3KV
Safety Approval: cULus

KE




Pitch 3.5mm
Close, Vertical
Poles 2*2p~2*24p
KExx1150xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE




Pitch 3.5mm
Close, Right angle
Poles 2*2p~2*24p
KExx1151xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE




Pitch 3.5mm
W/F, Vertical
Poles 2*2p~2*24p
KExx1250xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**

KE




Pitch 3.5mm
W/F, Right angle
Poles 2*2p~2*24p
KExx1251xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**

KE




Pitch 3.5mm
Vertical, W/latch holder
Poles 2*2p~2*24p
KExx1350xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**

KE




Pitch 3.5mm
Right angle, W/latch holder
Poles 2*2p~2*24p
KExx1351xxxxG*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: **cULus**

KE




Pitch 3.81mm
Close, Vertical
Poles 2*2p~2*24p
KExx3150xxxxG*
Number of poles

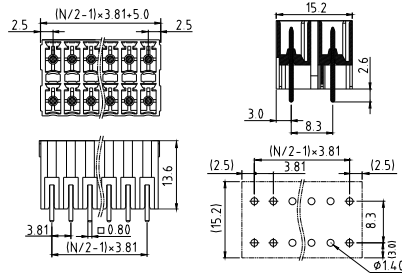


Electrical: cULus
Voltage rating: 300V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 3.81mm
Close, Right angle
Poles 2*2p~2*24p
KExx3151xxxxG*
Number of poles

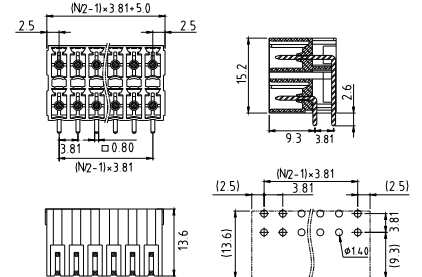


Electrical: cULus
Voltage rating: 300V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.0mm
W/F, Vertical
Poles 2*2p~2*24p
KExx72520000G*
Number of poles

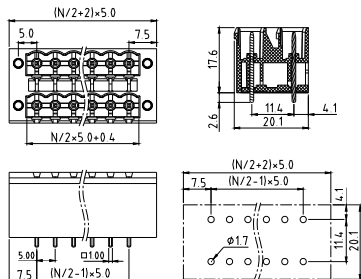

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KE



Pitch 5.0mm
W/F, Right angle
Poles 2*2p~2*24p
KExx72530000G*
Number of poles

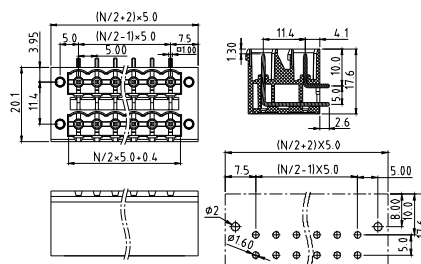

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KE



Pitch 5.0mm
Vertical, W/latch holder
Poles 2*2p~2*24p
KExx73520000G*
Number of poles

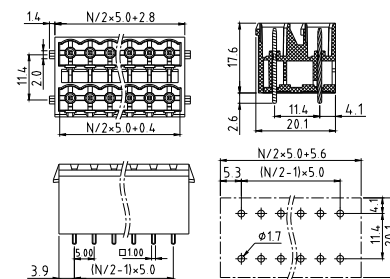

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KE



Pitch 5.0mm
Right angle, W/latch holder
Poles 2*2p~2*24p
KExx73530000G*
Number of poles

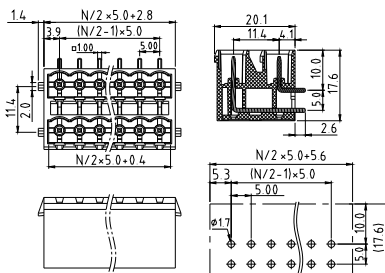

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KE



Pitch 5.0mm
Open, Vertical
Poles 2*2p~2*24p
KExx74520000G*
Number of poles

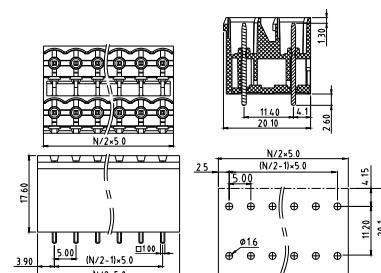

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KE



Pitch 5.0mm
Open, Right angle
Poles 2*2p~2*24p
KExx74530000G*
Number of poles

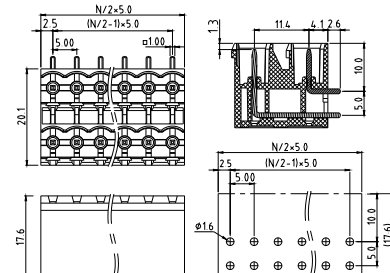

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: **cULus**

KE




Pitch 5.08mm
Close, Vertical
Poles 2*2p~2*24p
KExx51520000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE




Pitch 5.08mm
Close, Right angle
Poles 2*2p~2*24p
KExx51530000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE




Pitch 5.08mm
W/F, Vertical
Poles 2*2p~2*24p
KExx52520000G*
Number of poles

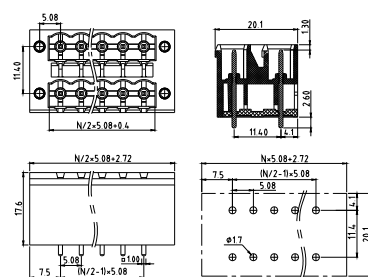


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.08mm
W/F, Right angle
Poles 2*2p~2*24p
KExx52530000G*
Number of poles

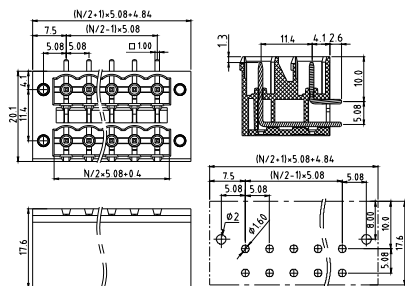


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE




Pitch 5.08mm
Vertical, W/latch holder
Poles 2*2p~2*24p
KExx53520000G*
Number of poles

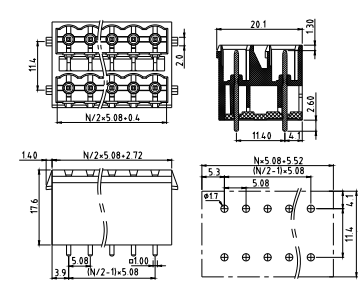


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE




Pitch 5.08mm
Right angle, W/latch holder
Poles 2*2p~2*24p
KExx53530000G*
Number of poles

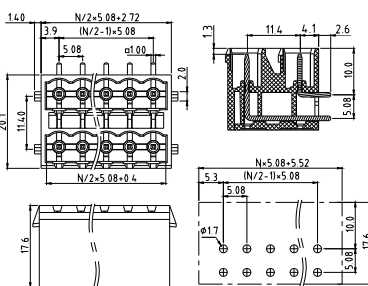


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In):

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 3.5mm(THR type)
Close, Vertical
Poles 2 *2p~2 *16p
KExx1A000000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE



Pitch 3.5mm(THR type)
Close, Right angle
Poles 2 *2p~2 *16p
KExx1A010000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE



Pitch 3.5mm(THR type)
W/F, Vertical
Poles 2 *2p~2 *16p
KExx1B000000G*
Number of poles

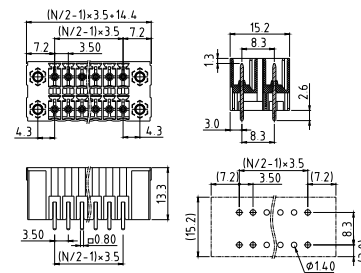


Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE




Pitch 3.5mm(THR type)
W/F, Right angle
Poles 2 *2p~2 *16p
KExx1B010000G*
Number of poles

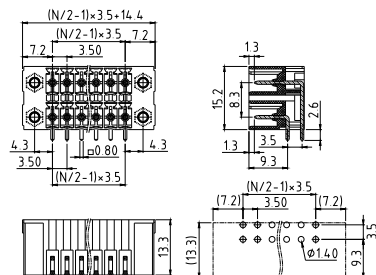


Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE



Pitch 3.5mm(THR type)
W/latch holder, Vertical
Poles 2 *2p~2 *16p
KExx1C000000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

KE



Pitch 3.5mm(THR type)
W/latch holder, Right angle
Poles 2 *2p~2 *16p
KExx1C010000G*
Number of poles



Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.32KV
Safety Approval: cULus

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	UL

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	CE


Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	UL

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	CE


Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	CE

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	CE

KE



Pitch 5.0mm(THR type)
Close, Vertical
Poles 2 *2p~2 *24p
KExx7100000G*
Number of poles

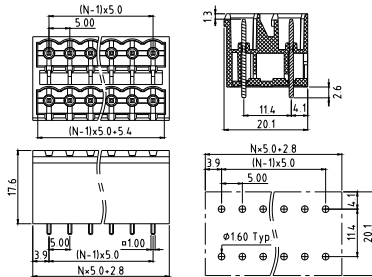


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

KE



Pitch 5.0mm(THR type)
Close, Right angle
Poles 2 *2p~2 *24p
KExx71010000G*
Number of poles

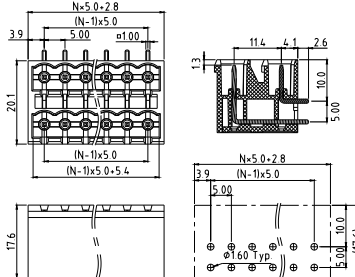


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

KE




Pitch 5.0mm(THR type)
W/F, Vertical
Poles 2 *2p~2 *24p
KExx72000000G*
Number of poles

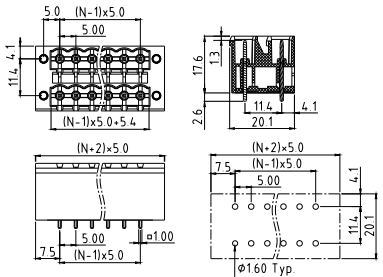


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

KE



Pitch 5.0mm(THR type)
W/F, Right angle
Poles 2 *2p~2 *24p
KExx72010000G*
Number of poles

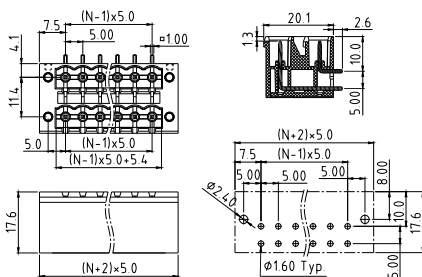


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

KE



Pitch 5.0mm(THR type)
W/latch holder, Vertical
Poles 2 *2p~2 *24p
KExx73000000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

KE




Pitch 5.0mm(THR type)
W/latch holder, Right angle
Poles 2 *2p~2 *24p
KExx73010000G*
Number of poles

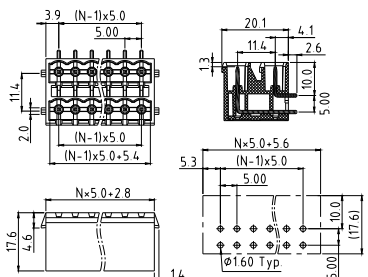


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

KE



Pitch 5.0mm(THR type)
Open, Vertical
Poles 2 *2p~2 *24p
KExx74000000G*
Number of poles

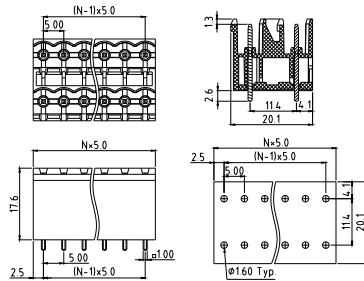

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.0mm(THR type)
Open, Right angle
Poles 2 *2p~2 *24p
KExx74010000G*
Number of poles

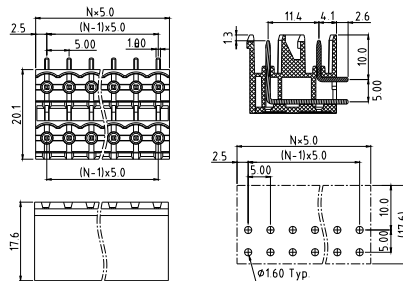


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.08mm(THR type)
Close, Vertical
Poles 2 *2p~2 *24p
KExx51000000G*
Number of poles

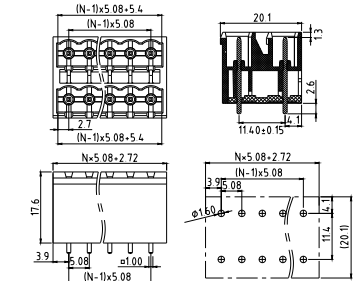

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.08mm(THR type)
Close, Right angle
Poles 2 *2p~2 *24p
KExx51010000G*
Number of poles

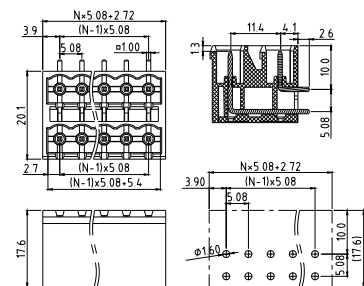


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.08mm(THR type)
W/F, Vertical
Poles 2 *2p~2 *24p
KExx52000000G*
Number of poles

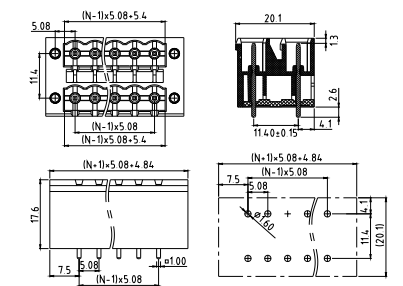

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.08mm(THR type)
W/F, Right angle
Poles 2 *2p~2 *24p
KExx52010000G*
Number of poles

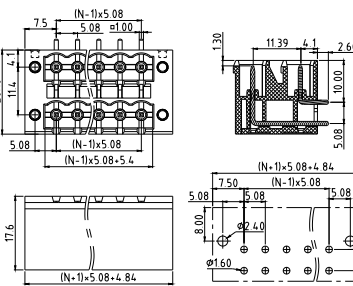

Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KE



Pitch 5.08mm(THR type)
W/latch holder, Vertical
Poles 2*2p~2*24p
KExx53000000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

KE




Pitch 5.08mm(THR type)
W/latch holder, Right angle
Poles 2*2p~2*24p
KExx53010000G*
Number of poles

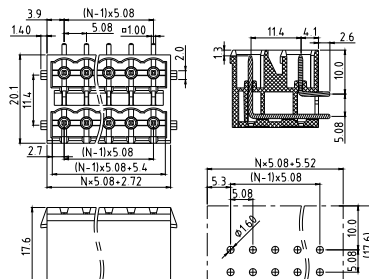


Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: cULus

VO




Pitch 3.5mm
Close, Vertical
Poles 2*2p~2*24p
VOxx11500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VO




Pitch 3.5mm
W/F, Vertical
Poles 2*2p~2*24p
VOxx12500000G*
Number of poles

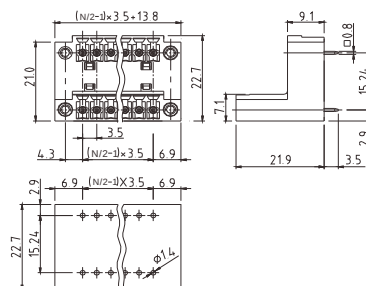


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VO




Pitch 3.5mm
Close, Right angle
Poles 2*2p~2*24p
VOxx11510000G*
Number of poles

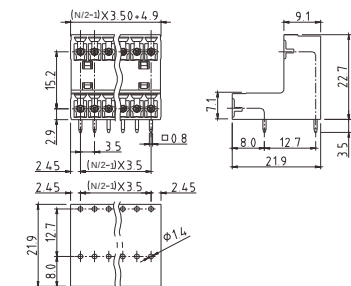


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VO




Pitch 3.5mm
W/F, Right angle
Poles 2*2p~2*24p
VOxx12510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VO




Number of poles




Withstanding Voltage:	1.6KV
Safety Approval:	CE, RoHS

VO




Number of poles




Withstanding Voltage:	1.6KV
Safety Approval:	CE, RoHS

VO




VOxx315100




Withstanding Voltage:	1.6KV
Safety Approval:	

VO




Number of poles

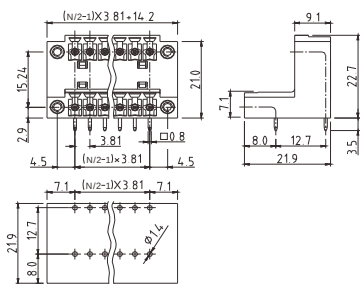


Withstanding Voltage:	1.6KV
Safety Approval:	

VF





Number of poles




Withstanding Voltage:	1.6KV
Safety Approval:	

VF


VFxx323000
Number of pole

Withstanding Voltage:	1.6KV
Safety Approval:	

VF




Pitch 3.81mm
Close, Right angle
Poles 2*2p~2*12p
VFxx31510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 3.81mm
W/F, Right angle
Poles 2*2p~2*12p
VFxx32510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.0mm
Open, Vertical
Poles 2*2p~2*24p
VFxx70500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.0mm
Open, Right angle
Poles 2*2p~2*24p
VFxx70510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.0mm
Close, Vertical
Poles 2*2p~2*24p
VFxx71500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.0mm
W/F, Vertical
Poles 2*2p~2*24p
VFxx72500000G*
Number of poles

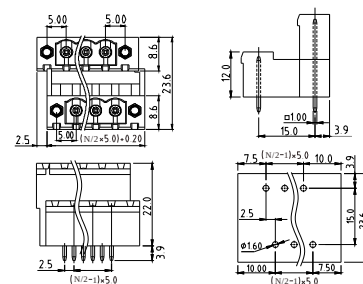


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.0mm
Close, Right angle
Poles 2*2p~2*24p
VFxx71510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VF




Pitch 5.0mm
W/F, Right angle
Poles 2*2p~2*24p
VFxx72510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VF



Pitch 5.08mm
Open, Vertical
Poles 2*2p~2*24p
VFxx50500000G*
Number of poles

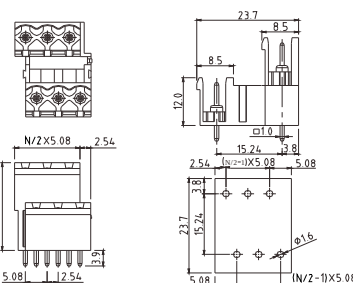

Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):


E

Withstanding Voltage: 1.6KV
Safety Approval: cULus


Withstanding Voltage: 1.6KV
Safety Approval: cULus

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.08mm
Open, Right angle
Poles 2*2p~2*24p
VFxx50510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VF




Pitch 5.08mm
Close, Vertical
Poles 2*2p~2*24p
VFxx51500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VF



Pitch 5.08mm
W/F, Vertical
Poles 2*2p~2*24p
VFxx52500000G*
Number of poles

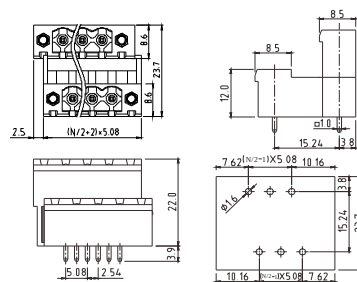


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus


Withstanding Voltage: 1.6KV
Safety Approval: cULus

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.08mm
Close, Right angle
Poles 2*2p~2*24p
VFxx51510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.08mm
W/F, Right angle
Poles 2*2p~2*24p
VFxx52510000G*
Number of poles

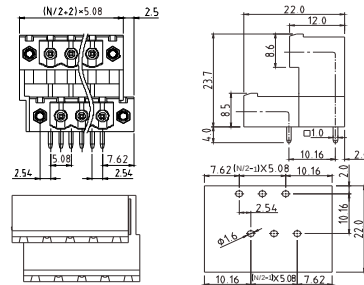


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.08mm
Close, Vertical, High type
Poles 2*2p~2*18p
VFxx53500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VF




Pitch 5.08mm
W/F, Vertical, High type
Poles 2*2p~2*18p
VFxx54500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

K3




Pitch 3.5mm
W/O flange, Right angle
Poles 3*2p~3*24p
K3xx1151A000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.32KV
Safety Approval: (cULus)pending

K3




Pitch 3.5mm
W/flange, Right angle
Poles 3*2p~3*24p
K3xx1251A000G*
Number of poles

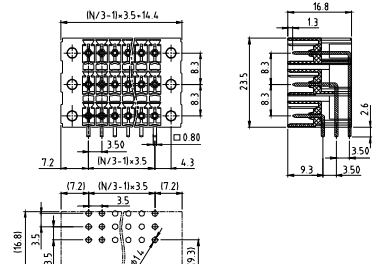


Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.32KV
Safety Approval: (cULus)pending

K3




Pitch 3.5mm
With latch, Right angle
Poles 3*2p~3*24p
K3xx1351A000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

K3




Pitch 3.5mm
W/O flange, Vertical
Poles 3*2p~3*24p
K3xx1150A000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

K3



Pitch 3.5mm
W/flange, Vertical
Poles 3*2p~3*24p
K3xx1250A000G*
Number of poles



Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):


E

Withstanding Voltage: 1.32KV
Safety Approval: (cULus)pending


Withstanding Voltage: 1.32KV
Safety Approval: (cULus)pending

Withstanding Voltage: 1.32KV
Safety Approval: (cULus)pending

K3




Pitch 3.5mm
With latch, Vertical
Poles 3*2p~3*24p
K3xx1350A000G*
Number of poles




Electrical: cULus
Voltage rating: 160V
Current rating: 5.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VE




Pitch 3.81mm
Close, Vertical
Poles 2p~24p
VExx31500000G*
Number of poles

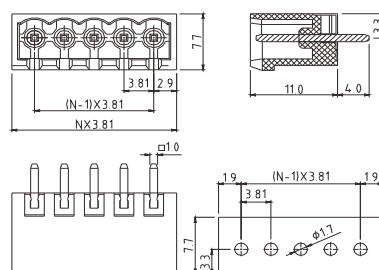


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

VE



Pitch 3.81mm
Close, Right angle
Poles 2p~24p
VExx31510000G*
Number of poles

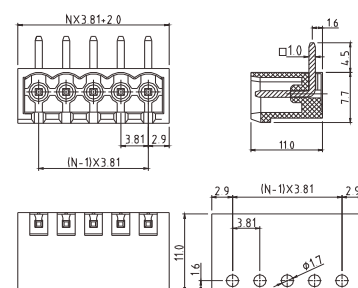


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.32KV
Safety Approval: (cULus)pending


Withstanding Voltage: 1.6KV
Safety Approval: cULus

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VE




Pitch 3.81mm
Open, Vertical
Poles 2p~24p
VExx30500000G*
Number of poles

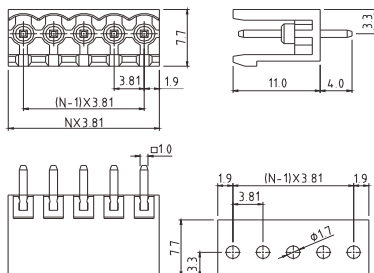


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VE




Pitch 3.81mm
Open, Right angle
Poles 2p~24p
VExx30510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VE




Pitch 3.81mm
W/F, Vertical
Poles 2p~24p
VExx32500000G*
Number of poles

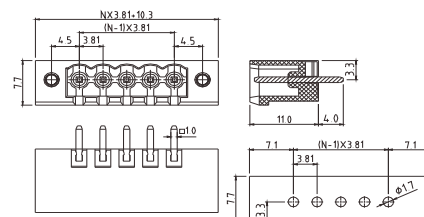


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VE




Pitch 3.81mm
W/F, Right angle
Poles 2p~24p
VExx32510000G*
Number of poles

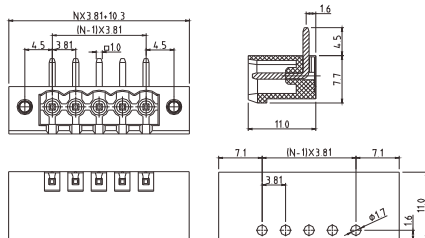


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VZ




Pitch 3.81mm
Poles 2p~24p
VZxx30500000G*
Number of poles

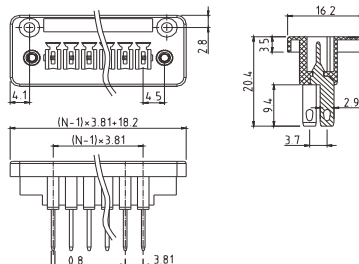


Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

VZ




Pitch 5.08mm
Poles 2p~24p
VZxx50500000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 12A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):

Withstanding Voltage: 1.6KV
Safety Approval: cULus

V5




Pitch 3.81mm
Bottom cover fixed type
Poles 2p~24p
V5xx3150000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Torque(Lb-In) :	2.17

Screw:	M2
Wire strip length:	6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 3.81mm
W/F, Bottom cover fixed type
Poles 2p~24p
V5xx31510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Torque(Lb-In) :	2.17

Screw:	M2
Wire strip length:	6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 3.81mm
Dinrail holder A type
Poles 3p~24p
V5xx31520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Torque(Lb-In) :	2.17

Screw:	M2
Wire strip length:	6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 3.81mm
W/F, Dinrail holder A type
Poles 3p~24p
V5xx31530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Torque(Lb-In) :	2.17

Screw:	M2
Wire strip length:	6mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 5.08mm
Bottom cover fixed type
Poles 2p~24p
V5xx51500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 5.08mm
W/F, Bottom cover fixed type
Poles 2p~24p
V5xx51510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 5.08mm
Dinrail holder A type
Poles 2p~24p
V5xx51520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 5.08mm
W/F, Dinrail holder A type
Poles 2p~24p
V5xx51530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5



Pitch 5.08mm
Dinrail holder B type
Poles 2p~24p
V5xx51540000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V5




Pitch 5.08mm
W/F, Dinrail holder B type
Poles 2p~24p
V5xx51550000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NC




Pitch 5.0mm
Right angle
Poles 2p~24p
NCxx71810000G*
Number of poles

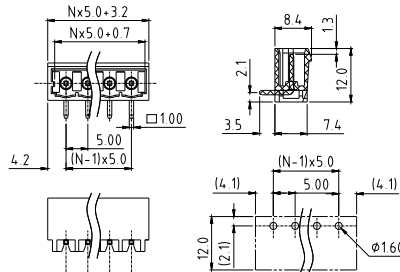


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NC




Pitch 5.0 mm
Vertical
Poles 2p~24p
NCxx71800000G*
Number of poles

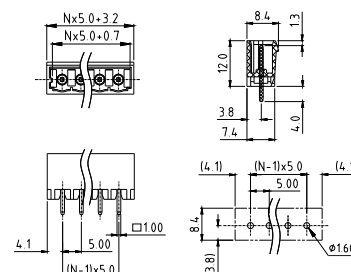


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NC




Pitch 5.0mm
Right angle, W/hook holder
(100% protected against mismatching)
Poles 2p~24p
NCxx72810000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NC




Pitch 5.0mm
Vertical, W/hook holder
(100% protected against mismatching)
Poles 2p~24p
NCxx72800000G*
Number of poles

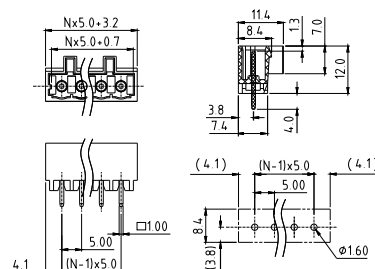


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

NC




Pitch 7.5mm-Right angle
Poles 2p~16p
NCxxA1810000G*
Number of poles

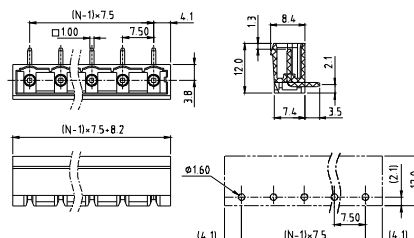


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (**cULus**) pending

NC




Pitch 7.5mm-Vertical
Poles 2p~16p
NCxxA1800000G*
Number of poles

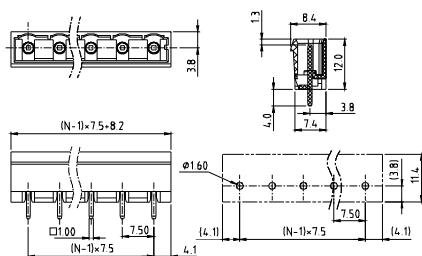


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (**cULus**) pending

NC




Pitch 7.5mm-Right angle
W/hook holder
(100% protected against mismatching)
Poles 2p~16p
NCxxA2810000G*
Number of poles

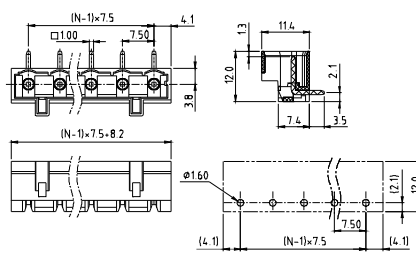


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (**cULus**) pending

NC




Pitch 7.5mm-Vertical
W/hook holder
(100% protected against mismatching)
Poles 2p~16p
NCxxA2800000G*
Number of poles

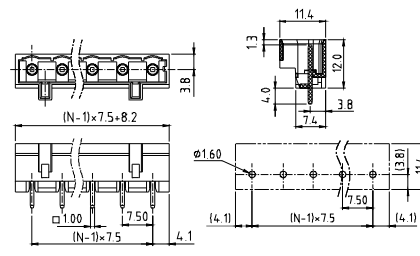


Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: (**cULus**) pending

PD



Pitch 5.0mm
Poles 2p~12p
PDxx00x00000G*
Number of poles

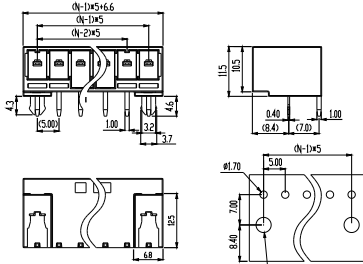


Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

PD




Pitch 7.5mm
Poles 2p~12p
PDxx20x00000G*
Number of poles

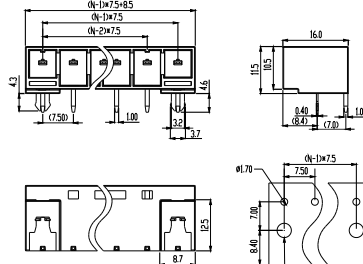


Electrical: cULus
Voltage rating: 300V
Current rating: 15A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval:

VS




Pitch 5.08mm
Close, Vertical
Poles 2p~24p
VSxx5150000G*
Number of poles

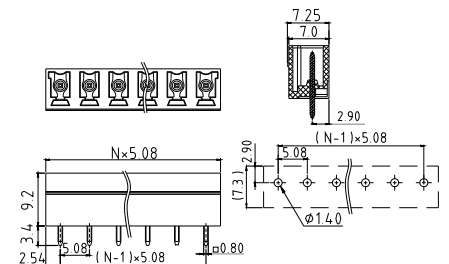


Electrical: cULus TUV
Voltage rating: 300V 250V
Current rating: 10A 17.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Rated Impulse Voltage: 4.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VS




Pitch 5.08mm
W/F, Vertical
Poles 2p~24p
VSxx5250000G*
Number of poles

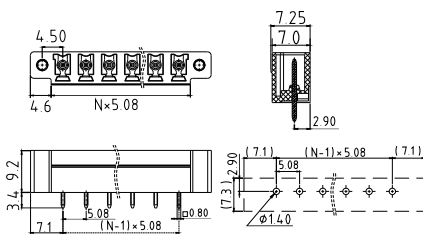


Electrical: cULus TUV
Voltage rating: 300V 250V
Current rating: 10A 17.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :
Screw:
Wire strip length:
Rated Impulse Voltage: 4.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VS




Pitch 5.08mm
Close, Right angle
Poles 2p~24p
VSxx51510000G*
Number of poles

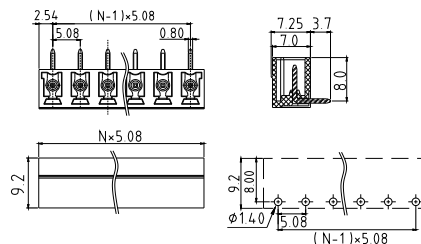


Electrical: cULus TUV
Voltage rating: 300V 250V
Current rating: 10A 17.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :
Screw:
Wire strip length:
Rated Impulse Voltage: 4.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VS




Pitch 5.08mm
W/F, Right angle
Poles 2p~24p
VSxx52510000G*
Number of poles

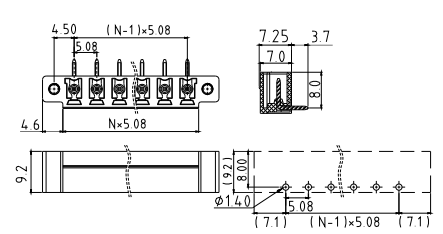


Electrical: cULus TUV
Voltage rating: 300V 250V
Current rating: 10A 17.5A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :
Screw:
Wire strip length:
Rated Impulse Voltage: 4.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

K4




Pitch 5.08mm(Mounting fixed type)
Poles 3p~24p
K4xx53800000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Torque(Lb-In) :	4.5

Screw:	M3.0
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

K4




Pitch 5.08mm(Dip solder type)
Poles 3p~24p
K4xx53820000G*

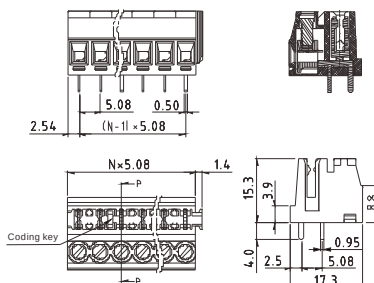


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Torque(Lb-In) :	4.5

Screw:	M3.0
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

V9




Pitch 5.08mm
Bottom cover fixed type
Poles 2p~24p
V9xx51500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.2

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

V9




Pitch 5.08mm
W/F, Bottom cover fixed type
Poles 2p~24p
V9xx51510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.2

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

V9




Pitch 5.08mm
Dinrail holder A type
Poles 2p~24p
V9xx51520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.2

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

V9




Pitch 5.08mm
W/F, Dinrail holder A type
Poles 2p~24p
V9xx51530000G*
Number of poles

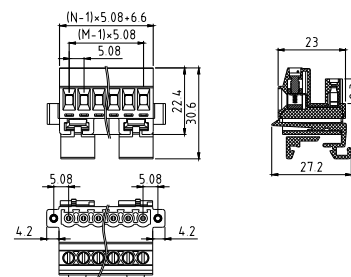


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5.2

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

VC




Pitch 7.62mm
Flange with nut
Vertical(Two tail A type)
Poles 2p~16p
VCxx01510000G*
Number of poles

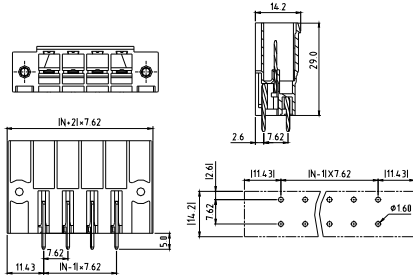


Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage: 6.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VC




Pitch 7.62mm-Close
Right angle(Three tail B type)(PCB down)
Poles 2p~16p
VCxx005C0000G*
Number of poles

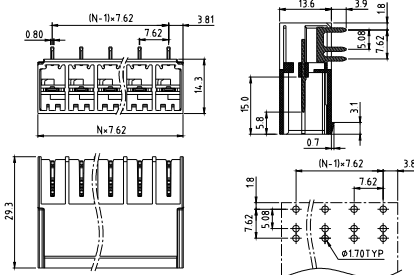


Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage: 6.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VC




Pitch 7.62mm-Close
Right angle(Three tail B type)(PCB up)
Poles 2p~16p
VCxx005B0000G*
Number of poles

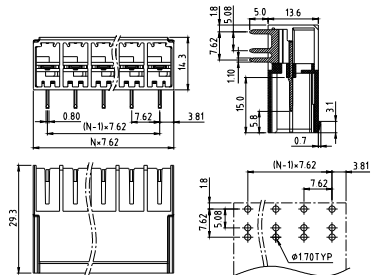


Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage: 6.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VC




Pitch 7.62mm-Flange with nut
Right angle(Three tail B type)(PCB down)
Poles 2p~16p
VCxx015C0000G*
Number of poles

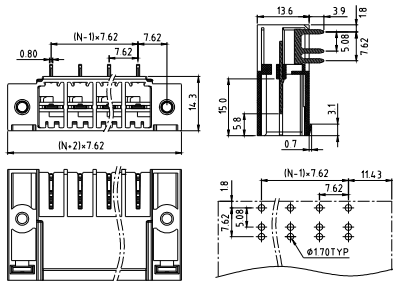


Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage: 6.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VC




Pitch 7.62mm-Flange with nut
Right angle(Three tail B type)(PCB up)
Poles 2p~16p
VCxx015B0000G*
Number of poles

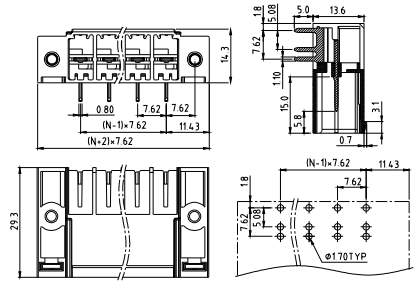


Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage: 6.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VC




Pitch 7.62mm
Close, Vertical(Three tail B type)
Poles 2p~16p
VCxx005A0000G*
Number of poles

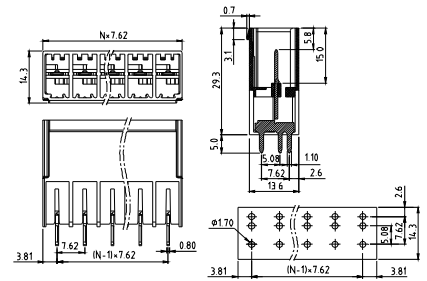


Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage: 6.0KV
Withstanding Voltage: 1.6KV
Safety Approval:

VC




Pitch 7.62mm
Flange with nut, Vertical
(Three tail B type)
Poles 2p~16p
VCxx015A0000G*
Number of poles

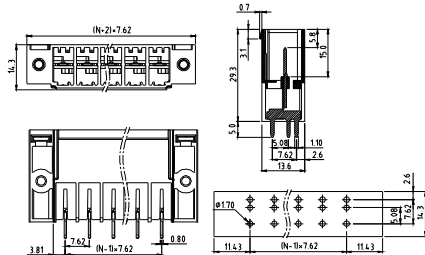


Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	

VC




Pitch 7.62mm
Feed-through header with slip-on connection
Poles 2p~16p
VCxx02510000G*
Number of poles

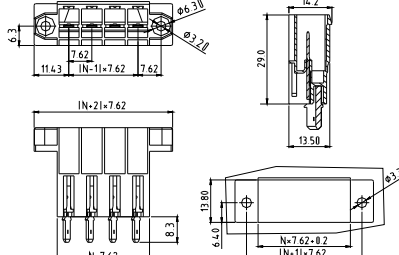


Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):		

Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	

KS




Pitch 7.62mm
Vertical
Poles 2p~16p
KSxx01500000G*
Number of poles

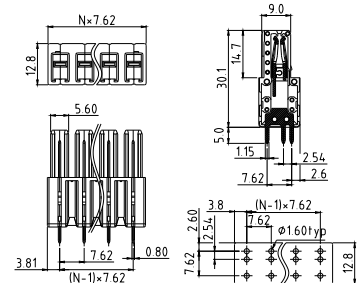


Electrical:	cULus
Voltage rating:	300V
Current rating:	41A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

KS




Pitch 7.62mm
W/flange, Vertical
Poles 2p~16p
KSxx02500000G*
Number of poles

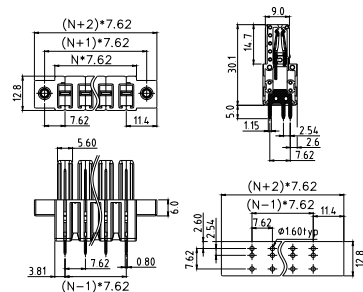


Electrical:	cULus
Voltage rating:	300V
Current rating:	41A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

KS




Pitch 7.62mm
Right angle(PCB down)
Poles 2p~16p
KSxx01510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	41A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

KS




Pitch 7.62mm
Right angle(PCB up)
Poles 2p~16p
KSxx01520000G*
Number of poles

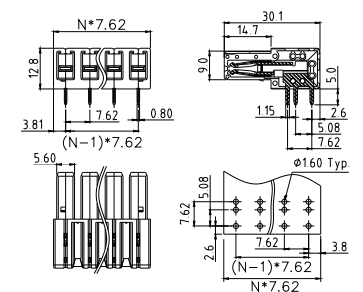


Electrical:	cULus
Voltage rating:	300V
Current rating:	41A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

KS




Pitch 7.62mm
W/flange, Right angle(PCB down)
Poles 2p~16p
KSxx02510000G*
Number of poles




Electrical: cULus
Voltage rating: 300V
Current rating: 41A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

KS



Pitch 7.62mm
W/flange, Right angle(PCB up)
Poles 2p~16p
KSxx02520000G*
Number of poles

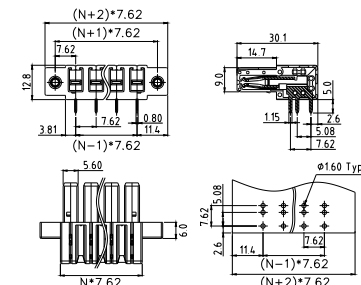


Electrical: cULus
Voltage rating: 300V
Current rating: 41A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EW




Pitch 10.16mm
Close, Vertical
Poles 2p~12p
EWxx61500000G*
Number of poles

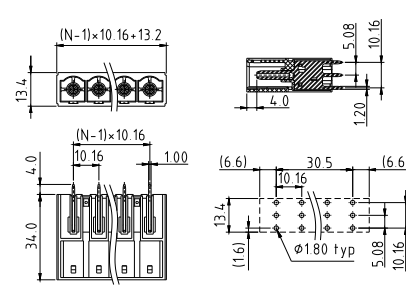


Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EW




Pitch 10.16mm
W/F, Vertical
Poles 2p~12p
EWxx62500000G*
Number of poles

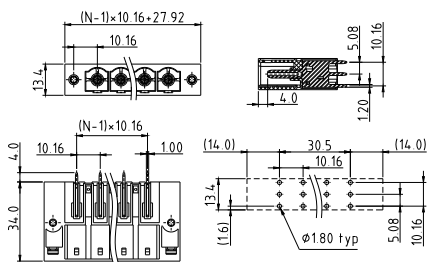


Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EW




Pitch 10.16mm
Close, Right angle(PCB down)
Poles 2p~12p
EWxx61510000G*
Number of poles

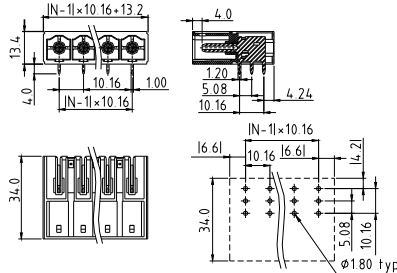


Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EW




Pitch 10.16mm
Close, Right angle(PCB up)
Poles 2p~12p
EWxx61520000G*
Number of poles

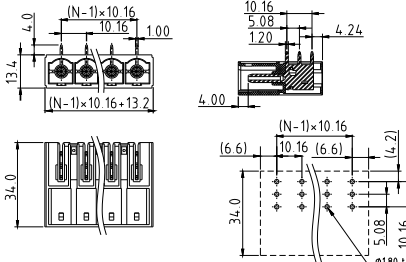


Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :

Screw:
Wire strip length:
Withstanding Voltage: 1.6KV
Safety Approval: **cULus**

EW



Pitch 10.16mm
W/F, Right angle(PCB down)
Poles 2p~12p
EWxx62510000G*
Number of poles

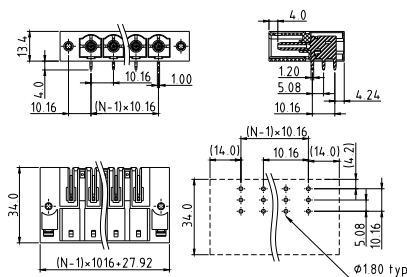

Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval:

EW



Pitch 10.16mm
W/F, Right angle(PCB up)
Poles 2p~12p
EWxx62520000G*
Number of poles

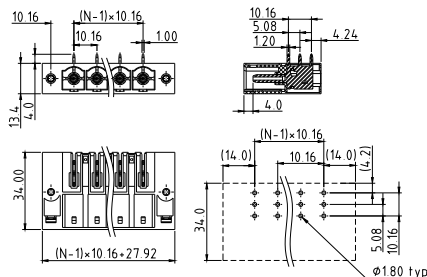

Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval:

KL



Pitch 10.16mm
Vertical
Poles 2p~12p
KLxx61500000G*
Number of poles

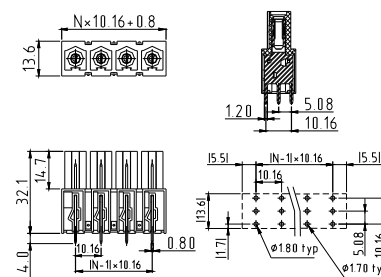

Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval:

KL



Pitch 10.16mm
W/F, Vertical
Poles 2p~12p
KLxx62500000G*
Number of poles

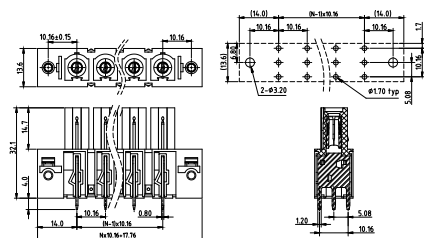

Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval:

KL



Pitch 10.16mm
Right angle(PCB up)
Poles 2p~12p
KLxx61520000G*
Number of poles



Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval:

KL



Pitch 10.16mm
W/F, Right angle(PCB up)
Poles 2p~12p
KLxx62520000G*
Number of poles

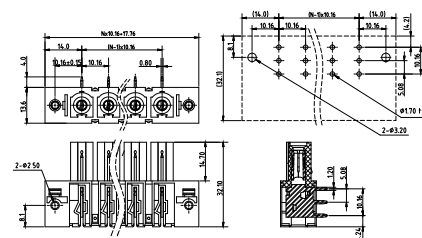

Electrical: cULus
Voltage rating: 300V
Current rating: 55A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval:

KL




Pitch 10.16mm
Right angle(PCB down)
Poles 2p~12p
KLxx61510000G*
Number of poles

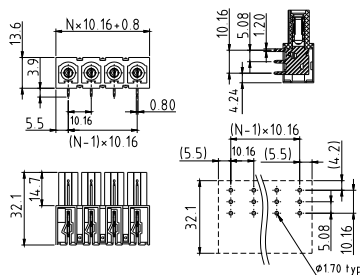


Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

KL




Pitch 10.16mm
W/F, Right angle(PCB down)
Poles 2p~12p
KLxx62510000G*
Number of poles

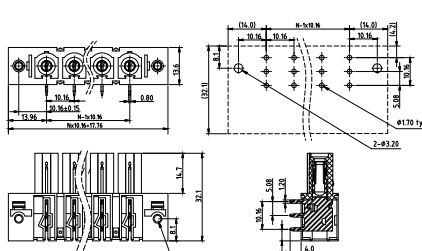


Electrical:	cULus
Voltage rating:	300V
Current rating:	55A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

KJ




Pitch 10.16mm
Poles 2p~12p
KJxx61500000G*
Number of poles

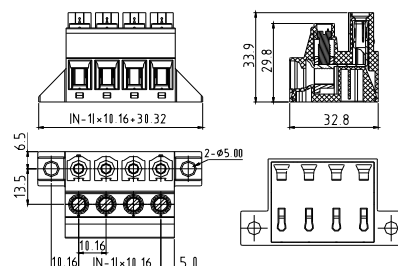


Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In) :	18Lb-In

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	2.2KV
Safety Approval:	

KU




Pitch 15.0mm
Vertical
Poles 2p~10p
KUxxC0500000G*
Number of poles

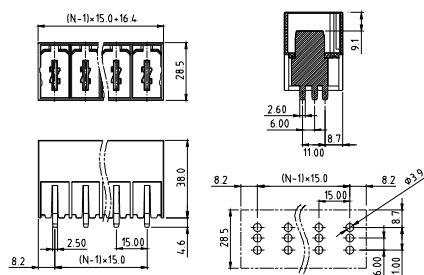


Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	2.2KV
Safety Approval:	

KU




Pitch 15.0mm
Right angle
Poles 2p~10p
KUxxC0510000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	2.2KV
Safety Approval:	

KU




Pitch 15.0mm
Vertical, W/flange
Poles 2p~10p
KUxxC1500000G*
Number of poles

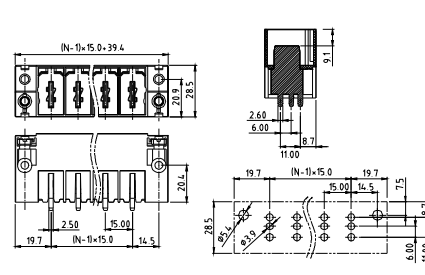


Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	2.2KV
Safety Approval:	

KU



Pitch 15.0mm
Right angle, W/flange
Poles 2p~10p
KUxxC1510000G*
Number of poles

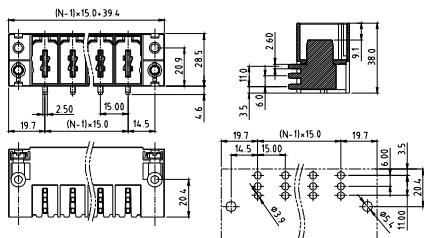

Electrical: cULus
Voltage rating: 600V
Current rating: 115A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 2.2KV

Safety Approval:

KU



Pitch 15.0mm
Vertical, W/F
Shield feed-through on the inside of the device
Poles 4p
KU04C2510000G*
Number of poles

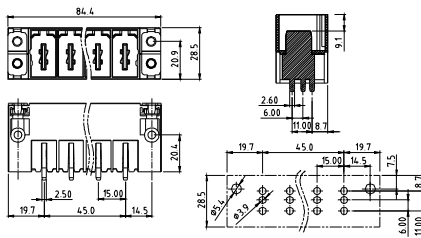

Electrical: cULus
Voltage rating: 600V
Current rating: 115A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 2.2KV

Safety Approval:

KU



Pitch 15.0mm
Right angle, W/F
Shield feed-through on the inside of the device
Poles 4p
KU04C2510000G*
Number of poles

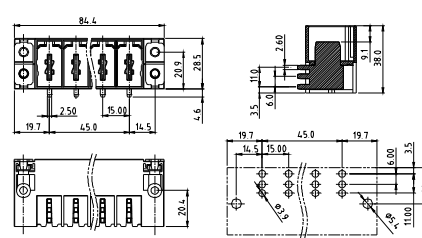

Electrical: cULus
Voltage rating: 600V
Current rating: 115A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :


Screw:

Wire strip length:


Withstanding Voltage: 2.2KV

Safety Approval:

KF



Pitch 3.5mm
Poles 2p~24p
KFxx105000000G*
Number of poles



Electrical: cULus
Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :
With P.C.B thickness : 1.6±0.2mm


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: ()pending

KF



Pitch 5.0mm
Poles 2p~24p
KFxx705000000G*
Number of poles



Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :
With P.C.B thickness : 1.6±0.2mm


Screw:

Wire strip length:


Withstanding Voltage: 1.6KV

Safety Approval: ()pending

KF



Pitch 7.5mm
Poles 2p~16p
KFxxA05000000G*
Number of poles



Electrical: cULus
Voltage rating: 300V
Current rating: 10A
Wire range:
Solid wire(AWG):
Stranded wire(AWG):
Torque(Lb-In) :
With P.C.B thickness : 1.6±0.2mm



Screw:

Wire strip length:

Withstanding Voltage: 1.6KV


Safety Approval: ()pending

Screw Clamp Plugs for Pluggable System

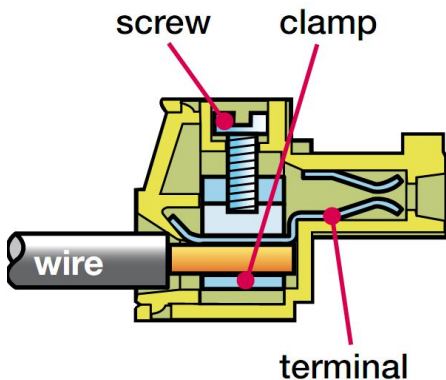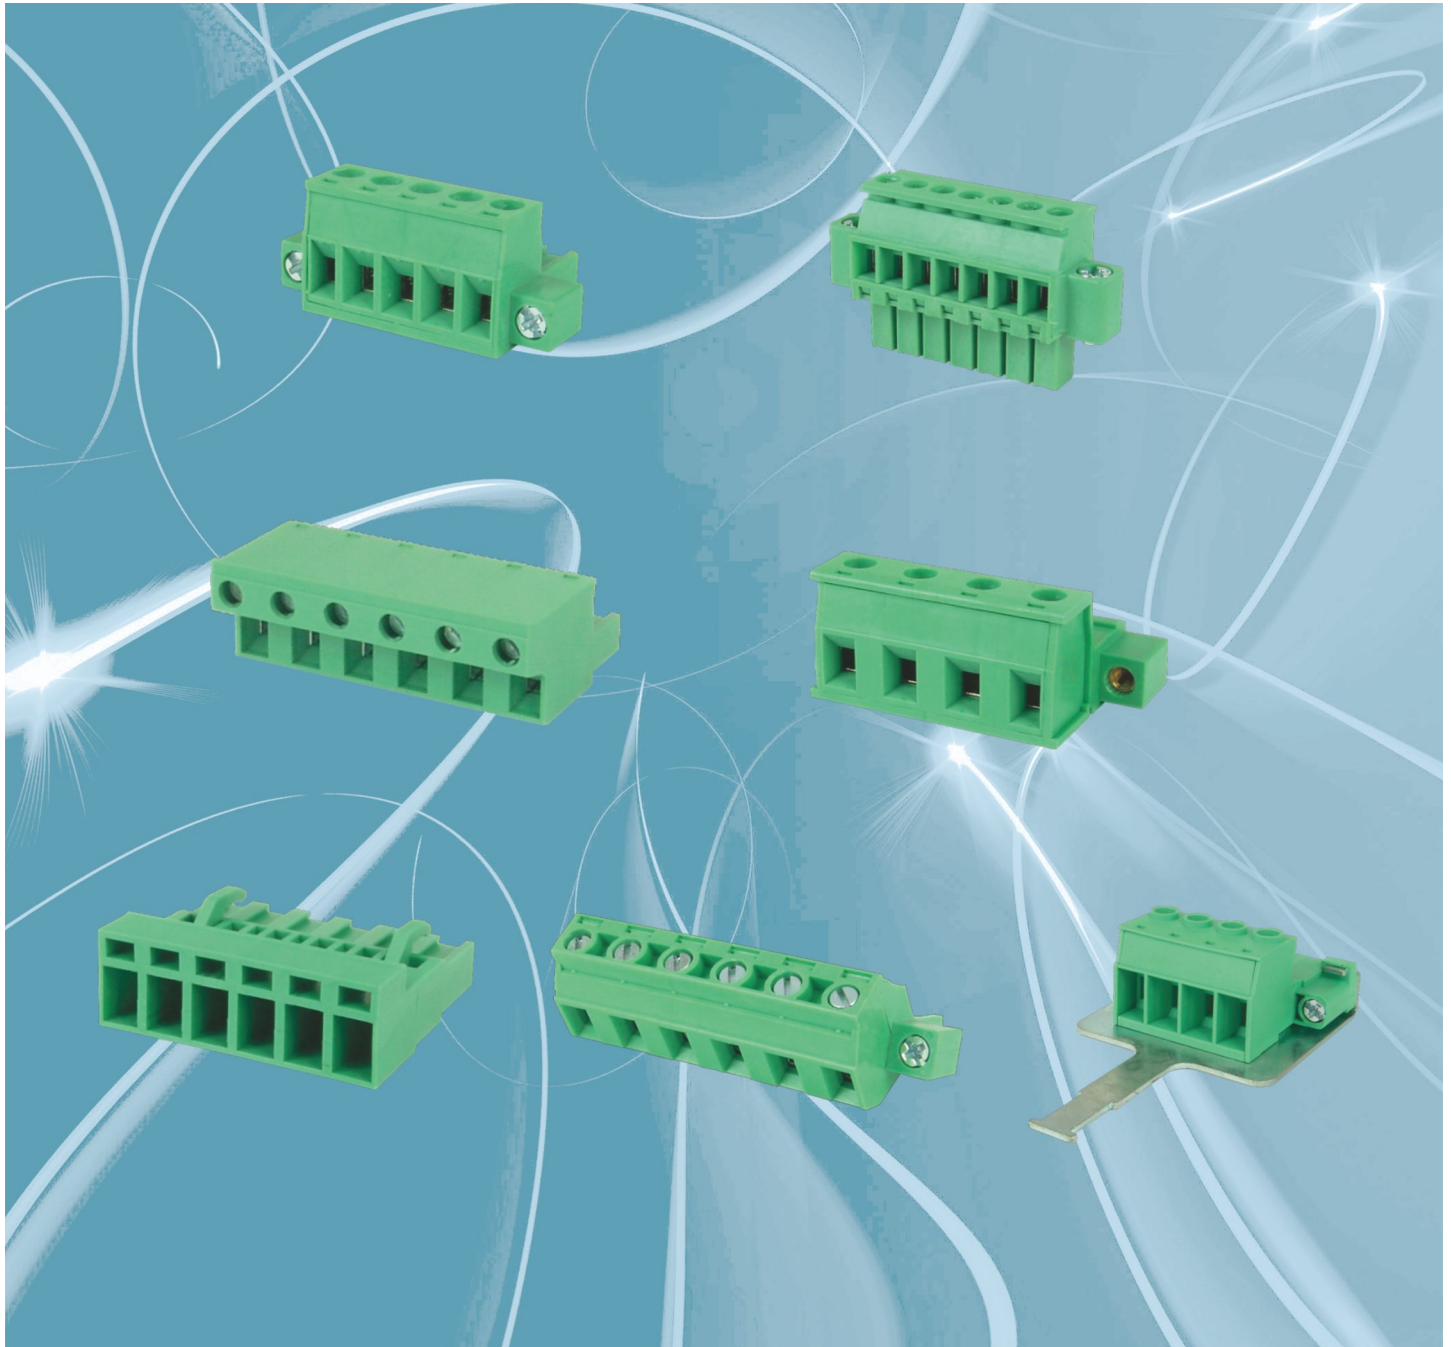


Pitch: 3.5, 3.81, 5.0, 5.08, 6.35, 7.5, 7.62, 10.16, 15.0
Rated Voltage Range(cULus) :160V-600V
Rated Current Range(cULus): 6A-115A

TJ




Pitch 3.5mm
Poles 2p~24p
TJxx11530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 3.5mm
With flange
Poles 2p~24p
TJxx11520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 3.81mm
Poles 2p~24p
TJxx31530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 3.81mm
With flange
Poles 2p~24p
TJxx31520000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ



Pitch 3.5/3.81 mm
With handle
Poles 2p~24p
TJxx1/31540000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	10A	10.5A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	3.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	6-7mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 5.0/5.08 mm
With handle
Poles 2p~24p
TJxx7/51540000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-30		
Stranded wire(AWG):	12-30		
Torque:	5Lb-In	0.5Nm	0.56Nm
Screw:	M3		
Wire strip length:	7-8mm		
Rated Impulse Voltage:	2.5KV	2.5KV	2.5KV
Withstanding Voltage:	1.6KV		
Safety Approval:			

TJ




Pitch 5.0mm
Contact on down side
Poles 2p~24p
TJxx7150000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-30		
Stranded wire(AWG):	12-30		
Torque:	5Lb-In	0.5Nm	0.56Nm
Screw:	M3		
Wire strip length:	7-8mm		
Rated Impulse Voltage:	2.5KV		
Withstanding Voltage:	1.6KV		
Safety Approval:			

TJ




Pitch 5.0mm
With flange, Contact on down side
Poles 2p~24p
TJxx71520000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-30		
Stranded wire(AWG):	12-30		
Torque:	5Lb-In	0.5Nm	0.56Nm
Screw:	M3		
Wire strip length:	7-8mm		
Rated Impulse Voltage:	2.5KV		
Withstanding Voltage:	1.6KV		
Safety Approval:			

TJ



Pitch 5.0mm
Contact on up side
Poles 2p~24p
TJxx71560000G*
Number of poles

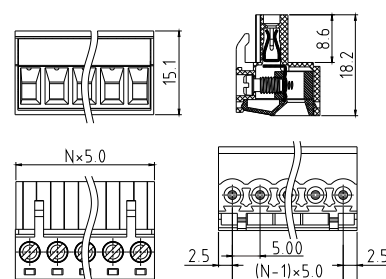


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	5Lb-In	0.56Nm
Screw:	M3	
Wire strip length:	7-8mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 5.0mm
With flange, Contact on up side
Poles 2p~24p
TJxx71570000G*
Number of poles

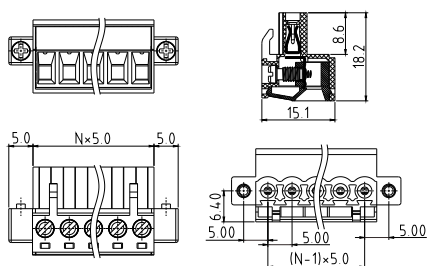


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	5Lb-In	0.56Nm
Screw:	M3	
Wire strip length:	7-8mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 5.08mm
Contact on down side
Poles 2p~24p
TJxx51530000G*
Number of poles




Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-30		
Stranded wire(AWG):	12-30		
Torque:	5Lb-In	0.5Nm	0.56Nm
Screw:	M3		
Wire strip length:	7-8mm		
Rated Impulse Voltage:	2.5KV		
Withstanding Voltage:	1.6KV		
Safety Approval:			

TJ



Pitch 5.08mm
With flange, Contact on down side
Poles 2p~24p
TJxx51520000G*
Number of poles

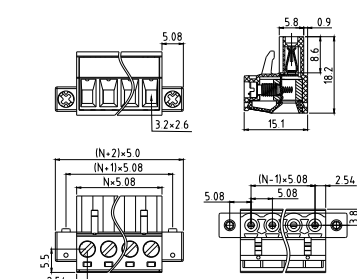


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	2.5mm ² / 0.34-2.5mm ²		
Solid wire(AWG):	12-30		
Stranded wire(AWG):	12-30		
Torque:	5Lb-In	0.5Nm	0.56Nm
Screw:	M3		
Wire strip length:	7-8mm		
Rated Impulse Voltage:	2.5KV		
Withstanding Voltage:	1.6KV		
Safety Approval:			

TJ




Pitch 5.08mm
Contact on up side
Poles 2p~24p
TJxx51560000G*
Number of poles

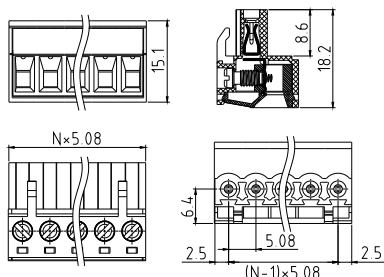


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	5Lb-In	0.56Nm
Screw:	M3	
Wire strip length:	7-8mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ



Pitch 5.08mm
With flange, Contact on up side
Poles 2p~24p
TJxx51570000G*
Number of poles

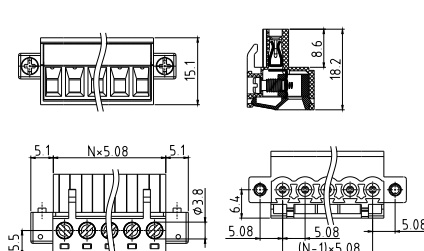


Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-30	
Stranded wire(AWG):	12-30	
Torque :	5Lb-In	0.56Nm
Screw:	M3	
Wire strip length:	7-8mm	
Rated Impulse Voltage:	2.5KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

TJ




Pitch 5.08mm
With latch holder
Poles 2p~12p
TJxx515B0000G*
Number of poles

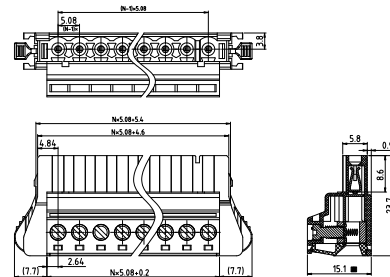


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	5.0
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 7.5mm
Poles 2p~16p
TJxxA1500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 7.5mm
With flange
Poles 2p~16p
TJxxA1520000G*
Number of poles

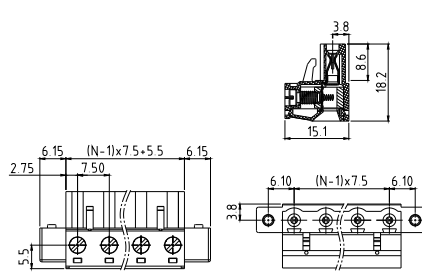


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ



Pitch 7.62mm
Poles 2p~16p
TJxx01500000G*
Number of poles

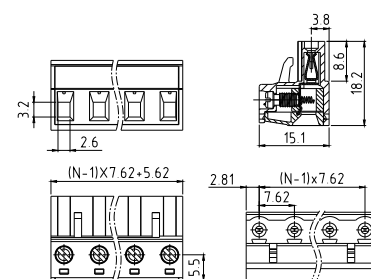


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5
Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TJ




Pitch 7.62mm
With flange
Poles 2p~16p
TJxx01520000G*
Number of poles

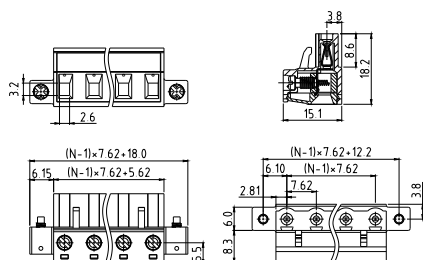


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-30
Stranded wire(AWG):	12-30
Torque(Lb-In) :	5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	

E2




Pitch 3.5mm
Poles 2p~24p
E2xx11300000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VD




Pitch 3.81mm
Poles 2p~24p
VDxx31500000G*
Number of poles

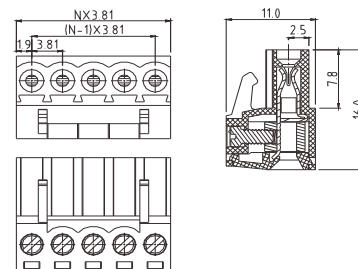


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VD




Pitch 3.81mm
With flange
Poles 2p~24p
VDxx31520000G*
Number of poles

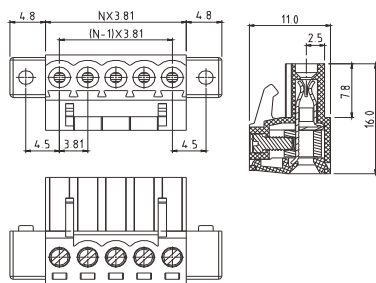


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	

K8




Pitch 3.81mm
Without flange
Poles 2p~24p
K8xx31500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

K8



Pitch 3.81mm
With flange
Poles 2p~24p
K8xx31520000G*
Number of poles

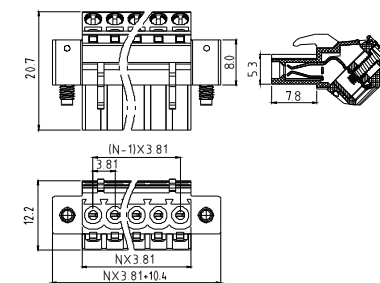


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

TS



Pitch 3.5mm
Hook on entry side
Poles 2p~24p
TSxx115A0000G*
Number of poles

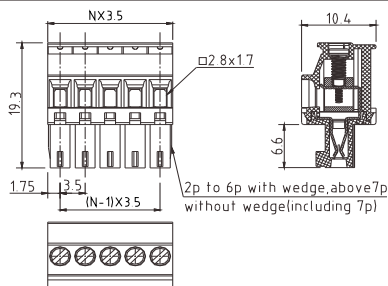


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

TS




Pitch 3.5mm
W/F, Hook on entry side
Poles 2p~24p
TSxx115C0000G*
Number of poles

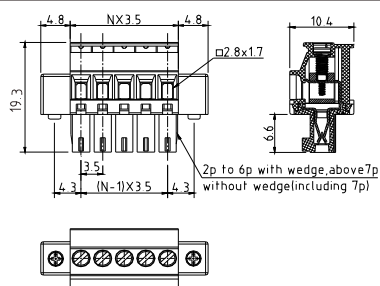


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

TS




Pitch 3.5mm
Hook on back side
Poles 2p~24p
TSxx115B0000G*
Number of poles

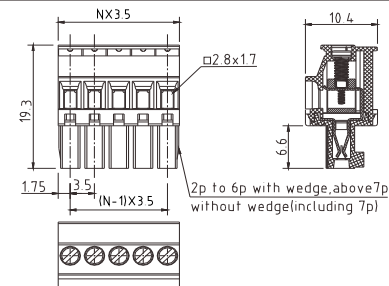


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

TS




Pitch 3.5mm
W/F, Hook on back side
Poles 2p~24p
TSxx115D0000G*
Number of poles

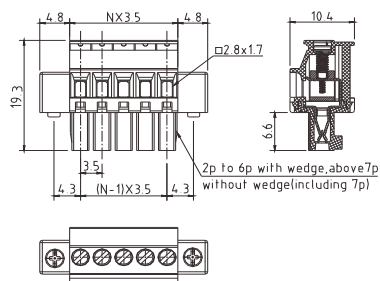


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

TS




Pitch 3.81mm
Hook on entry side
Poles 2p~24p
TSxx315A0000G*
Number of poles

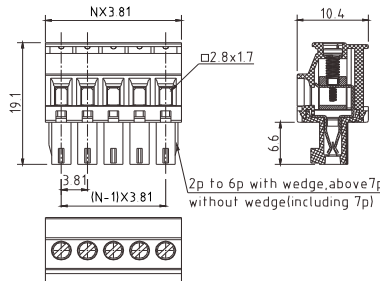


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

TS




Pitch 3.81mm
W/F, Hook on entry side
Poles 2p~24p
TSxx315C0000G*
Number of poles

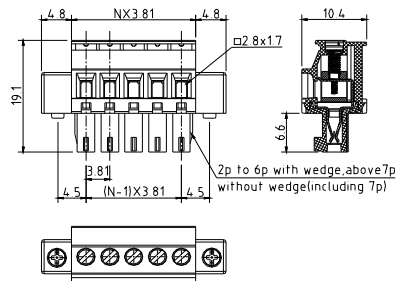


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

TS




Pitch 3.81mm
Hook on back side
Poles 2p~24p
TSxx315B0000G*
Number of poles

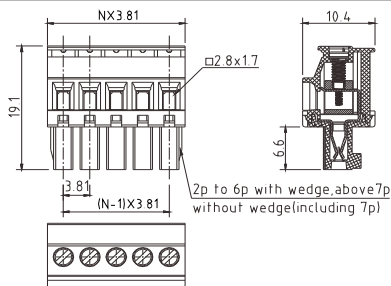


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	cULus VDE

TS




Pitch 3.81mm
W/F, Hook on back side
Poles 2p~24p
TSxx315D0000G*
Number of poles

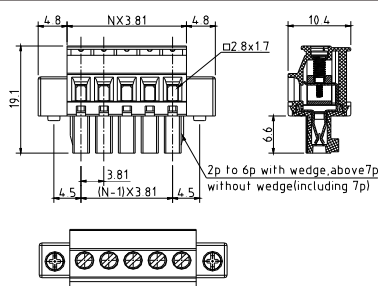


Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:	1.5mm ²	
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque :	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV
Safety Approval:	cULus VDE

TS




Pitch 5.0mm
Hook on entry side
Poles 2p~24p
TSxx715A0000G*
Number of poles

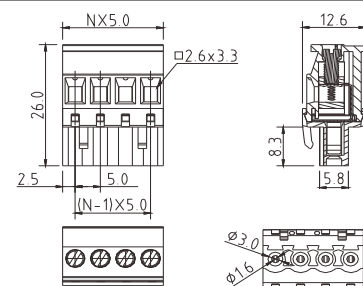


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:			

TS




Pitch 5.0mm
W/F, Hook on entry side
Poles 2p~24p
TSxx715C0000G*
Number of poles

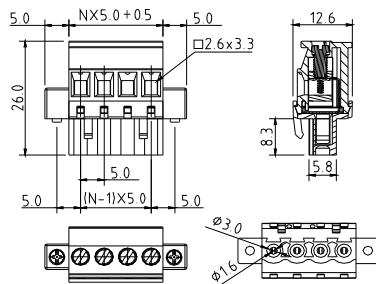


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:			

TS



Pitch 5.0mm
Hook on back side
Poles 2p~24p
TSxx715B0000G*
Number of poles

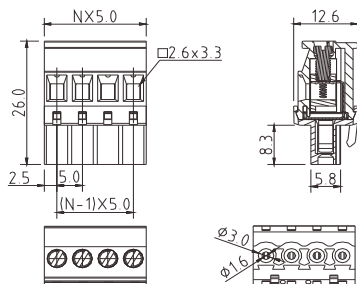


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:	1.6KV	2.5KV	2.5KV
Safety Approval:			

TS




Pitch 5.0mm
W/F, Hook on back side
Poles 2p~24p
TSxx715D0000G*
Number of poles

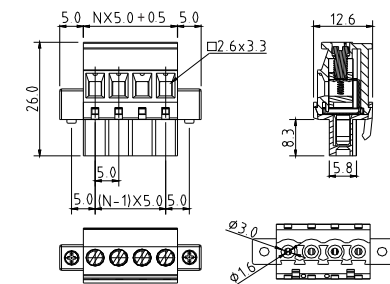


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3		
Wire strip length:	6-7mm		
Withstanding Voltage:1.6KV	2.5KV	2.5KV	
Safety Approval:			

TS




Pitch 5.08mm
Hook on entry side
Poles 2p~24p
TSxx515A0000G*
Number of poles

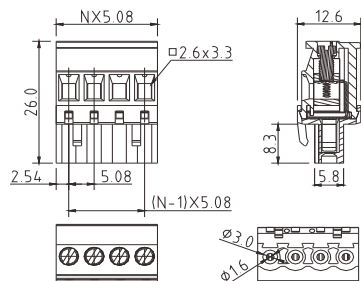


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV 2.5KV
Safety Approval:	

TS




Pitch 5.08mm
W/F, Hook on entry side
Poles 2p~24p
TSxx515C0000G*
Number of poles

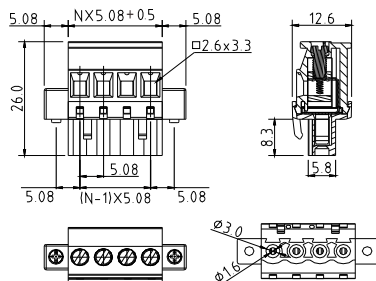


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV 2.5KV
Safety Approval:	

TS




Pitch 5.08mm
Hook on back side
Poles 2p~24p
TSxx515B0000G*
Number of poles

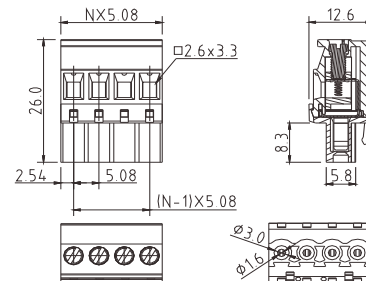


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV 2.5KV
Safety Approval:	

TS



Pitch 5.08mm
W/F, Hook on back side
Poles 2p~24p
TSxx515D0000G*
Number of poles

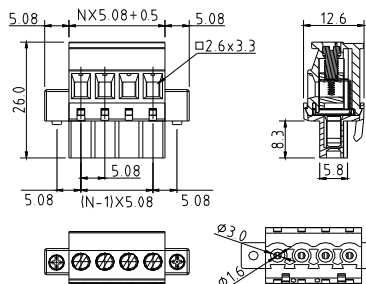


Electrical:	cULus	VDE	TUV
Voltage rating:	300V	300V	300V
Current rating:	15A	17A	15A
Wire range:	2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-24		
Stranded wire(AWG):	12-24		
Torque :	3.5Lb-In	0.5N.m	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:1.6KV	2.5KV 2.5KV
Safety Approval:	

TS




Pitch 7.5mm
Hook on entry side
Poles 2p~16p
TSxxA15A0000G*
Number of poles

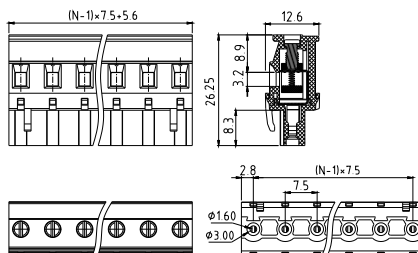


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

TS




Pitch 7.5mm
W/F, Hook on entry side
Poles 2p~16p
TSxxA15C0000G*
Number of poles

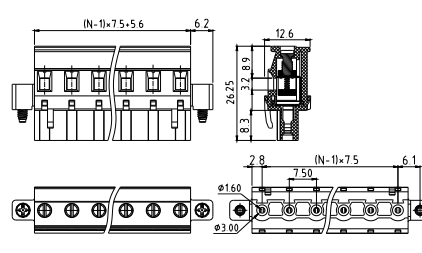


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage: 1.6KV	6.0KV
Safety Approval:	

TS




Pitch 7.5mm
Hook on back side
Poles 2p~16p
TSxxA15B0000G*
Number of poles

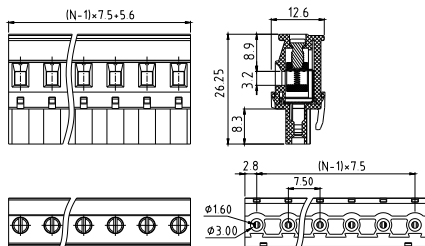


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS




Pitch 7.5mm
W/F, Hook on back side
Poles 2p~16p
TSxxA15D0000G*
Number of poles

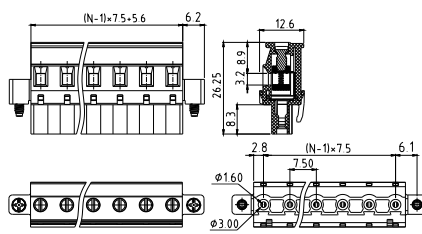


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS




Pitch 7.62mm
Hook on entry side
Poles 2p~16p
TSxx015A0000G*
Number of poles

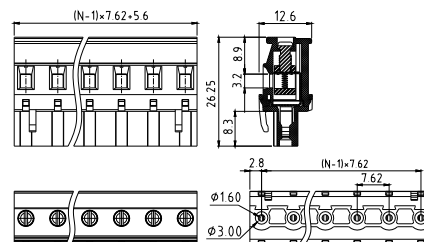


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS



Pitch 7.62mm
W/F, Hook on entry side
Poles 2p~16p
TSxx015C0000G*
Number of poles

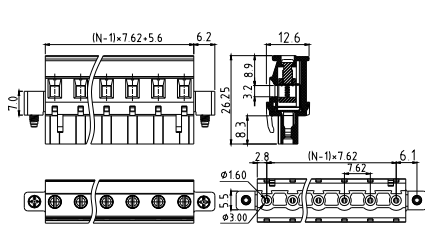


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS




Pitch 7.62mm
Hook on back side
Poles 2p~16p
TSxx015B0000G*
Number of poles

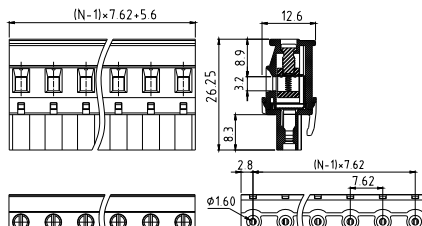


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

TS




Pitch 7.62mm
W/F, Hook on back side
Poles 2p~16p
TSxx015D0000G*
Number of poles

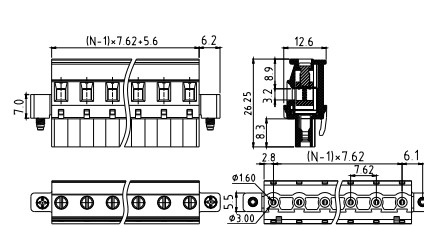


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	15A	15A
Wire range:	0.2-2.5mm ²	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque :	3.5Lb-In	0.4N.m

Screw:	M3	
Wire strip length:	6-7mm	
Withstanding Voltage:	1.6KV	6.0KV
Safety Approval:		

VM




Pitch 3.5mm
Poles 2p~24p
VMxx15500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VM




Pitch 3.5mm-W/F
Poles 2p~24p
VMxx15520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Torque(Lb-In) :	1.7

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VM




Pitch 3.81mm
Poles 2p~24p
VMxx35500000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V(II/2)
Current rating:	10A	10A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque:	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Rated impulse voltage(II/2):	2.5KV
Safety Approval:	 

VM




Pitch 3.81mm-W/F
Poles 2p~24p
VMxx35520000G*
Number of poles

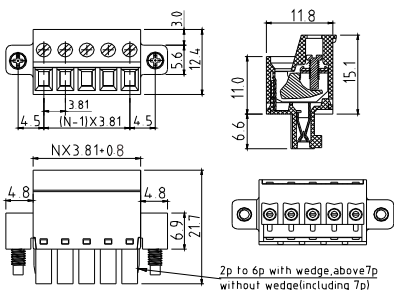


Electrical:	cULus	VDE
Voltage rating:	300V	300V(II/2)
Current rating:	10A	10A
Wire range:		0.2-1.5mm ²
Solid wire(AWG):	16-28	
Stranded wire(AWG):	16-28	
Torque:	1.7Lb-In	0.2N.m

Screw:	M2
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Rated impulse voltage(II/2):	2.5KV
Safety Approval:	 

VM




Pitch 5.0mm
Poles 2p~24p
VMxx75500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VM




Pitch 5.0mm-W/F
Poles 2p~24p
VMxx75520000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	3.5Lb-In	0.4N.m

Screw:	M2.5	
Wire strip length:	8-9mm	
Withstanding Voltage:	1.6KV	2.5KV
Safety Approval:		

VM




Pitch 5.08mm
Poles 2p~24p
VMxx5550000G*
Number of poles

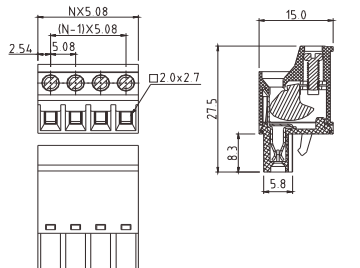


Electrical:	cULus	TUV	VDE
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	0.34-2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-22		
Stranded wire(AWG):	12-22		
Torque :	3.5Lb-In	0.4N.m	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VM




Pitch 5.08mm-W/F
Poles 2p~24p
VMxx55520000G*
Number of poles

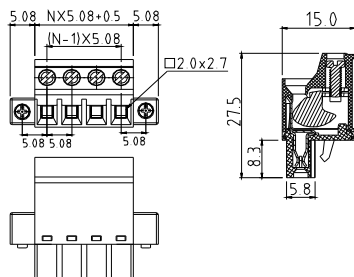


Electrical:	cULus	TUV	VDE
Voltage rating:	300V	300V	300V
Current rating:	12A	20A	20A
Wire range:	0.34-2.5mm ² /0.34-2.5mm ²		
Solid wire(AWG):	12-22		
Stranded wire(AWG):	12-22		
Torque :	3.5Lb-In	0.4N.m	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV 2.5KV
Safety Approval:	

VM




Pitch 5.08mm
Low profile
Poles 2p~24p
VMxx55510000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VM




Pitch 5.08mm
W/F, Low profile
Poles 2p~24p
VMxx55530000G*
Number of poles




Electrical:	cULus	VDE
Voltage rating:	300V	300V
Current rating:	12A	20A
Wire range:	0.34-2.5mm ²	
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque:	3.5Lb-In	0.4N.m

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV 2.5KV
Safety Approval:	

VM




Pitch 7.5mm
Low profile
Poles 2p~16p
VMxxA5510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VM




Pitch 7.5mm
W/F, Low profile
Poles 2p~16p
VMxxA5530000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

VM




Pitch 7.62mm
Low profile
Poles 2p~16p
VMxx05510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VM




Pitch 7.62mm
W/F, Low profile
Poles 2p~16p
VMxx05530000G*
Number of poles

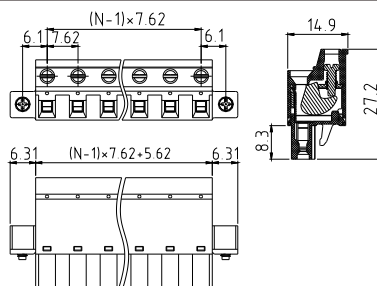


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In):	3.5

Screw:	M2.5
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 3.81mm
Poles 2p~24p
V8xx31500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 3.81mm
Flange with nut
Poles 2p~24p
V8xx31510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 3.81mm
Flange with screw
Poles 2p~24p
V8xx31520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 3.81mm-Flange with nut
Through the panel type
Poles 2p~18p
V8xx31530000G*
Number of poles

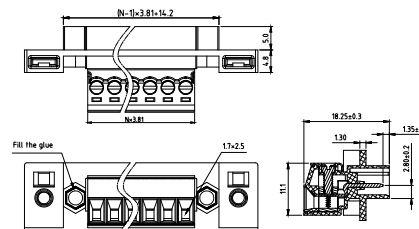


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-30
Stranded wire(AWG):	14-30
Torque(Lb-In):	2.6

Screw:	M2
Wire strip length:	7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 5.08mm
Poles 2p~24p
V8xx51500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 5.08mm
Flange with nut
Poles 2p~24p
V8xx51510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 5.08mm
Flange with screw
Poles 2p~24p
V8xx51520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 5.08mm-Flange with nut
Through the panel type
Poles 2p~18p
V8xx51530000G*
Number of poles

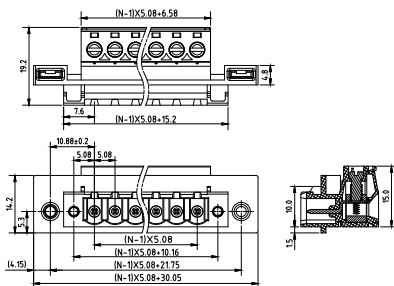


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 5.08mm-Flange with nut
Through the panel type With latch
Poles 2p~18p
V8xx51550000G*
Number of poles

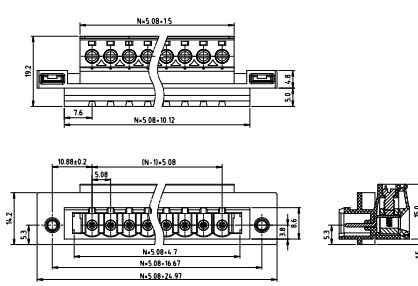


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.4

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 7.62mm
Poles 2p~16p
V8xx01500000G*
Number of poles

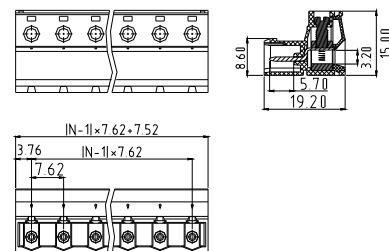


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 7.62mm
Flange with nut
Poles 2p~16p
V8xx01510000G*
Number of poles

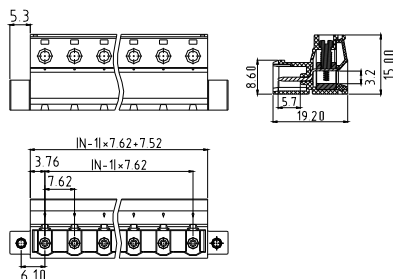


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

V8




Pitch 7.62mm
Flange with screw
Poles 2p~16p
V8xx01520000G*
Number of poles

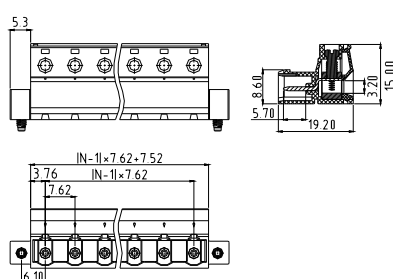


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI




Pitch 3.81mm
Poles 2p~24p
KIxx30500000G*
Number of poles
Match with AO 3.81 type pin

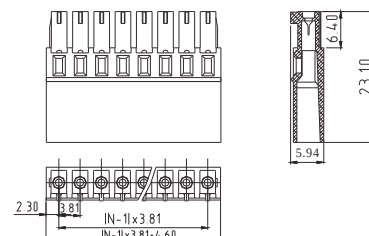


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI




Pitch 3.81mm-W/F
Poles 2p~24p
KIxx30520000G*
Number of poles
Match with AO 3.81 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI




Pitch 3.81mm
With high profile
Poles 2p~24p
KIxx30510000G*
Number of poles
Match with AO 3.81 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI




Pitch 3.81mm
W/F, With high profile
Poles 2p~24p
KIxx30530000G*
Number of poles
Match with AO 3.81 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	
Stranded wire(AWG):	18-20(0.5-1.0mm ²)
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KI




Pitch 5.08mm
Poles 2p~24p
KIxx50500000G*
Number of poles
Match with AO 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):	18-20	14-16
	(0.5-1.0mm ²)	(1.5-2.5mm ²)
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	

KI




Pitch 5.08mm-W/F
Poles 2p~24p
KIxx50520000G*
Number of poles
Match with AO 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):	18-20	14-16
	(0.5-1.0mm ²)	(1.5-2.5mm ²)
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	

KI




Pitch 5.08mm
With high profile
Poles 2p~24p
KIxx50510000G*
Number of poles
Match with AO 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):	18-20	14-16
	(0.5-1.0mm ²)	(1.5-2.5mm ²)
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	

KI




Pitch 5.08mm
W/F, With high profile
Poles 2p~24p
KIxx50530000G*
Number of poles
Match with AO 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	300V
Current rating:	8A	10A
Wire range:		
Solid wire(AWG):		
Stranded wire(AWG):	18-20	14-16
	(0.5-1.0mm ²)	(1.5-2.5mm ²)
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	

KV




Pitch 5.08mm
With hook & Low profile
Poles 2p~24p
KVxx50500000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus) pending	

KV




Pitch 5.08mm
Flange with screw & Low profile
Poles 2p~24p
KVxx50510000G*
Match with AR 5.08 type pin




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	10A	
Wire range:	1.5-2.5mm ²	
Solid wire(AWG):		
Stranded wire(AWG):		
Torque(Lb-In) :		
Screw:		
Wire strip length:		
Withstanding Voltage:	1.6KV	
Safety Approval:	(cULus) pending	

KV




Pitch 5.08mm
Flange with nut & Low profile
Poles 2p~24p
KVxx50520000G*
Match with AR 5.08 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	1.5-2.5mm ²
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

KV




Pitch 5.08mm
With hook & High profile
Poles 2p~24p
KVxx50530000G*
Match with AR 5.08 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	1.5-2.5mm ²
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

KV




Pitch 5.08mm
Flange with screw & High profile
Poles 2p~24p
KVxx50540000G*
Match with AR 5.08 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	1.5-2.5mm ²
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

KV



Pitch 5.08mm
Flange with nut & High profile
Poles 2p~24p
KVxx50550000G*
Match with AR 5.08 type pin




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	1.5-2.5mm ²
Solid wire(AWG):	
Stranded wire(AWG):	
Torque(Lb-In) :	

Screw:	
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

AO



Match with KI 3.81
AO0000000000G*
With wire range(0.5-1.0mm²)

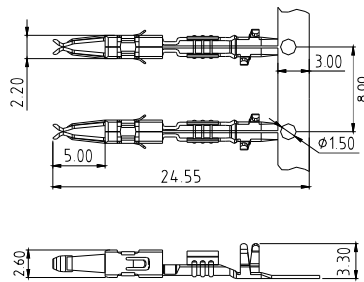


Used Wire range:	0.5-1.0mm ²
Stranded wire(AWG):	18-20
Current is 6A to 8A	
Wire strip length:	4.0mm
Core diameter including insulation:0.18 mm ...0.25 mm	

AO




Match with KI 5.08
AO0000100000G*
With wire range(0.5-1.0mm²)




Used Wire range:	0.5-1.0mm ²
Stranded wire(AWG):	18-20
Current up to 10A	
Wire strip length:	4.0mm
Core diameter including insulation:1.8 mm ... 2.1 mm	

AO



Match with KI 5.08
AO0000200000G*
With wire range(1.5-2.5mm²)




Used Wire range:	1.5-2.5mm ²
Stranded wire(AWG):	14-16
Current up to 12A	
Wire strip length:	4.0mm
Core diameter including insulation:2.11 mm ... 3.1 mm	

AR




Match with KV 5.08
AR0000000000G*
With wire range(1.5-2.5mm²)




Used Wire range:	1.5-2.5mm ²
Stranded wire(AWG):	14-16
Current up to 12A	
Wire strip length:	7.0mm
Core diameter including insulation:2.11 mm ... 3.1 mm	

EZ




Pitch 5.0mm
Poles 2p~24p
EZxx71500000G*
Number of poles

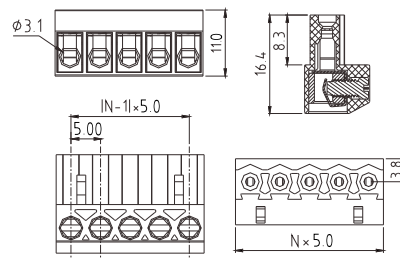


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EZ




Pitch 5.0mm-W/F
Poles 2p~24p
EZxx71520000G*
Number of poles

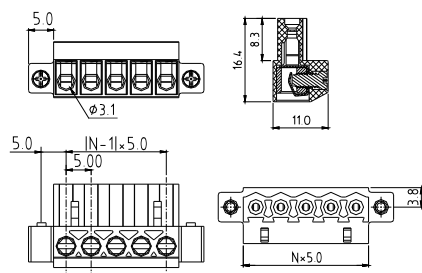


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EZ




Pitch 5.08mm
Poles 2p~24p
EZxx51500000G*
Number of poles

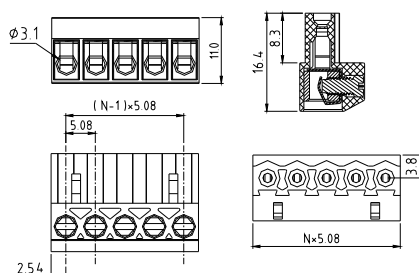


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EZ




Pitch 5.08mm-W/F
Poles 2p~24p
EZxx51520000G*
Number of poles

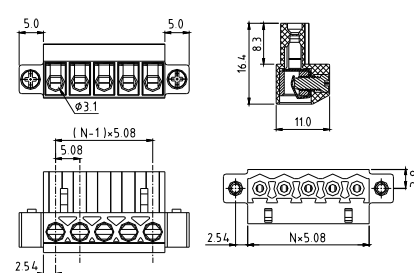


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VR




Pitch 5.08mm
Contact on down side
Poles 2p~24p
VRxx5150000G*
Number of poles

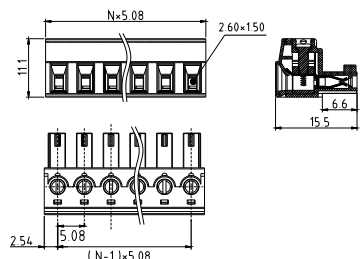


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	10A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	14-30	
Stranded wire(AWG):	14-30	
Torque :	2.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	7-8mm	
Rated impulse Voltage:	4.0KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

VR




Pitch 5.08mm-W/F
Contact on down side
Poles 2p~24p
VRxx51520000G*
Number of poles

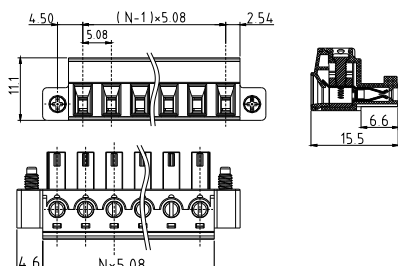


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	10A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	14-30	
Stranded wire(AWG):	14-30	
Torque :	2.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	7-8mm	
Rated impulse Voltage:	4.0KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

VR




Pitch 5.08mm
Contact on up side
Poles 2p~24p
VRxx51510000G*
Number of poles

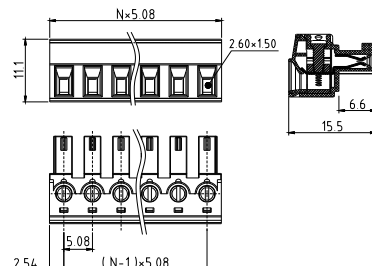


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	10A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	14-30	
Stranded wire(AWG):	14-30	
Torque :	2.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	7-8mm	
Rated impulse Voltage:	4.0KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

VR




Pitch 5.08mm-W/F
Contact on up side
Poles 2p~24p
VRxx51530000G*
Number of poles

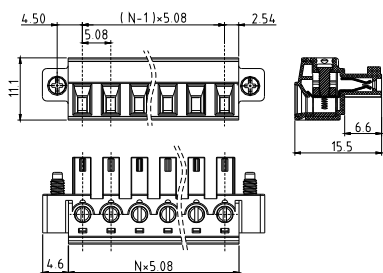


Electrical:	cULus	TUV
Voltage rating:	300V	250V
Current rating:	10A	17.5A
Wire range:	0.2-1.5mm ²	
Solid wire(AWG):	14-30	
Stranded wire(AWG):	14-30	
Torque :	2.0Lb-In	0.2N.m
Screw:	M2	
Wire strip length:	7-8mm	
Rated impulse Voltage:	4.0KV	
Withstanding Voltage:	1.6KV	
Safety Approval:		

EM



Pitch 5.0mm
Poles 2p~24p
EMxx71500000G*
Number of poles




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	12A	
Wire range:		
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque(Lb-In) :	4.0	
Screw:	M3	
Wire strip length:	7-8mm	
Withstanding Voltage:	1.6KV	
Safety Approval:		

EM




Pitch 5.0mm-W/F
Poles 2p~24p
EMxx71520000G*
Number of poles




Electrical:	cULus	
Voltage rating:	300V	
Current rating:	12A	
Wire range:		
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque(Lb-In) :	4.0	
Screw:	M3	
Wire strip length:	7-8mm	
Withstanding Voltage:	1.6KV	
Safety Approval:		

EM




Pitch 5.08mm
Poles 2p~24p
EMxx5150000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM




Pitch 5.08mm-W/F
Poles 2p~24p
EMxx51520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM




Pitch 7.5mm
Poles 2p~16p
EMxxA1500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM




Pitch 7.5mm-W/F
Poles 2p~16p
EMxxA1520000G*
Number of poles

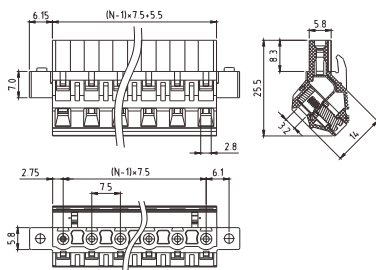


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-22
Stranded wire(AWG):	12-22
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EM




Pitch 7.62mm
Poles 2p~16p
EMxx01500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	4.0Lb-In	0.45N.m
Screw:	M3	
Wire strip length:	7-8mm	
Withstanding Voltage:	1.6KV	
Impulse Voltage(II/2):		6KV
Safety Approval:	cULus	TUV

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Impulse Voltage(II/2):	6KV
Safety Approval:	cULus

EM



Pitch 7.62mm-W/F
Poles 2p~16p
EMxx01520000G*
Number of poles

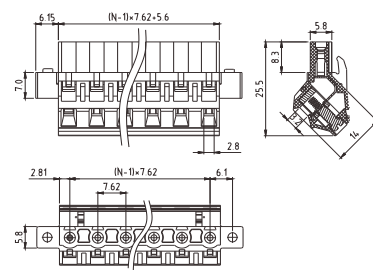


Electrical:	cULus	TUV
Voltage rating:	300V	750V
Current rating:	12A	20A
Wire range:		0.34-2.5mm ²
Solid wire(AWG):	12-22	
Stranded wire(AWG):	12-22	
Torque :	4.0Lb-In	0.45N.m
Screw:	M3	
Wire strip length:	7-8mm	
Withstanding Voltage:	1.6KV	
Impulse Voltage(II/2):		6KV
Safety Approval:	cULus	TUV

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Impulse Voltage(II/2):	6KV
Safety Approval:	cULus

EY




Pitch 5.08mm
Hook on entry side
Poles 2p~24p
EYxx510A0000G*
Number of poles

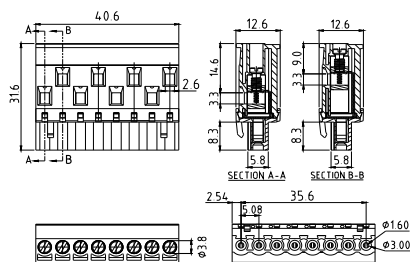


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.0

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

K5




Pitch 5.08mm(Without flange)
Poles 2p~24p
K5xx51500000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

K5




Pitch 5.08mm(With flange)
Poles 2p~24p
K5xx51510000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

K5




Pitch 5.08mm(With latch)
Poles 2p~24p
K5xx51520000G*




Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	6-7mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

VH



Pitch 5.08mm
Poles 2p~24p
VHxx51500000G*
Number of poles

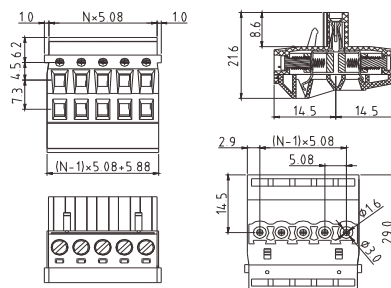


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VH




Pitch 5.08mm-W/F
Poles 2p~24p
VHxx51520000G*
Number of poles

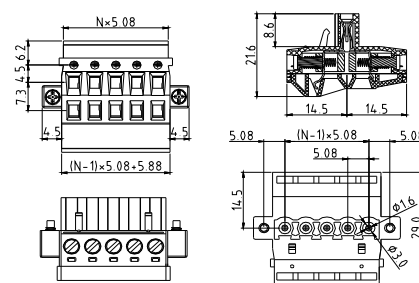


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	12-24
Stranded wire(AWG):	12-24
Torque(Lb-In) :	4.3

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

E5 - Screw type




Pitch 6.35mm
Poles 2*3p~2*24p
E5xx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	14-20
Stranded wire(AWG):	14-20
Torque:	5.0Kgf.cm

Screw:	M2.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.5KV
Safety Approval:	(cULus) pending

VB




Pitch 7.62mm
Poles 2p~16p
VBxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In):	4.5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

VB




Pitch 7.62mm-W/F
Poles 2p~16p
VBxx01520000G*
Number of poles

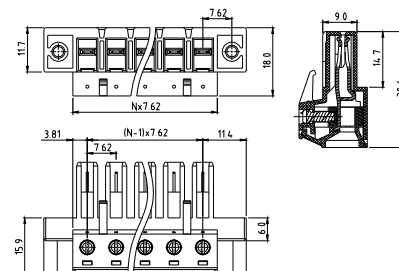


Electrical:	cULus
Voltage rating:	300V
Current rating:	20A
Wire range:	
Solid wire(AWG):	10-30
Stranded wire(AWG):	10-30
Torque(Lb-In):	4.5

Screw:	M3
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus)

ET




Pitch 7.62mm-Match VC series
Poles 2p~16p
ETxx02500000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:		0.2-6mm ²
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque:	7Lb-In	0.8N.m

Screw:	M3.5
Wire strip length:	10-11mm
Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) TÜV

ET




Pitch 7.62mm
W/F Match VC series
Poles 2p~16p
ETxx02520000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:		0.2-6mm ²
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque :	7Lb-In	0.8N.m

Screw:	M3.5
Wire strip length:	10-11mm
Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) TÜV

ET




Pitch 7.62mm
W/F(With handle) Match VC series
Poles 3p/4p
ETxx02530000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	800V
Current rating:	32A	32A
Wire range:		0.2-6mm ²
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque :	7Lb-In	0.8N.m

Screw:	M3.5
Wire strip length:	10-11mm
Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) TÜV

ET




Pitch 7.62mm Match KT series
Poles 2p~16p
ETxx025A0000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque:	9Lb-In

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

ET




Pitch 7.62mm
W/F Match KT series
Poles 2p~16p
ETxx025C0000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque:	9Lb-In

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

ET



Pitch 7.62mm
W/F(With handle) Match KT series
Poles 3p/4p
ETxx025D0000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque:	9Lb-In

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

ET




Pitch 7.62mm
With latch Match KT series
Poles 2p~12p
ETxx015B0000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque:	9Lb-In

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

ET




Pitch 7.62mm Match VC series
Poles 2p~16p
ETxx025E0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		0.2-6mm ²
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque :	11.4Lb-In	0.8N.m
Screw:	M3.5	
Wire strip length:	10-11mm	
Rated Impulse Voltage:		6.0KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	△

Screw:	M3.5
Wire strip length:	10-11mm
Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

ET




Pitch 7.62mm
W/F Match VC series
Poles 2p~16p
ETxx025G0000G*
Number of poles




Electrical:	cULus	TUV
Voltage rating:	300V	600V
Current rating:	41A	41A
Wire range:		0.2-6mm ²
Solid wire(AWG):	8-24	
Stranded wire(AWG):	8-24	
Torque :	11.4Lb-In	0.8N.m
Screw:	M3.5	
Wire strip length:	10-11mm	
Rated Impulse Voltage:		6.0KV
Withstanding Voltage:	1.6KV	
Safety Approval:	cULus	△

Screw:	M3.5
Wire strip length:	10-11mm
Rated Impulse Voltage:	6.0KV
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KT




Pitch 7.62mm
Poles 2p~16p
KTxx0150000G*
Number of poles

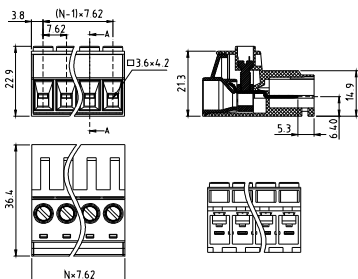


Electrical:	cULus
Voltage rating:	300V(KS) 600V(ET)
Current rating:	41A 41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.2KV
Safety Approval:	cULus

KT




Pitch 7.62mm
With flange screw type
Poles 2p~16p
KTxx01540000G*
Number of poles

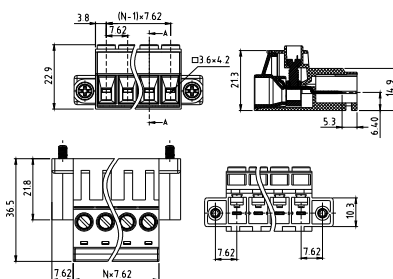


Electrical:	cULus
Voltage rating:	300V(KS) 600V(ET)
Current rating:	41A 41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.2KV
Safety Approval:	cULus

KT




Pitch 7.62mm
With flange screw type & W/handle
Poles 3p/4p
KTxx01550000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V(KS) 600V(ET)
Current rating:	41A 41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV 2.2KV
Safety Approval:	cULus

KT




Pitch 7.62mm
With flange nut type
Poles 2p~16p
KTxx01520000G*
Number of poles

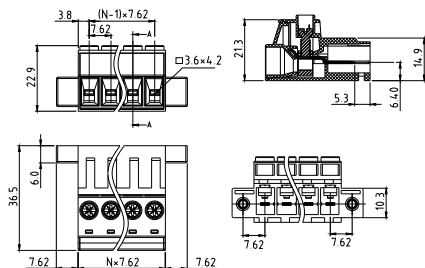


Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KT




Pitch 7.62mm
With flange nut type & W/handle
Poles 3p/4p
KTxx01530000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KT




Pitch 7.62mm
Flange with nut Through the panel type
Poles 2p~12p
KTxx015D0000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	41A
Wire range:	
Solid wire(AWG):	8-24
Stranded wire(AWG):	8-24
Torque(Lb-In) :	9

Screw:	M3.5
Wire strip length:	10-11mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

EV




Pitch 10.16mm
Poles 2p~12p
EVxx61500000G*
Number of poles

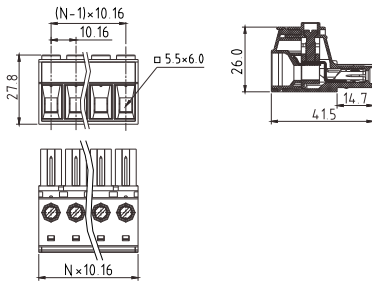


Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	10.4

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EV




Pitch 10.16mm-W/F
Poles 2p~12p
EVxx61510000G*
Number of poles

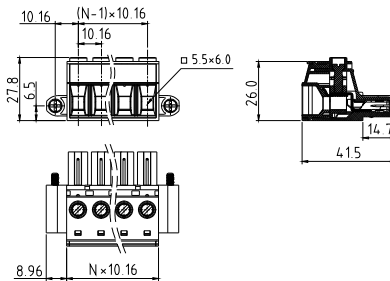


Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	10.4

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

EV




Pitch 10.16mm-W/F(With handle)
Poles 3p/4p
EVxx61520000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	10.4

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KK




Pitch 10.16mm
Poles 2p~12p
KKxx61500000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V(KL) 600V(KJ)
Current rating:	55A 55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV 2.2KV
Safety Approval:	cULus

KK




Pitch 10.16mm-Flange with screw
Poles 2p~12p
KKxx61510000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KK




Pitch 10.16mm
Flange with screw(With handle)
Poles 3p/4p
KKxx61520000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KK




Pitch 10.16mm-Flange with nut
Poles 2~12p
KKxx61530000G*
Number of poles

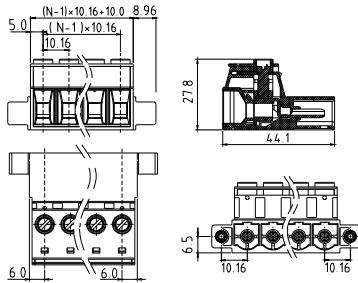


Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KK




Pitch 10.16mm
Flange with nut(With handle)
Poles 3p/4p
KKxx61540000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	55A
Wire range:	
Solid wire(AWG):	6-20
Stranded wire(AWG):	6-20
Torque(Lb-In):	18

Screw:	M4.5
Wire strip length:	13-14mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KX




Pitch 15.0mm
Poles 2p~10p
KXxxC150000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	31.5

Screw:	M5
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KX




Pitch 15.0mm
With flange
Poles 2p~10p
KXxxC1510000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	31.5

Screw:	M5
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

KX



Pitch 15.0mm
With flange and handle
Poles 4p
KX04C1520000G*
Number of poles




Electrical:	cULus
Voltage rating:	600V
Current rating:	115A
Wire range:	
Solid wire(AWG):	2-20
Stranded wire(AWG):	2-20
Torque(Lb-In):	31.5

Screw:	M5
Wire strip length:	19-20mm
Withstanding Voltage:	2.2KV
Safety Approval:	cULus

HU




Pitch 5.08mm
Poles 2p~8p
HUxx01000000G*
Number of poles

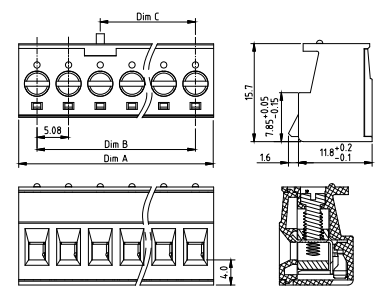


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Torque:	0.6N.m

Screw:	M3
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

Spring Clamp Plugs for Pluggable System

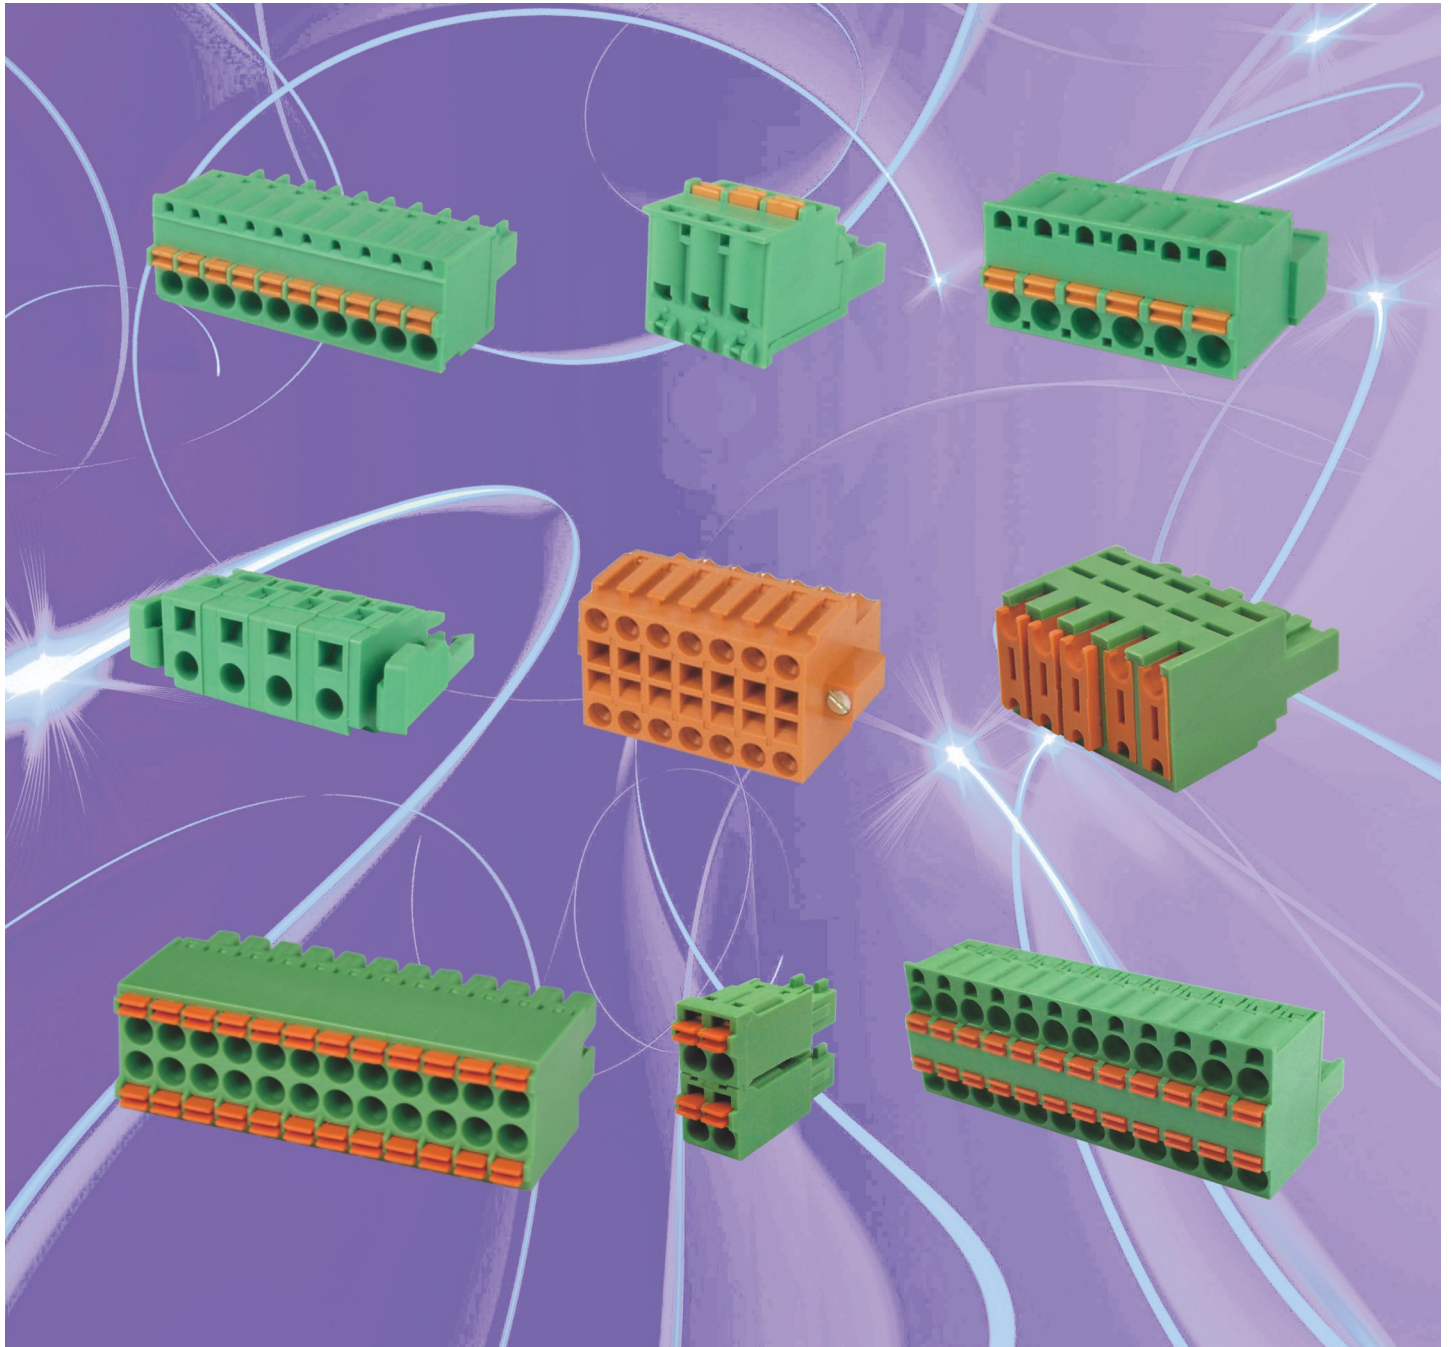


G

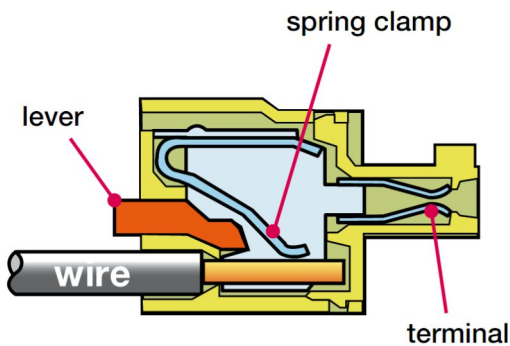


Pitch: 2.5, 3.5, 3.81, 5.0, 5.08, 6.35, 7.5, 7.62
Rated Voltage Range(cULus) :150V-300V
Rated Current Range(cULus): 4A-15A

HW




Pitch 2.5mm
Poles 2p~24p
HWxxB0500000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	4A
Wire range:	
Solid wire(AWG):	20-28
Stranded wire(AWG):	20-28
Wire strip length:	7-8mm
Withstanding Voltage:	1.3KV
Safety Approval:	

HW




Pitch 3.5mm
Poles 2p~24p
HWxx10500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW




Pitch 3.5mm-W/F
Poles 2p~24p
HWxx10520000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW




Pitch 3.81mm
Poles 2p~24p
HWxx30500000G*
Number of poles

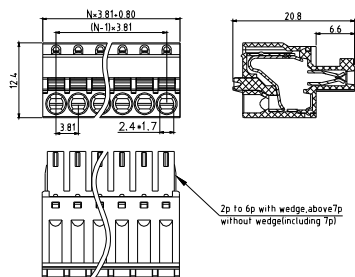


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW




Pitch 3.81mm-W/F
Poles 2p~24p
HWxx30520000G*
Number of poles

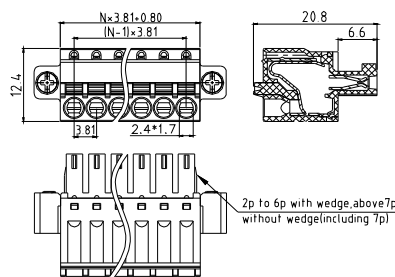


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	14-28
Stranded wire(AWG):	14-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW




Pitch 5.0mm
Contact on down side
Poles 2p~24p
HWxx70500000G*
Number of poles

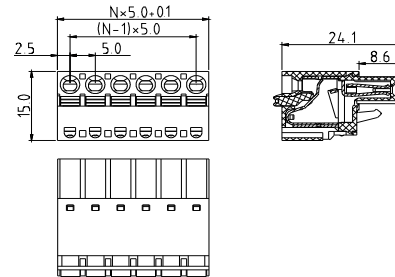


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW




Pitch 5.0mm-W/F
Contact on down side
Poles 2p~24p
HWxx70520000G*
Number of poles

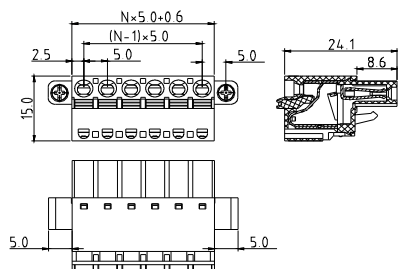


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.0mm
Contact on up side
Poles 2p~24p
HWxx70510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.0mm-W/F
Contact on up side
Poles 2p~24p
HWxx70530000G*
Number of poles

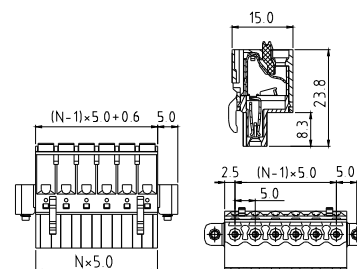


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.08mm
Contact on down side
Poles 2p~24p
HWxx50500000G*
Number of poles

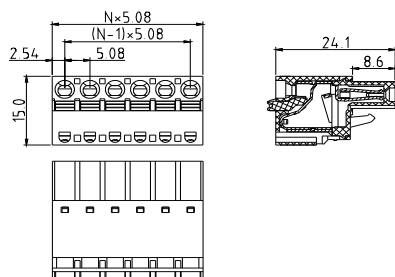


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.08mm-W/F
Contact on down side
Poles 2p~24p
HWxx50520000G*
Number of poles

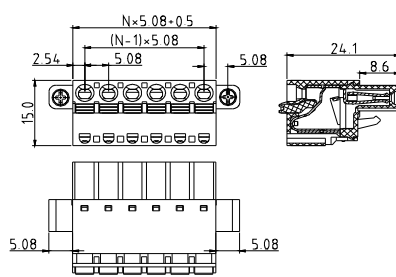


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.08mm-W/latch
Contact on down side
Poles 2p~24p
HWxx50560000G*
Number of poles

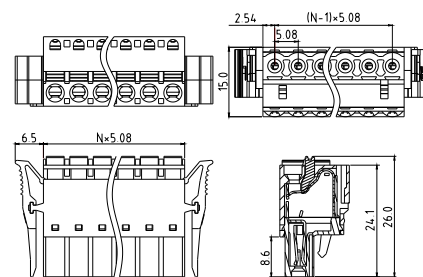


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.08mm
Contact on up side
Poles 2p~24p
HWxx50510000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.08mm-W/F
Contact on up side
Poles 2p~24p
HWxx50530000G*
Number of poles

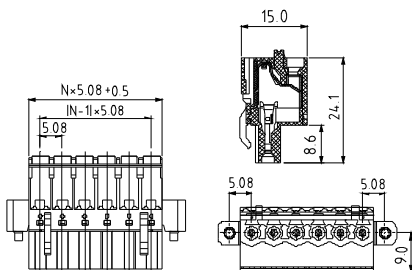


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 5.08mm
Contact in the middle
Poles 2p~24p
HWxx50540000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW




Pitch 5.08mm-W/F
Contact in the middle
Poles 2p~24p
HWxx50550000G*
Number of poles

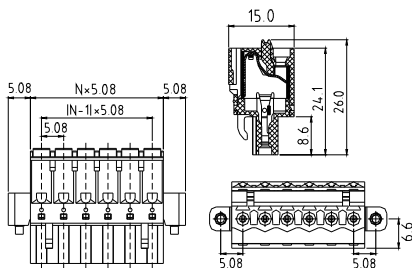


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HW



Pitch 5.08mm-Hook on back side
Contact on down side
Poles 2p~24p
HWxx5080F000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 7.5mm
Contact on down side
Poles 2p~16p
HWxxA0500000G*
Number of poles

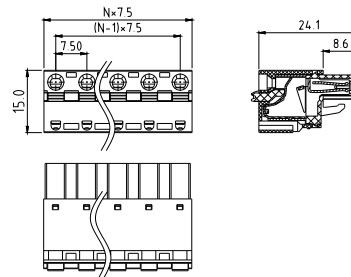


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 7.5mm-W/F
Contact on down side
Poles 2p~16p
HWxxA0520000G*
Number of poles

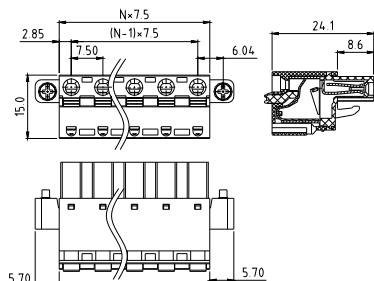


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 7.62mm
Contact on down side
Poles 2p~16p
HWxx00520000G*
Number of poles

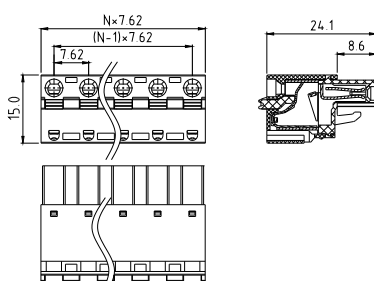


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HW




Pitch 7.62mm-W/F
Contact on down side
Poles 2p~16p
HWxx00520000G*
Number of poles

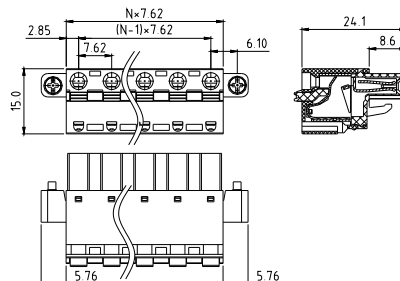


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NL




Pitch 3.5mm(With flange)
Poles 2*2p~2*24p
NLxx1051xxxxG*
Number of poles

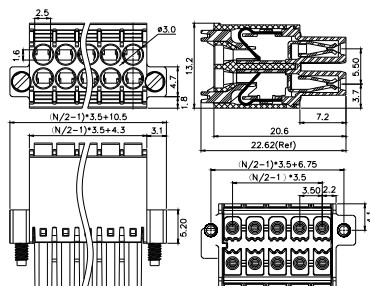


Electrical:	cULus
Voltage rating:	300V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NL




Pitch 3.5mm(W/O flange)
Poles 2*2p~2*24p
NLxx1052xxxxG*
Number of poles

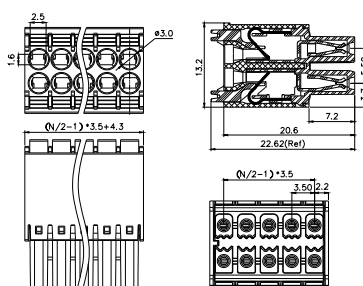


Electrical:	cULus
Voltage rating:	300V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NL




Pitch 3.5mm
With operating lever
Poles 2*2p~2*14p
NLxx1153xxxxG*
Number of poles

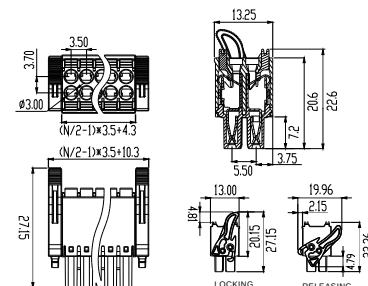


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NL




Pitch 3.5mm
With operating lever
Poles 2~18p
NL3610030000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NL




Pitch 3.5mm
With operating lever
Poles 2~18p
NL3611030000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HN




Pitch 3.5mm-W/O flange
Poles 2~24p
HNxx10300000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HN




Pitch 3.5mm-W/flange
Poles 2~24p
HNxx10320000G*
Number of poles

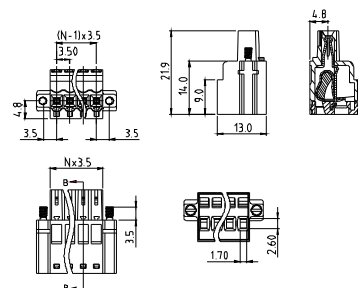


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HN




Pitch 5.08mm
Poles 2p~24p
HNxx50500000G*
Number of poles

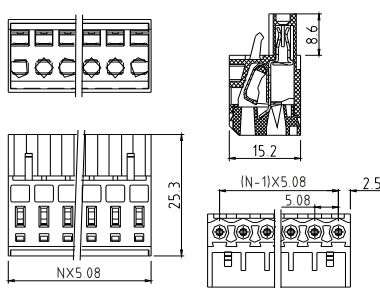


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	14-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HN




Pitch 5.08mm-W/F
Poles 2p~24p
HNxx50520000G*
Number of poles

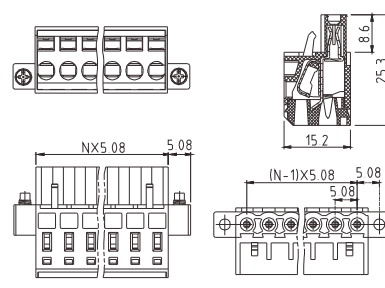


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	14-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 3.5mm
Poles 2p~24p
H5xx10500000G*
Number of poles

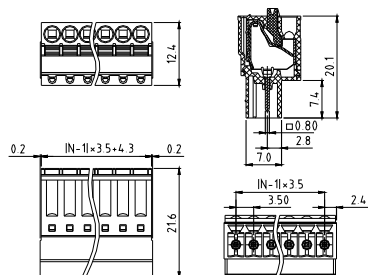


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 3.5mm
Flange with nut
Poles 2p~24p
H5xx10520000G*
Number of poles

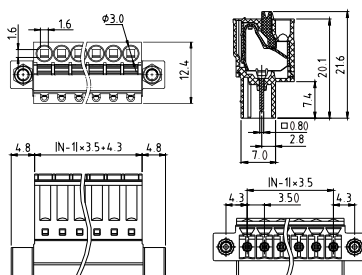


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 3.5mm
Flange with screw
Poles 2p~24p
H5xx10510000G*
Number of poles

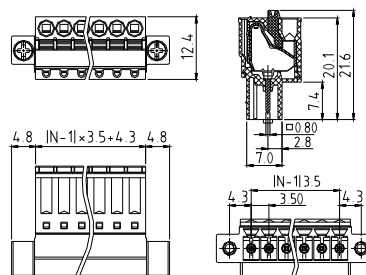


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 3.81mm
Poles 2p~24p
H5xx30500000G*
Number of poles

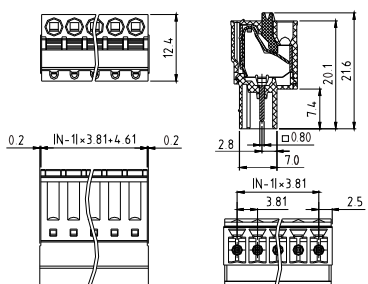


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 3.81mm
Flange with nut
Poles 2p~24p
H5xx30520000G*
Number of poles

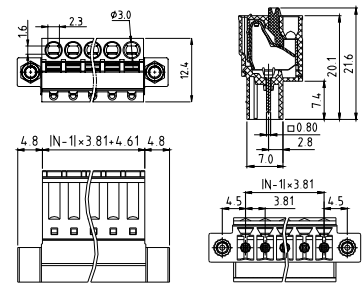


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 3.81mm
Flange with screw
Poles 2p~24p
H5xx30510000G*
Number of poles

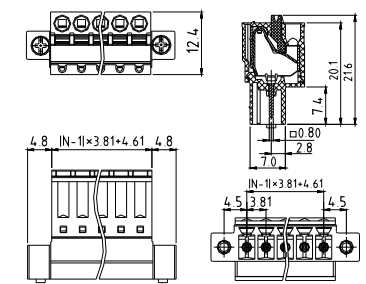


Electrical:	cULus
Voltage rating:	300V
Current rating:	4A
Wire range:	
Solid wire(AWG):	16-28
Stranded wire(AWG):	16-28
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 5.0mm
Poles 2p~24p
H5xx70500000G*
Number of poles

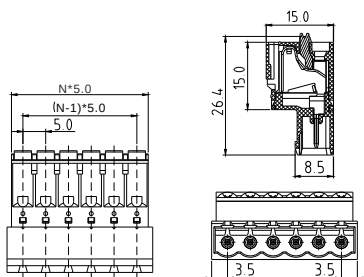


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 5.0mm
Flange with nut
Poles 2p~24p
H5xx70520000G*
Number of poles

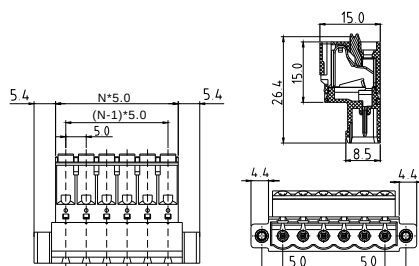


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 5.0mm
Flange with screw
Poles 2p~24p
H5xx70510000G*
Number of poles

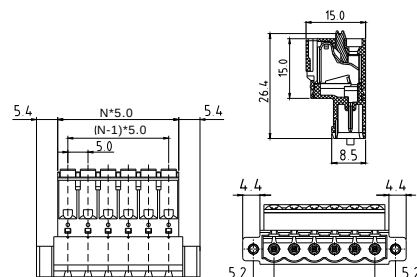


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 5.08mm
Poles 2p~24p
H5xx50500000G*
Number of poles

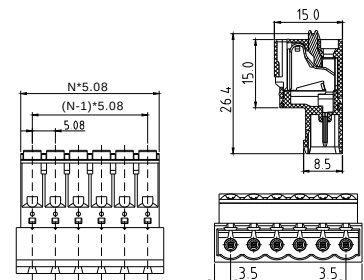


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 5.08mm
Flange with nut
Poles 2p~24p
H5xx50520000G*
Number of poles

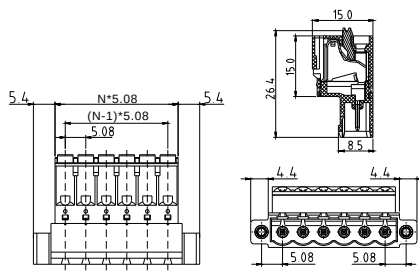


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 5.08mm
Flange with screw
Poles 2p~24p
H5xx50510000G*
Number of poles

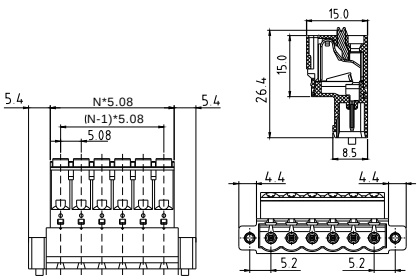


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	

H5




Pitch 7.5mm
Poles 2p~16p
H5xxA0500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 7.5mm
Flange with nut
Poles 2p~16p
H5xxA0520000G*
Number of poles

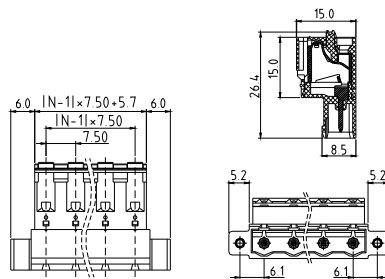


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 7.5mm
Flange with screw
Poles 2p~16p
H5xxA0510000G*
Number of poles

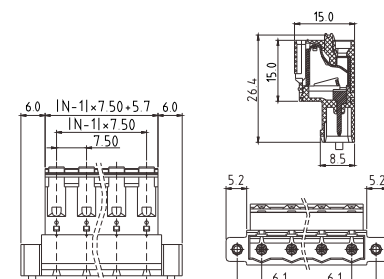


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 7.62mm
Poles 2p~16p
H5xx00500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 7.62mm
Flange with nut
Poles 2p~16p
H5xx00520000G*
Number of poles

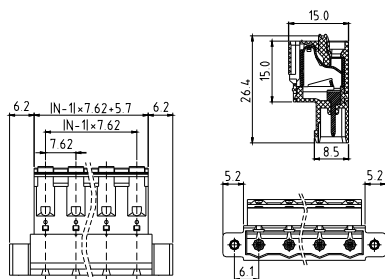


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H5




Pitch 7.62mm
Flange with screw
Poles 2p~16p
H5xx00510000G*
Number of poles

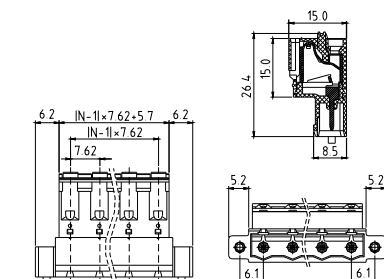


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VW




Pitch 3.5mm-W/O flange
Poles 2*2p~2*24p
VWxx10300000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-28
Stranded wire(AWG):	18-28
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

VW



Pitch 3.5mm-W/flange
Poles 2*2p~2*24p
VWxx10310000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-28
Stranded wire(AWG):	18-28
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KD




Pitch 2.54mm
Poles 2p~16p
KDxxB0xx0000G*
Number of poles




Electrical:	cULus
Voltage rating:	150V
Current rating:	6A
Wire range:	
Solid wire(AWG):	20-26
Stranded wire(AWG):	20-26
Wire strip length:	6-7mm
Withstanding Voltage:	1.3KV
Safety Approval:	cULus

KD




Pitch 3.5mm
Poles 2p~24p
KDxx10500000G*
Number of poles

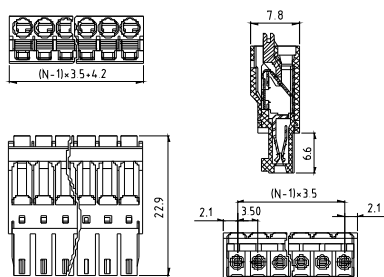


Electrical:	cULus
Voltage rating:	160V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.32KV
Safety Approval:	cULus

KD




Pitch 3.5mm-W/F
Poles 2p~24p
KDxx10510000G*
Number of poles

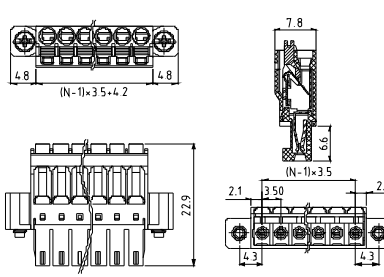


Electrical:	cULus
Voltage rating:	160V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.32KV
Safety Approval:	cULus

KD




Pitch 3.5mm
With latch
Poles 2p~24p
KDxx10520000G*
Number of poles

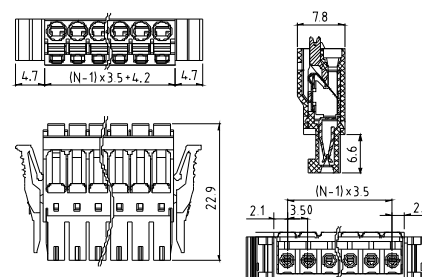


Electrical:	cULus
Voltage rating:	160V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.32KV
Safety Approval:	cULus

KD




Pitch 3.5mm
W/O flange (Double level)
Poles 2*2p~2*24p
KDxx1050A000G*
Number of poles




Electrical:	cULus
Voltage rating:	160V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.32KV
Safety Approval:	cULus

KD




Pitch 3.5mm
W/flange (Double level)
Poles 2*2p~2*24p
KDxx1051A000G*
Number of poles




Electrical:	cULus
Voltage rating:	160V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.32KV
Safety Approval:	cULus

KD




Pitch 3.5mm
With latch (Double level)
Poles 2*2p~2*24p
KDxx1052A000G*
Number of poles




Electrical:	cULus
Voltage rating:	160V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.32KV
Safety Approval:	cULus

KD




Pitch 3.81mm
Poles 2p~24p
KDxx30500000G*
Number of poles

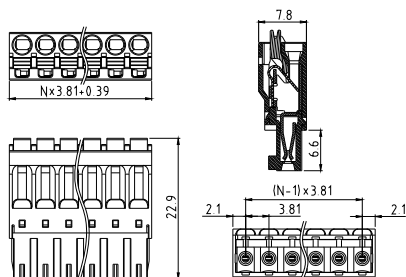


Electrical:	cULus
Voltage rating:	300V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KD




Pitch 3.81mm-W/flange
Poles 2p~24p
KDxx30510000G*
Number of poles

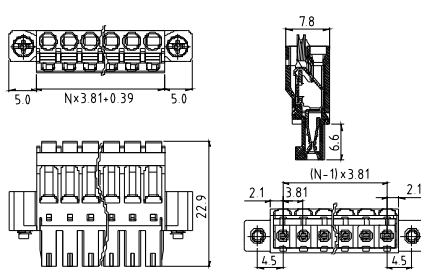


Electrical:	cULus
Voltage rating:	300V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KD




Pitch 3.81mm-With latch
Poles 2p~24p
KDxx30520000G*
Number of poles

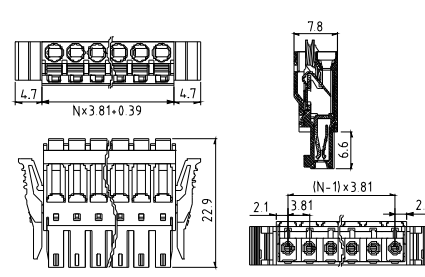


Electrical:	cULus
Voltage rating:	300V
Current rating:	5.5A
Wire range:	
Solid wire(AWG):	16-24
Stranded wire(AWG):	16-24
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

KD




Pitch 5.0mm
Poles 2p~24p
KDxx7050000G*
Number of poles

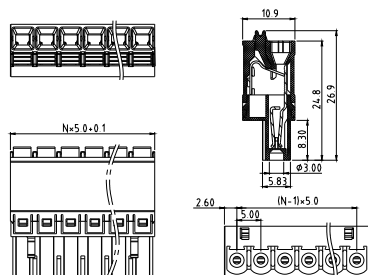


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KD




Pitch 5.0mm-W/flange
Poles 2p~24p
KDxx70510000G*
Number of poles

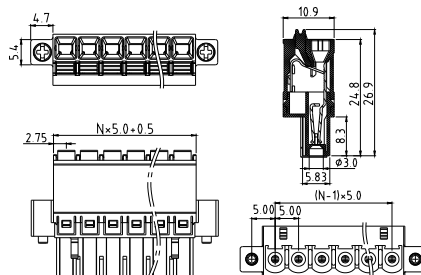


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KD




Pitch 5.0mm-With latch
Poles 2p~24p
KDxx70520000G*
Number of poles

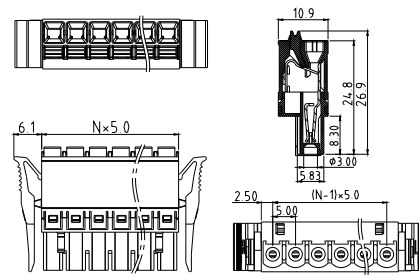


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KD




Pitch 5.08mm
Poles 2p~24p
KDxx50500000G*
Number of poles

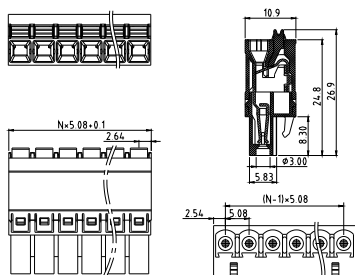


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KD




Pitch 5.08mm-W/flange
Poles 2p~24p
KDxx50510000G*
Number of poles

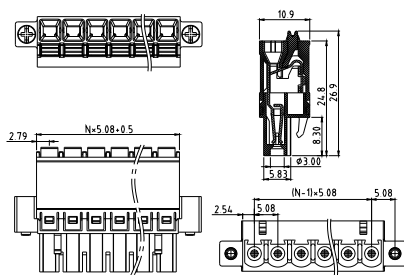


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

KD




Pitch 5.08mm-With latch
Poles 2p~24p
KDxx50520000G*
Number of poles

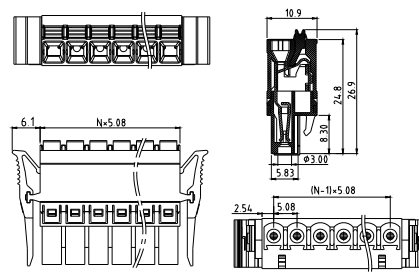


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	14-24
Stranded wire(AWG):	14-24
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	

ND




Pitch 3.5mm
Poles 2p~24p
NDxx10500000G*
Number of poles

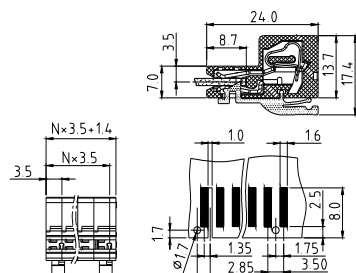


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-26
Stranded wire(AWG):	16-26
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending
With P.C.B thickness :	1.6±0.2mm

ND




Pitch 5.0mm
Poles 2p~24p
NDxx70500000G*
Number of poles

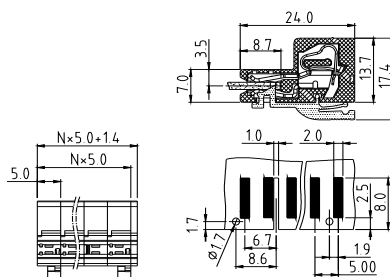


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus
With P.C.B thickness :	1.6±0.2mm

ND




Pitch 7.5mm
Poles 2p~16p
NDxxA0500000G*
Number of poles

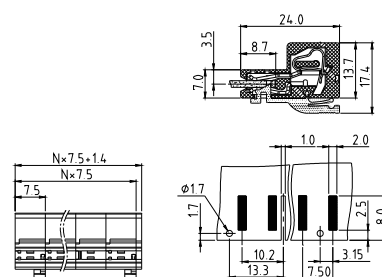


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	14-26
Stranded wire(AWG):	14-26
Wire strip length:	7-8mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus
With P.C.B thickness :	1.6±0.2mm

HP




Pitch 3.81mm
Poles 2p~24p
HPxx30500000G*
Number of poles

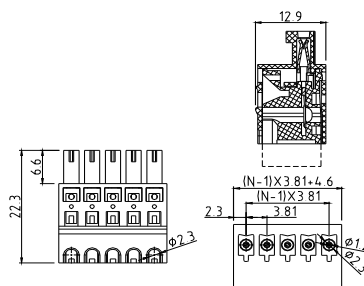


Electrical:	cULus
Voltage rating:	300V
Current rating:	5A
Wire range:	
Solid wire(AWG):	20-22
Stranded wire(AWG):	20-22
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HP




Pitch 3.81mm-W/F
Poles 2p~24p
HPxx30520000G*
Number of poles

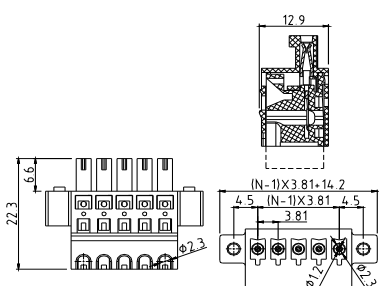


Electrical:	cULus
Voltage rating:	300V
Current rating:	5A
Wire range:	
Solid wire(AWG):	20-22
Stranded wire(AWG):	20-22
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HP




Pitch 5.08mm
Poles 2p~24p
HPxx50500000G*
Number of poles

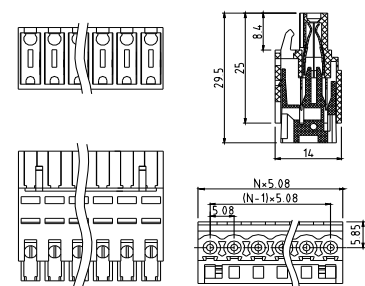


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-22
Stranded wire(AWG):	18-22
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HP




Pitch 5.08mm-W/F
Poles 2p~24p
HPxx50520000G*
Number of poles

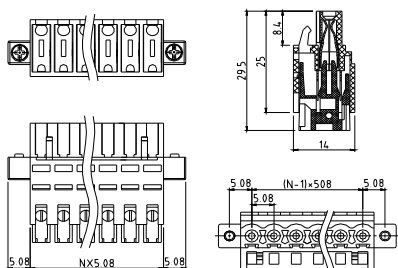


Electrical:	cULus
Voltage rating:	300V
Current rating:	7A
Wire range:	
Solid wire(AWG):	18-22
Stranded wire(AWG):	18-22
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	

HI




Pitch 5.0mm
With hook and pillar
Poles 2p~24p
HIxx00500000G*
Number of poles

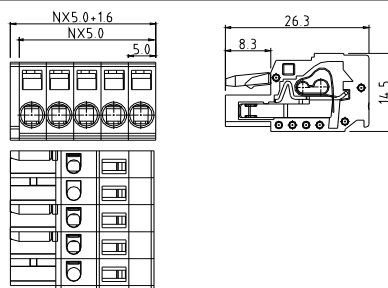


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HI




Pitch 5.0mm
With latch
Poles 2p~24p
HIxx00530000G*
Number of poles

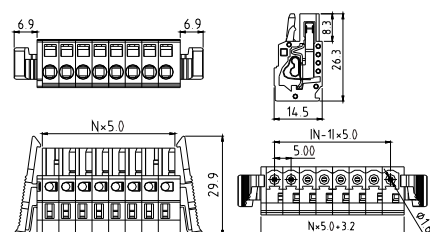


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HI




Pitch 5.0mm
With flange
Poles 2p~24p
HIxx00520000G*
Number of poles

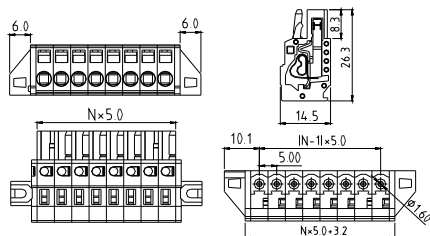


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

HI




Pitch 5.0mm
With hook, 100% protected against mismatching
Poles 2p~24p
HIxx01500000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	() pending

HI




Pitch 5.0mm
With latch, 100% protected against mismatching
Poles 2p~24p
HIxx01530000G*
Number of poles

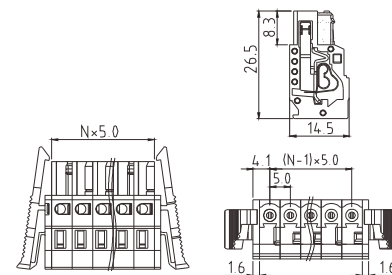


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	() pending

HI




Pitch 5.0mm-W/F
With flange, 100% protected against mismatching
Poles 2p~24p
HIxx01520000G*
Number of poles

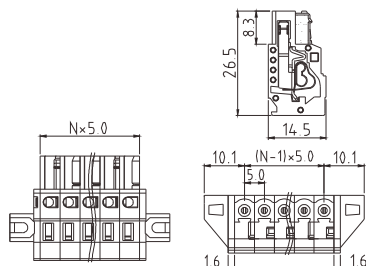


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.5mm
With hook and pillar
Poles 2p~16p
HIxx20500000G*
Number of poles

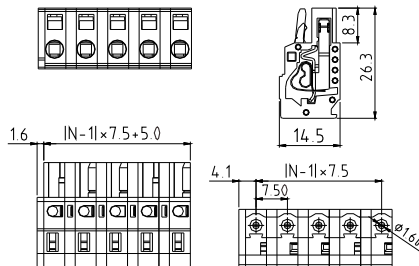


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.5mm
With latch
Poles 2p~16p
HIxx20530000G*
Number of poles

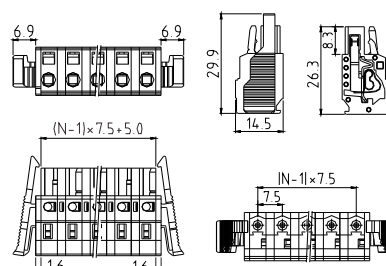


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.5mm
With flange
Poles 2p~16p
HIxx20520000G*
Number of poles

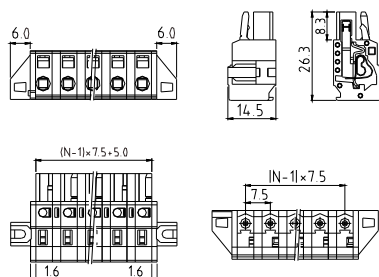


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.5mm
With hook, 100% protected against mismatching
Poles 2p~16p
HIxx21500000G*
Number of poles

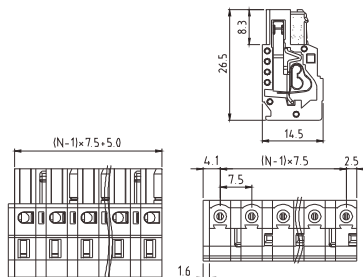


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.5mm
With flange, 100% protected against mismatching
Poles 2p~16p
HIxx21520000G*
Number of poles

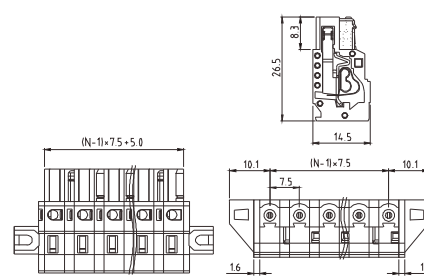


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.5mm
With latch, 100% protected against mismatching
Poles 2p~16p
HIxx21530000G*
Number of poles

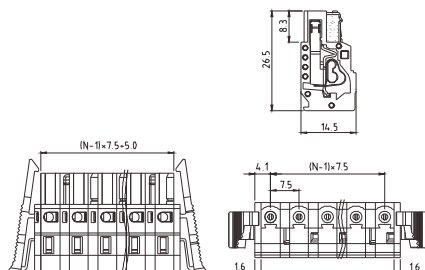


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

HI




Pitch 7.62mm
With hook and pillar
Poles 2p~16p
HIxx30500000G*
Number of poles

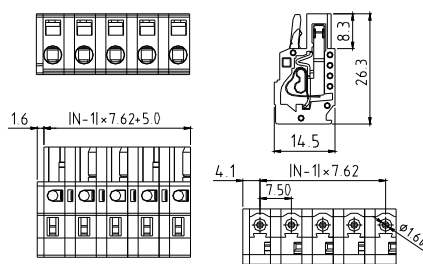


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HI



Pitch 7.62mm
With latch
Poles 2p~16p
HIxx30530000G*
Number of poles

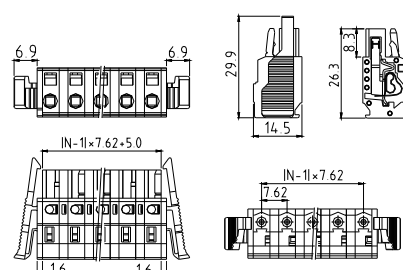


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HI




Pitch 7.62mm
With flange
Poles 2p~16p
HIxx30520000G*
Number of poles

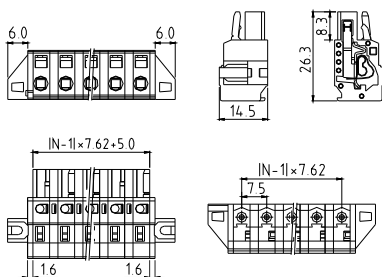


Electrical:	cULus
Voltage rating:	300V
Current rating:	15A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.0mm
Hook on entry side
Poles 2p~24p
H4xx705A0000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.0mm-W/F
Hook on entry side
Poles 2p~24p
H4xx705C0000G*
Number of poles

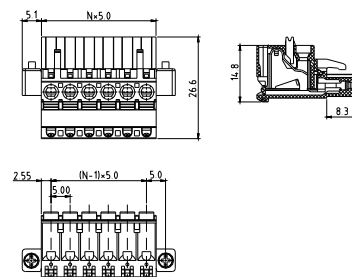


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.0mm
Hook on back side
Poles 2p~24p
H4xx705B0000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.0mm-W/F
Hook on back side
Poles 2p~24p
H4xx705D0000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.08mm
Hook on entry side
Poles 2p~24p
H4xx505A0000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.08mm-W/F
Hook on entry side
Poles 2p~24p
H4xx505C0000G*
Number of poles

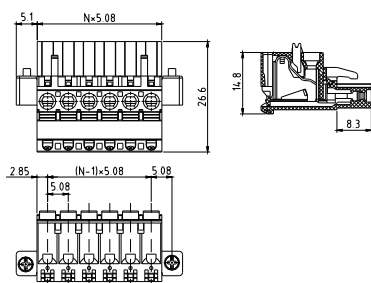


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.08mm
Hook on back side
Poles 2p~24p
H4xx505D0000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

H4




Pitch 5.08mm-W/F
Hook on back side
Poles 2p~24p
H4xx505B0000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

G

NB




Pitch 5.0mm
W/O flange
Poles 2p~24p
NBxx7080000G*
Number of poles

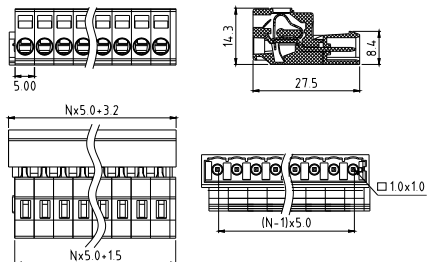


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NB




Pitch 5.0mm
W/flange
Poles 2p~24p
NBxx70810000G*
Number of poles

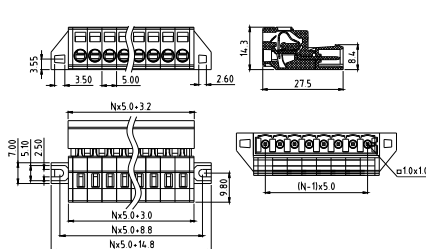


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NB




Pitch 5.0 mm
W/O flange, 100% protected against mismatching
Poles 2p~24p
NBxx70820000G*
Number of poles

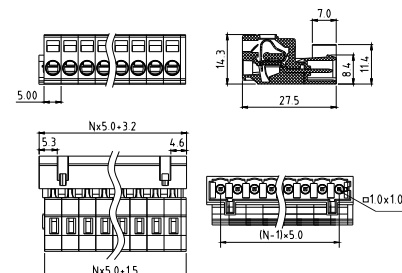


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NB




Pitch 5.0 mm
W/flange, 100% protected against mismatching
Poles 2p~24p
NBxx70830000G*
Number of poles

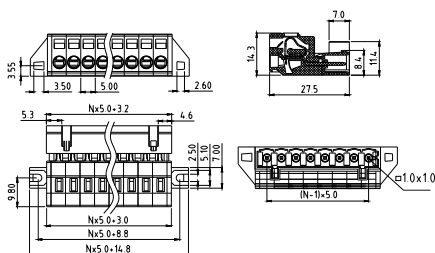


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NB




Pitch 5.0mm
Snap-in mounting feet
Poles 2p~24p
NBxx70840000G*
Number of poles

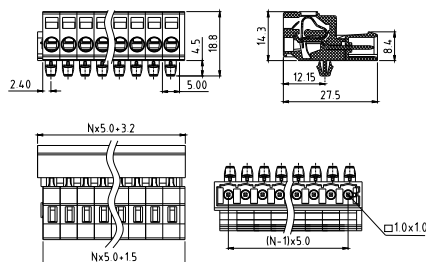


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NB




Pitch 5.0mm
Snap-in mounting feet,
100% protected against mismatching
Poles 2p~24p
NBxx70850000G*
Number of poles

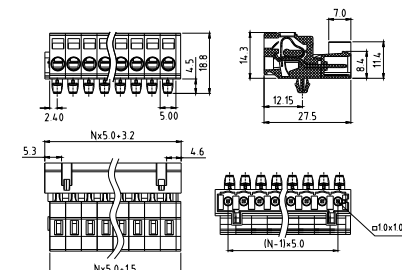


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	

NB




Pitch 7.5mm
W/O flange
Poles 2p~16p
NBxxA0800000G*
Number of poles

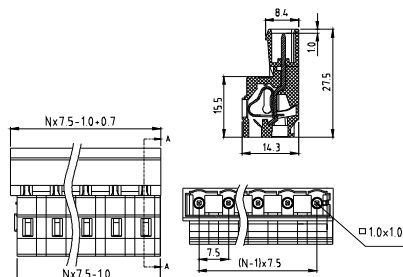


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

NB




Pitch 7.5mm
W/flange
Poles 2p~16p
NBxxA0810000G*
Number of poles

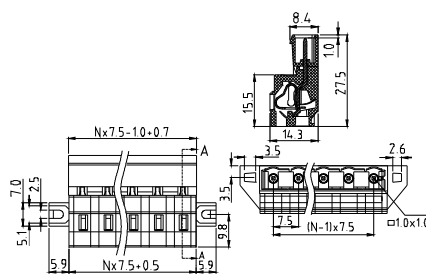


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

NB




Pitch 7.5mm
W/O flange, 100% protected against mismatching
Poles 2p~16p
NBxxA0820000G*
Number of poles

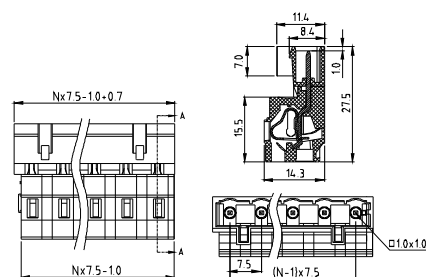


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

NB




Pitch 7.5mm
W/flange, 100% protected against mismatching
Poles 2p~16p
NBxxA0830000G*
Number of poles

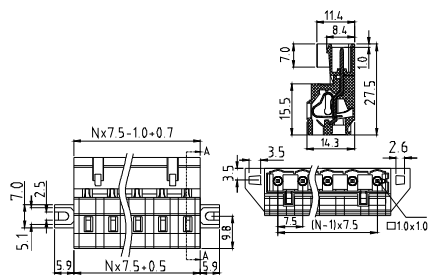


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

NB




Pitch 7.5mm
Snap-in mounting feet
Poles 2p~16p
NBxxA0840000G*
Number of poles

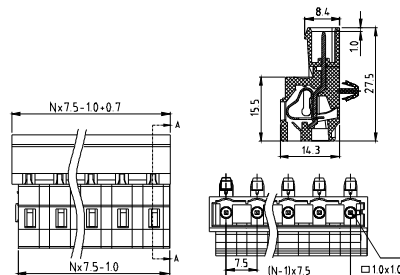


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

NB




Pitch 7.5mm
Snap-in mounting feet,
100% protected against mismatching
Poles 2p~16p
NBxxA0850000G*
Number of poles

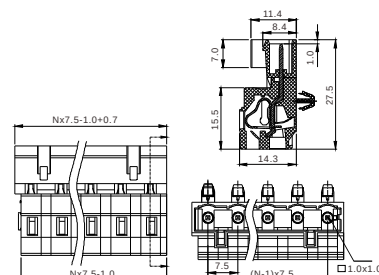


Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Wire range:	
Solid wire(AWG):	12-28
Stranded wire(AWG):	12-28
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Safety Approval:	(cULus) pending

G

NF




Pitch 5.08mm-W/O flange
Poles 2p~24p
NFxx5050000G*
Number of poles

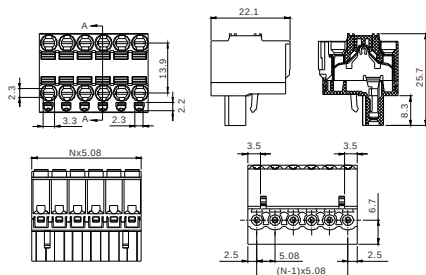


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NF




Pitch 5.08mm-With flange
Poles 2p~24p
NFxx5051000G*
Number of poles

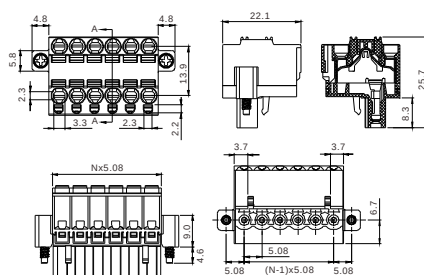


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NF




Pitch 5.08mm-With latch
Poles 2p~24p
NFxx5052000G*
Number of poles

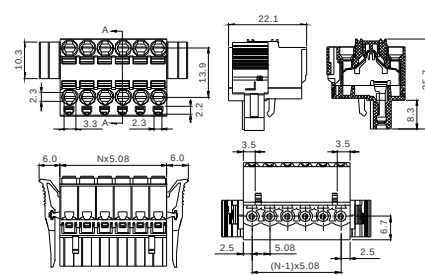


Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Wire range:	
Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	11-12mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

NT



Pitch 5.08mm-W/O flange
Poles 2p~24p
NTxx5080000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	5A
Wire range:	
Solid wire(AWG):	18-24
Stranded wire(AWG):	18-24
Wire strip length:	
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HO



Pitch 5.0mm
Poles 2p~12p
HOxx00x00000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	Sol.13A / Str.15A
Wire range:	
Solid wire(AWG):	14-18
Stranded wire(AWG):	14-18
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

HO




Pitch 7.5mm
Poles 2p~12p
HOxx20x00000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	Sol.13A / Str.15A
Wire range:	
Solid wire(AWG):	14-18
Stranded wire(AWG):	14-18
Wire strip length:	9-10mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

E5 - Screwless type




Pitch 6.35mm
Poles 2*8p~2*12p/2*14p/2*16p
E5xx0B500000G*
Number of poles

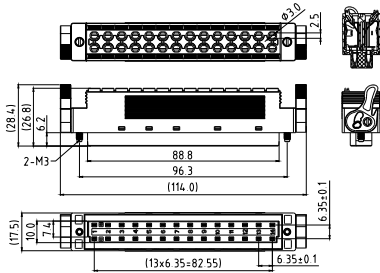


Electrical:	cULus
Voltage rating:	300V
Current rating:	6A
Wire range:	
Solid wire(AWG):	16-20
Stranded wire(AWG):	16-20
Wire strip length:	12mm
Withstanding Voltage:	2.2KV
Safety Approval:	(cULus) pending

N4




Pitch 3.5mm
With operating lever
Poles 2*18p
N43610030000G*
Number of poles

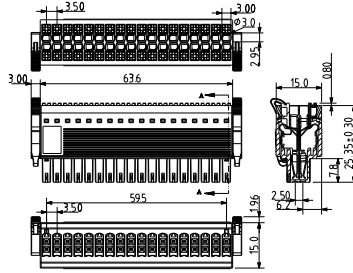


Electrical:	cULus
Voltage rating:	300V
Current rating:	10A
Wire range:	
Solid wire(AWG):	16-30
Stranded wire(AWG):	16-30
Wire strip length:	12-15mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus

PS



Pitch 3.5mm
Poles 2p~16p
PSxx10000000G*
Number of poles




Electrical:	cULus
Voltage rating:	300V
Current rating:	9A
Wire range:	
Solid wire(AWG):	16-22
Stranded wire(AWG):	16-20
Wire strip length:	10-11mm
Withstanding Voltage:	1.6KV
Safety Approval:	cULus



AN-2P



Width: 12.5mm
AN0200500000G*

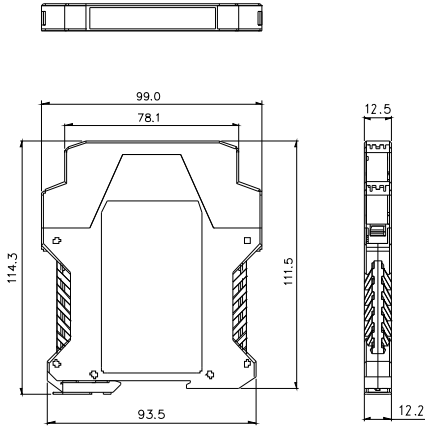

Match with:

Male Header: EU 2P (Right)

EU 2P (Left)


Female Terminal Block:

TJ(5.0)2p (Contact on up side)

AN-3P



Width: 17.5mm
AN0300500000G*

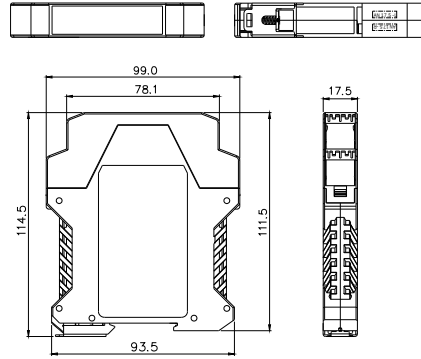

Match with:

Male Header: EU5.0 3P (Right)

EU5.0 3P (Left)


Female Terminal Block:

TJ(5.0)3p (Contact on up side)

AN-4P



Width: 22.7mm
AN0000500000G*

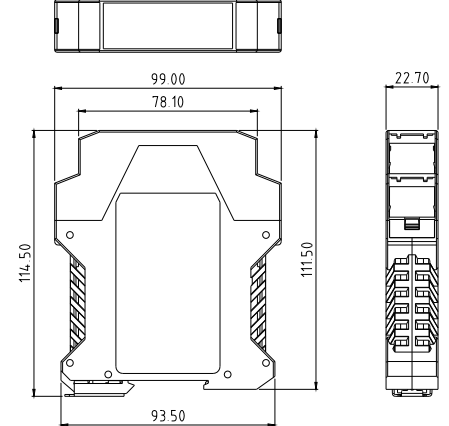

Match with:

Male Header: EU 4P (Right)

EU 4P (Left)


Female Terminal Block:

TJ(5.0)4p (Contact on up side)

AN-4P B type



Width: 22.7mm
AN0000200010G*

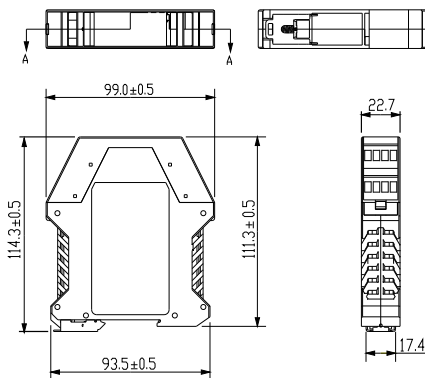

Match with:


Male Header: E6 4P(Right)

E6 4P (Left)

AM-3P



Width: 15.2mm
AM0000800000G*

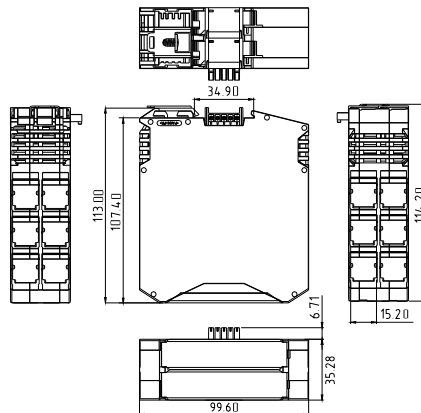

Match with:

Male Header: EU 3P (Right)

EU 3P (Left)


Female Terminal Block:

TJ(5.0)3p (Contact on up side)

AM-4P



Width: 20.2mm
AM0000810000G*

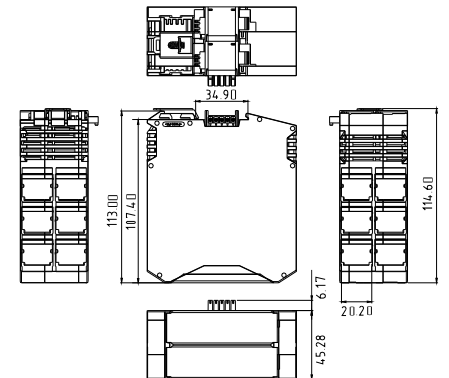

Match with:


Male Header: EU 4P (Right)

EU 4P (Left)


Female Terminal Block:

TJ(5.0)4p (Contact on up side)

ANAA



ANAA00600000G*
With AN

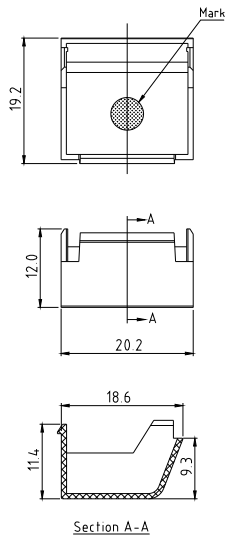


Used for AN series

AL




ALxxxx50000AG(72mm)

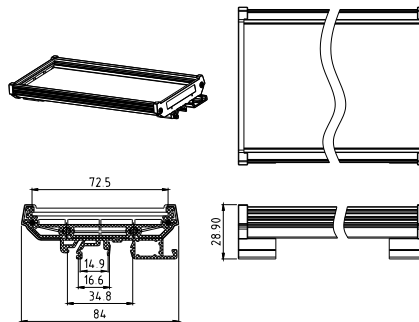

AL




ALxxxx56000AG(2-72mm)

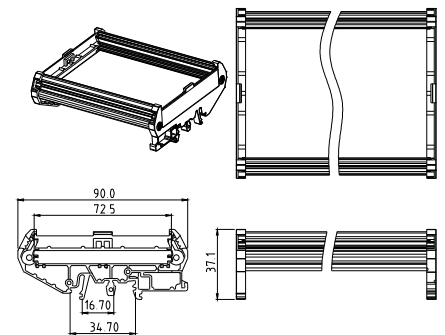


AL




ALxxxx51000AG (107mm)

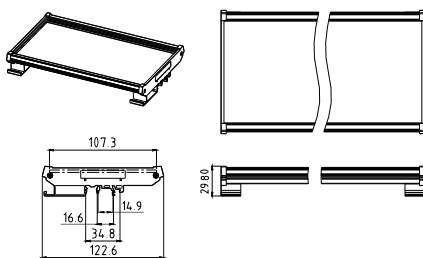


AL




ALxxxx54000AG (122mm)

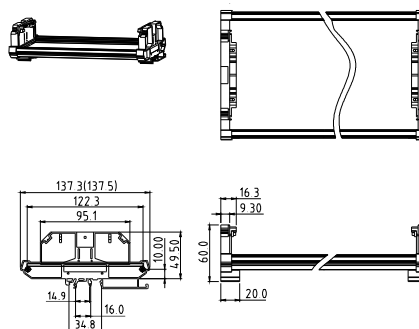

AI



AI0000500000G*
AI with V7 5.0/5.08/7.5/7.62




Pitch 5.0/5.08/7.5/7.62

	V7				
AI	●				

AE



Coding key(70°)
AE0000200000G*

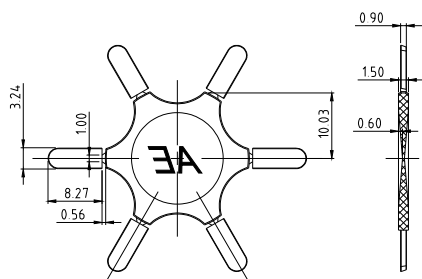

Pitch 5.0/5.08/7.5/7.62

	TJ	TS	VM	VD	VH	EM
AE	●	●	●	●	●	●


	EZ	V7	V9	KI	EY	HI
AE	●	●	●	●	●	●

	HN	HP	HW	H4	KD	
AE	●	●	●	●	●	

AF



Coding key
AF0000200000G*

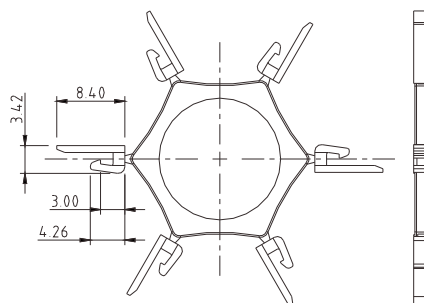

Pitch 5.0/5.08/7.5/7.62


	OQ	VK	VE	VL	VF	VZ
AF	●	●	●	●	●	●

	V5	V8	H5	EU	KE	
AF	●	●	●	●	●	

AG



Coding key
AG0000200000G*

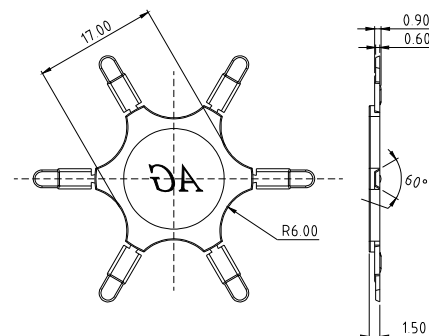

Pitch 3.5/3.81


	OQ	VK	VL	VO	VZ	V5
AG	●	●	●	●	●	●

	V8	H5	VF	KE	EU	VS
AG	●	●	●	●	●	●

AP



Coding key
AP0000200000G*

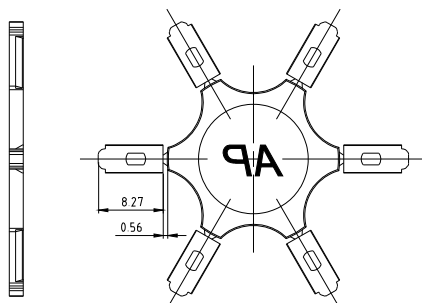


	VB	VC	ET	KK	KJ	KL
AP	●	●	●	●	●	●

	EV	EW	KT	KS		
AP	●	●	●	●		

AU



Coding key(60°)
AU0000200000G*

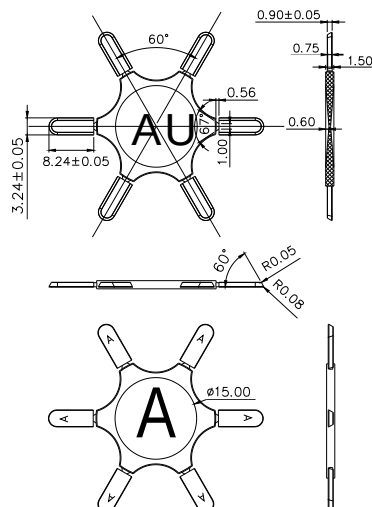

Pitch 5.0/5.08


(TJ 5.0&5.08 Contact on up side

HW 5.0/5.08 Contact on up side&HW 5.08 Contact in the middle)

AH



Coding key
AH0000500000G
AH with OQ 5.0/5.08

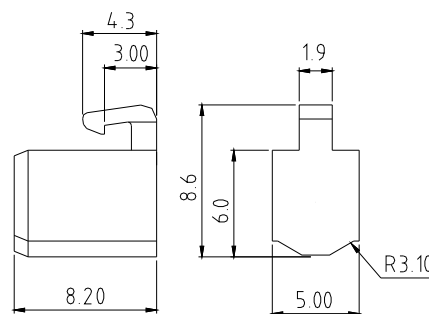


Pitch 5.0/5.08

	OQ	VK	VL	VF	V8	V5
AH	●	●	●	●	●	●


	VZ	H5	KE			
AH	●	●	●			

AD





AD Cover 16P used for TJ-5.08-16P.
AD Cover 18P used for TJ-5.08-18P.


AC




AS

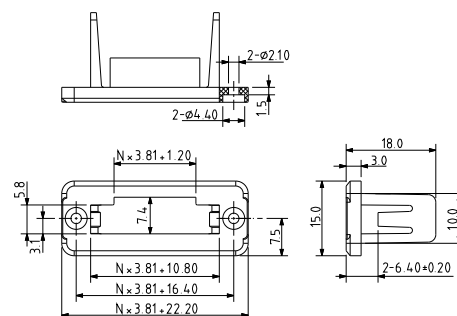



AS




AQ



AT




AB



Handle for HO-5.0/7.5

AB0000900000G*




AJ



Handle for HG series

AJ0000900000G



Pitch 5.0/5.08/7.5/7.62/10.0


	HG					
AJ	●					

AK



Handle for HI / NB series

AK0000900000G



Pitch 5.0/7.5/7.62


	HI	NB				
AK	●	●				

AW






Handle for NQ-3.0

AW0000F00000G*

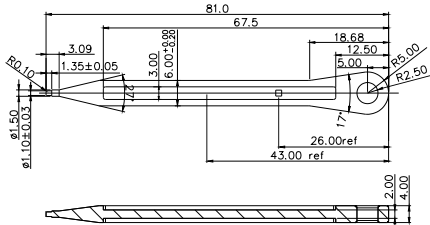

Barrier Terminal Block

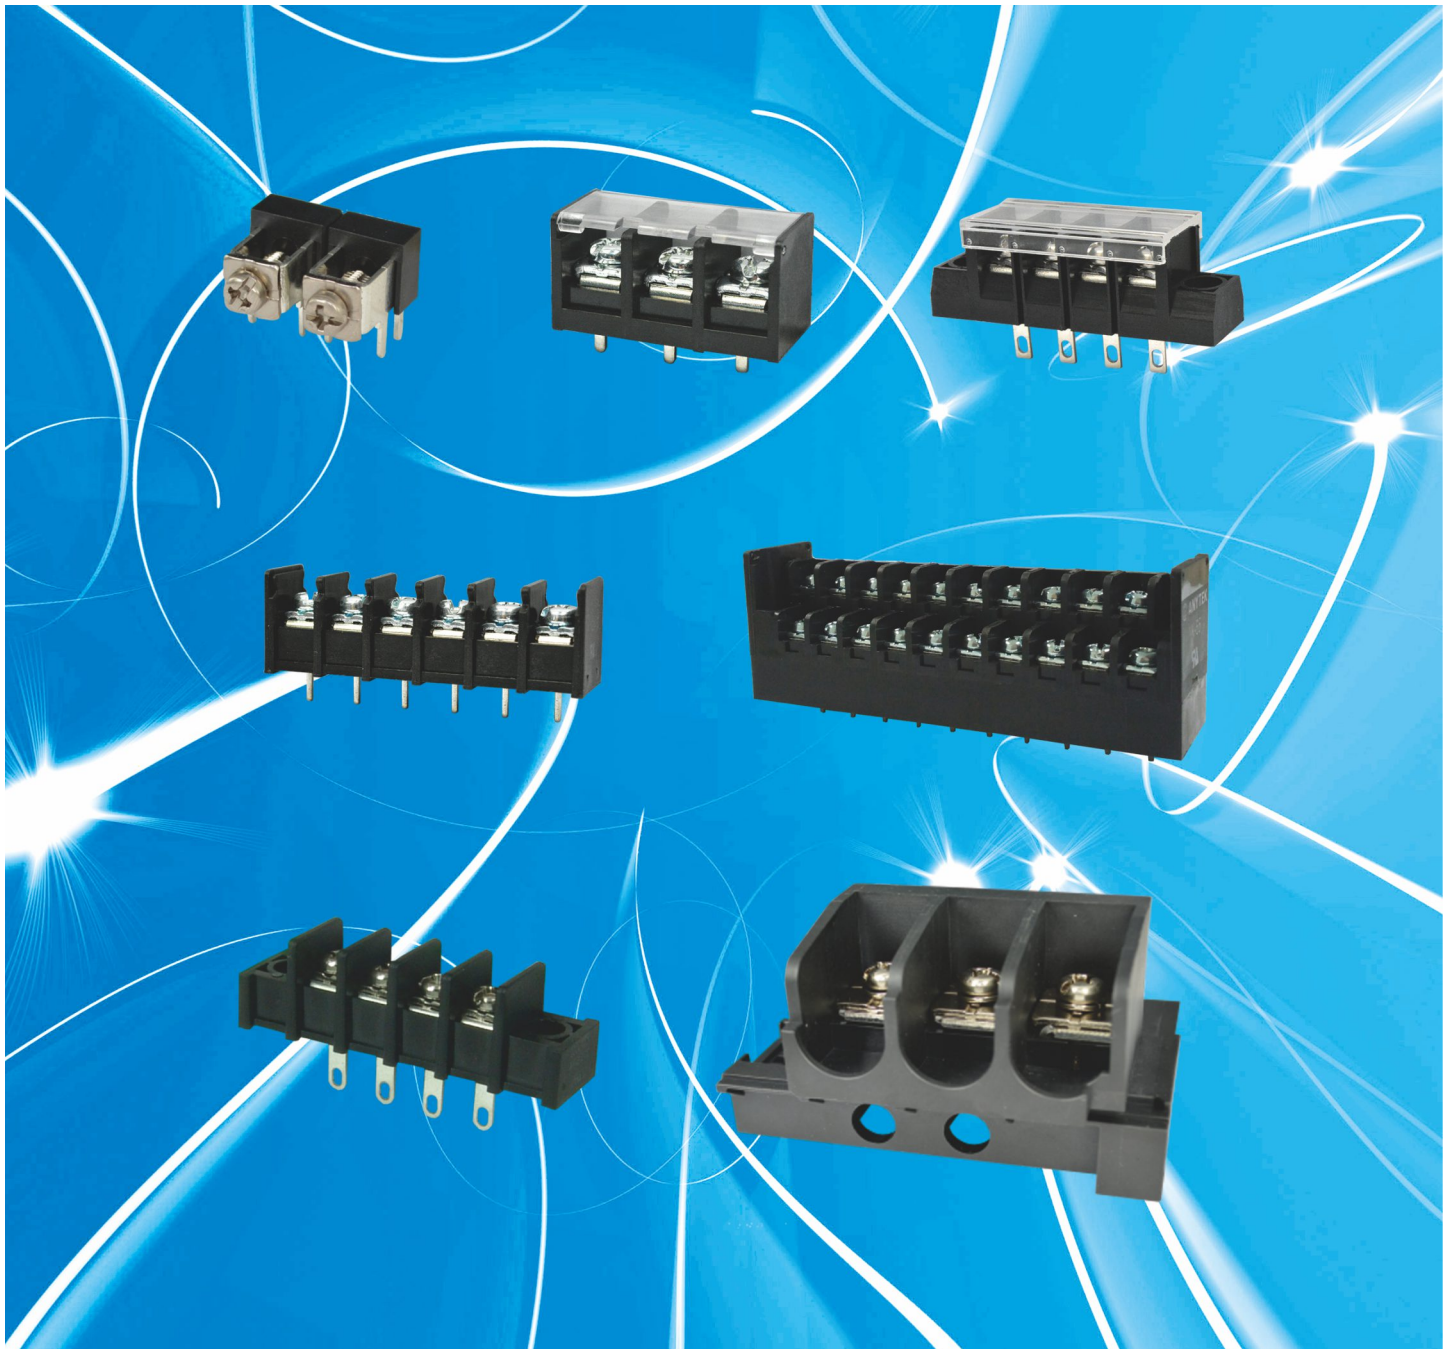


Pitch: 6.35, 7.0, 7.62, 8.25, 9.5, 9.52, 10.0, 11.0, 11.4, 12.7, 16.0, 21.0

Rated Voltage Range(cULus) :150V-600V

Rated Current Range(cULus): 10A-140A

YK-211

PITCH-6.35mm

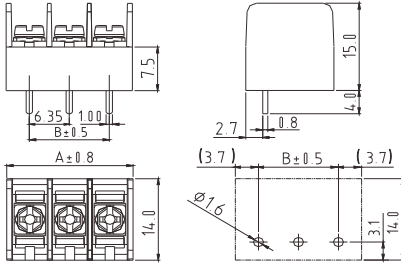

Materials Electrical


Rated:	300V 10A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	6.5 Lb-In
Suitable Electric Wire:	22~16AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*6.35+7.35
Dim B	(N-1)*6.35

YK-221

PITCH-6.35mm

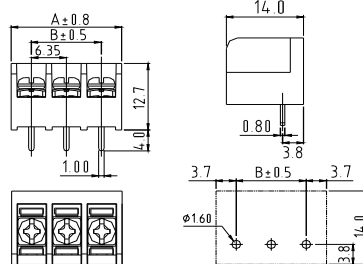

Materials Electrical


Rated:	250V 10A / 250V 9A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.3Lb-In / 0.5Nm
Suitable Electric Wire:	22~18AWG/22~18AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*6.35+7.35
Dim B	(N-1)*6.35

YK-222

PITCH-6.35mm

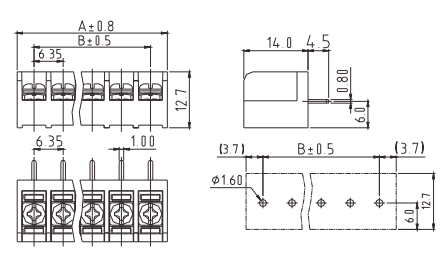

Materials Electrical



Rated:	250V 10A / 250V 9A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.3Lb-In / 0.5Nm
Suitable Electric Wire:	22~18AWG/22~18AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*6.35+7.35
Dim B	(N-1)*6.35

YK-223

PITCH-6.35mm



Materials Electrical



Rated:	250V 10A / 250V 9A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.3Lb-In / 0.5Nm
Suitable Electric Wire:	22~18AWG/22~18AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*6.35+7.35
Dim B	(N-1)*6.35

YK-224

PITCH-6.35mm



Materials Electrical



Rated:	250V 10A / 250V 9A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.3Lb-In / 0.5Nm
Suitable Electric Wire:	22~18AWG/22~18AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*6.35+7.35
Dim B	(N-1)*6.35

YK-991

PITCH-7.0mm

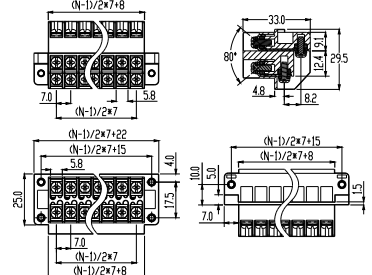



Materials Electrical

Rated:	300V 20A
Withstand Voltage:	AC2500V
Insulation Resistance:	1000MΩ
Operating Temperature:	-40°C~+125°C
Screw Torque Value:	7 Lb-In max for bare wire 10 Lb-In max for fork terminal 4.5 Lb-In max for flange nut
Stranded wire:	16-22AWG
Body:	PC Thermoplastic UL94V-0 Grey(RAL7032)
Approval:	pending

N=Number of poles (2*2p~2*20p)

YK-301

PITCH-7.62mm

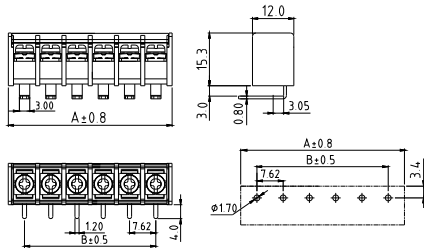

Materials Electrical



Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-301

PITCH-7.62mm
W/O cover

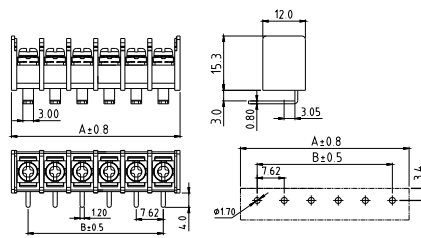

Materials Electrical



Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-302

PITCH-7.62mm

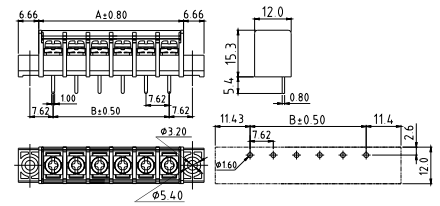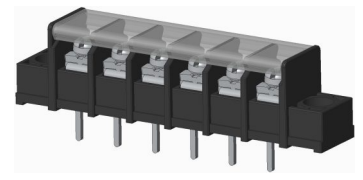

Materials Electrical



Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~18p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-302

PITCH-7.62mm
W/O cover

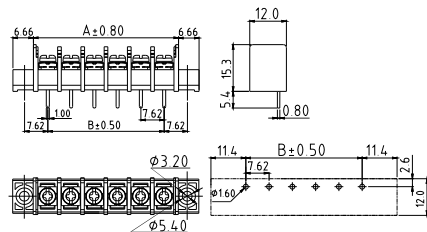

Materials Electrical


Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~18p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-303

PITCH-7.62mm

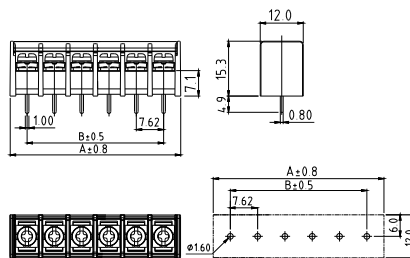

Materials Electrical



Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-303

PITCH-7.62mm
W/O cover

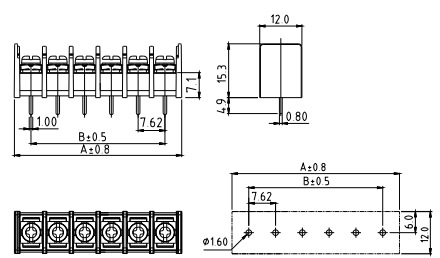



Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-304 PITCH-7.62mm

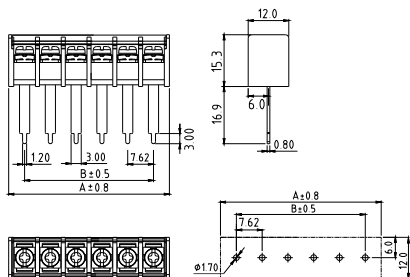


Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-304 PITCH-7.62mm W/O cover

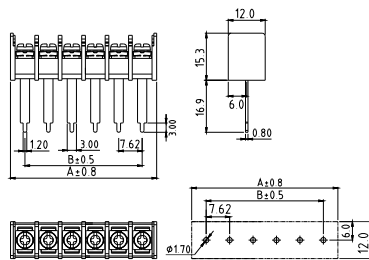

Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)


Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

Barrier Terminal Block

YK-304 PITCH-7.62mm High profile-2P





YK3040203001G/YK3040203101G



Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel, Ninc Plated M3.0
Approval:	pending

YK-305 PITCH-7.62mm

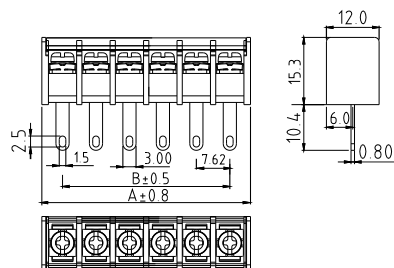



Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-305 PITCH-7.62mm W/O cover

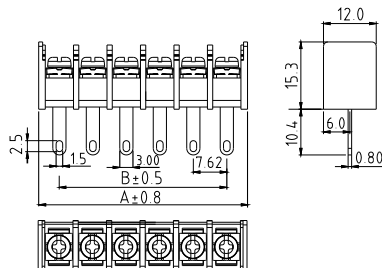



Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~20p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-306 PITCH-7.62mm

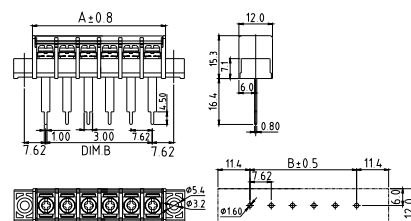


Materials Electrical

Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.0 Ni Plated
Approval:	

N=Number of poles (2p~18p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62


YK-306

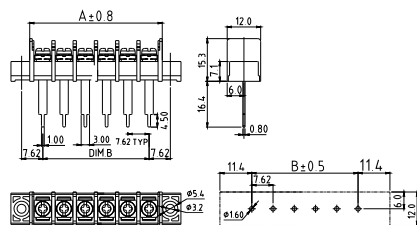

N=Number of poles (2p~18p)

Dim A	$(N-1)*7.62+9.54$
Dim B	$(N-1)*7.62$


YK-311

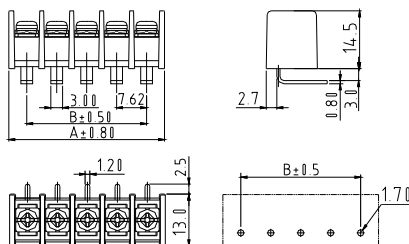

N=Number of poles (2p~30p)

Dim A	$(N-1)*7.62+9.12$
Dim B	$(N-1)*7.62$


YK-312

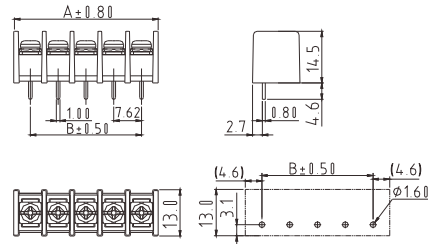

N=Number of poles (2p~30p)

Dim A	$(N-1)*7.62+9.12$
Dim B	$(N-1)*7.62$


YK-313

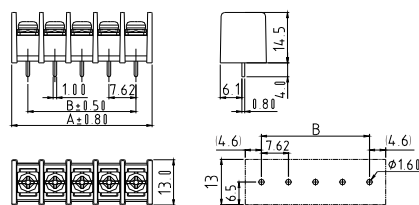

N=Number of poles (2p~30p)

Dim A	$(N-1)*7.62+9.12$
Dim B	$(N-1)*7.62$


YK-314

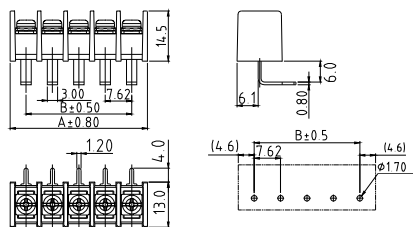

N=Number of poles (2p~30p)

Dim A	$(N-1)*7.62+9.12$
Dim B	$(N-1)*7.62$

YK-315

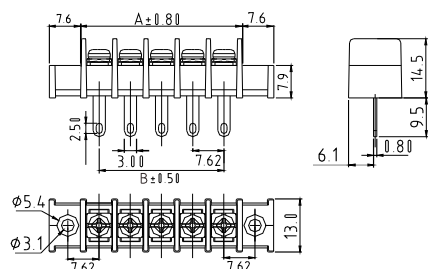


N=Number of poles (2p~30p)

Dim A	$(N-1)*7.62+9.54$
Dim B	$(N-1)*7.62$

YK-316

PITCH-7.62mm

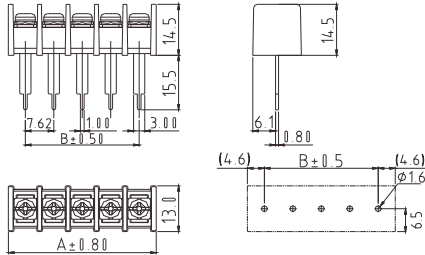

Materials Electrical


Rated:	250V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.3 Lb-In
Suitable Electric Wire:	22~16AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*7.62+9.54
Dim B	(N-1)*7.62

YK-321

PITCH-7.62mm

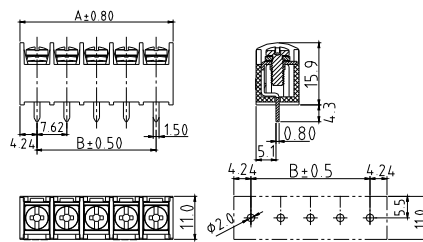

Materials Electrical


Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	5.2 Lb-In
Suitable Electric Wire:	22~14AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel #5-40UNC Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*7.62+8.48
Dim B	(N-1)*7.62

YK-661

PITCH-7.62mm

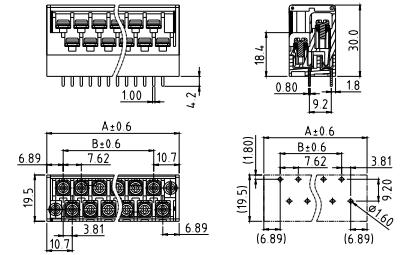

Materials Electrical



Rated:	300V 15A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	7.0 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Grey
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2*2p~2*21p)

Dim A	(N/2-1)*7.62+17.59
Dim B	(N/2-1)*7.62

YK-331

PITCH-8.25mm

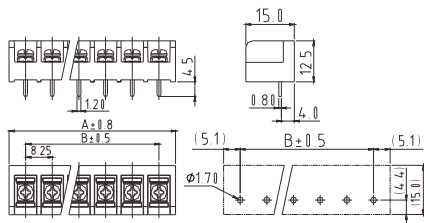

Materials Electrical


Rated:	300V 20A / 300V 32A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8Lb-In / 0.5Nm
Suitable Electric Wire:	22~12AWG/22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK-332

PITCH-8.25mm

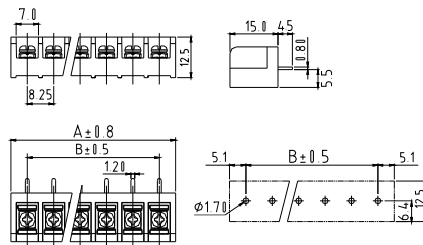

Materials Electrical



Rated:	300V 20A / 300V 32A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8Lb-In / 0.5Nm
Suitable Electric Wire:	22~12AWG/22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK-333

PITCH-8.25mm

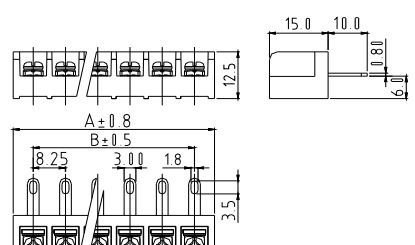

Materials Electrical


Rated:	300V 20A / 300V 32A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8Lb-In / 0.5Nm
Suitable Electric Wire:	22~12AWG/22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK-334

PITCH-8.25mm

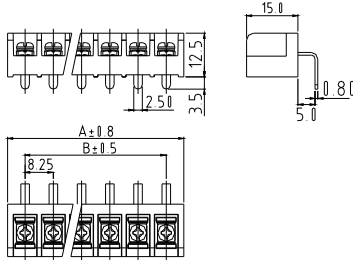

Materials Electrical


Rated: 300V 20A / 300V 32A
Insulation Withstands Voltage: AC2500V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 8.8Lb-In / 0.5Nm
Suitable Electric Wire: 22~12AWG/22~12AWG
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M3 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK-335

PITCH-8.25mm

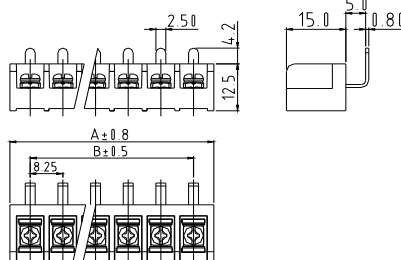

Materials Electrical



Rated: 300V 20A / 300V 32A
Insulation Withstands Voltage: AC2500V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 8.8Lb-In / 0.5Nm
Suitable Electric Wire: 22~12AWG/22~12AWG
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M3 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK -401

PITCH-8.25mm

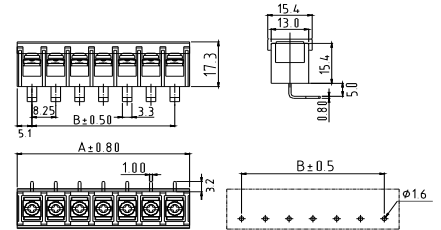

Materials Electrical



Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 7 Lb-In
Suitable Electric Wire: 22~12AWG
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M3 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK -401

PITCH-8.25mm
W/O cover

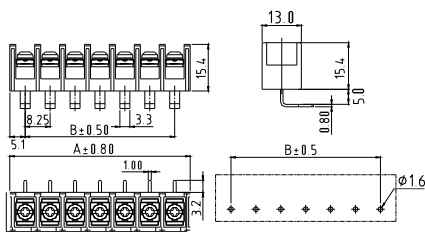

Materials Electrical



Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 7 Lb-In
Suitable Electric Wire: 22~12AWG
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M3 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK -402

PITCH-8.25mm

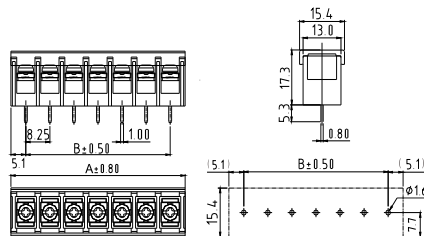

Materials Electrical



Rated: 300V 20A / 300V 32A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C / 40°C~+105°C
Screw Torque Value: 7 Lb-In / 0.8Nm
Suitable Electric Wire: 22~12AWG / 0.34~4.0mm²
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M3 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK -402

PITCH-8.25mm
W/O cover

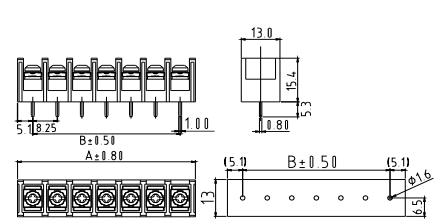



Materials Electrical

Rated: 300V 20A / 300V 32A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C / 40°C~+105°C
Screw Torque Value: 7 Lb-In / 0.8Nm
Suitable Electric Wire: 22~12AWG / 0.34~4.0mm²
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M3 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK -403 PITCH-8.25mm





Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	7 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

YK -403 PITCH-8.25mm W/O cover

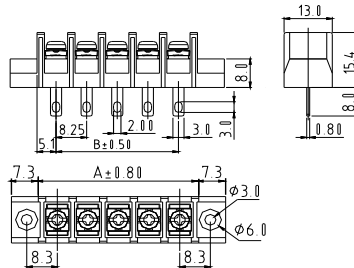

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	7 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.25
Dim B	(N-1)*8.25

Barrier Terminal Block

YK-411 PITCH-8.25mm

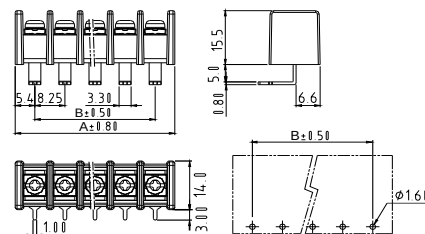



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.75
Dim B	(N-1)*8.25

YK-412 PITCH-8.25mm

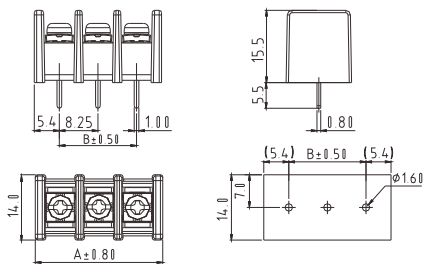



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.75
Dim B	(N-1)*8.25

YK-413 PITCH-8.25mm

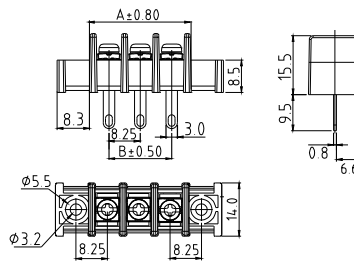



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.75
Dim B	(N-1)*8.25

YK-414 PITCH-8.25mm

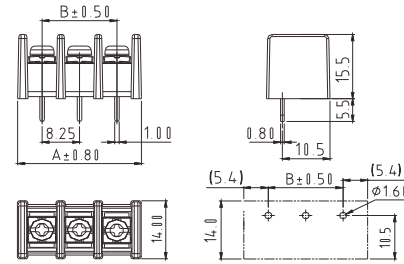

Materials Electrical


Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.75
Dim B	(N-1)*8.25

YK-415

PITCH-8.25mm

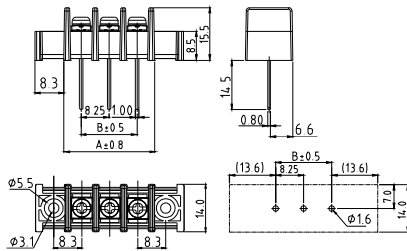

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+10.75
Dim B	(N-1)*8.25

YK-421

PITCH-8.25mm

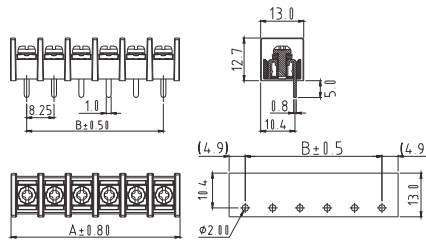

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*8.25+9.25
Dim B	(N-1)*8.25

YK-441

PITCH-9.50mm

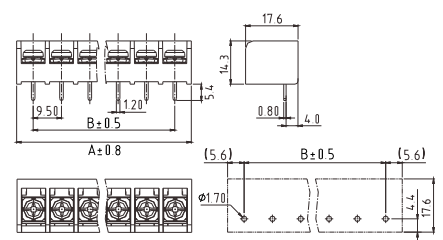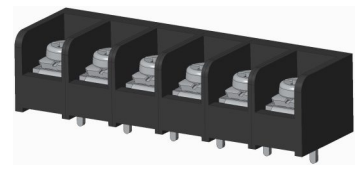

Materials Electrical



Rated:	300V 30A/300V 24A/300V 24A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C /40°C~+105°C
Screw Torque Value:	10.54 Lb-In/0.8Nm/1.2Nm
Suitable Electric Wire:	22~10AWG/22~14AWG/0.34~2.5mm ²
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11
Dim B	(N-1)*9.5

YK-442

PITCH-9.50mm

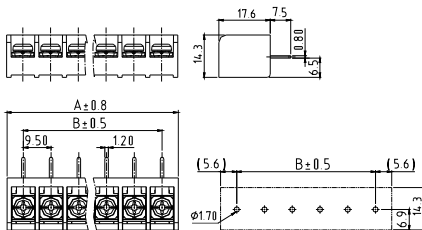

Materials Electrical



Rated:	300V 30A/300V 24A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	10.54 Lb-In/0.8Nm
Suitable Electric Wire:	22~10AWG/22~14AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11
Dim B	(N-1)*9.5

YK-443

PITCH-9.50mm

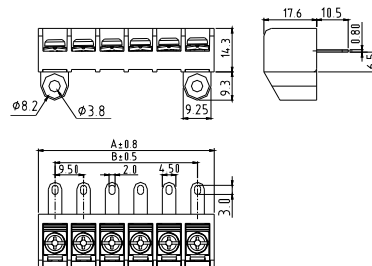

Materials Electrical


Rated:	300V 30A/300V 24A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	10.54 Lb-In/0.8Nm
Suitable Electric Wire:	22~10AWG/22~14AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11
Dim B	(N-1)*9.5

YK-444

PITCH-9.50mm

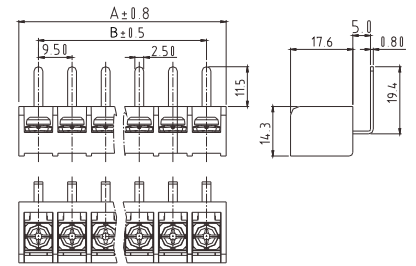

Materials Electrical



Rated:	300V 30A/300V 24A
Insulation Withstands Voltage:	AC2500V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	10.54 Lb-In/0.8Nm
Suitable Electric Wire:	22~10AWG/22~14AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11
Dim B	(N-1)*9.5

YK-501

PITCH-9.50mm
W/O cover

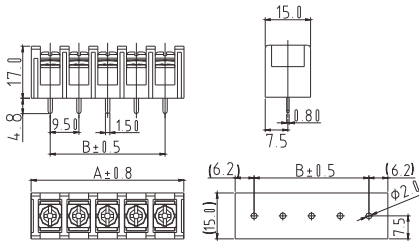

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-503

PITCH-9.50mm

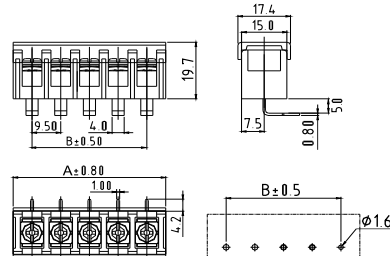

Materials Electrical


Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-503

PITCH-9.50mm
W/O cover

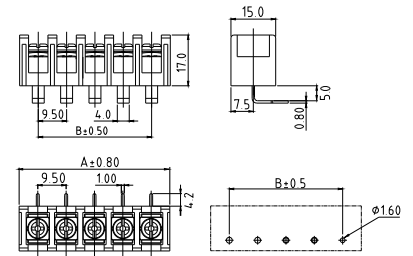

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-504

PITCH-9.50mm

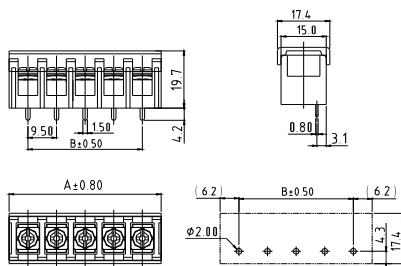

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-504

PITCH-9.50mm
W/O cover

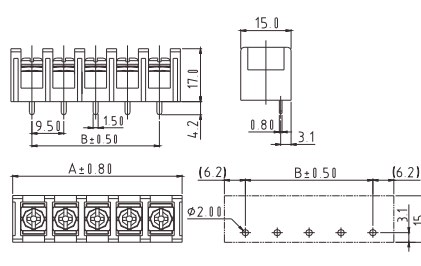

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-505

PITCH-9.50mm

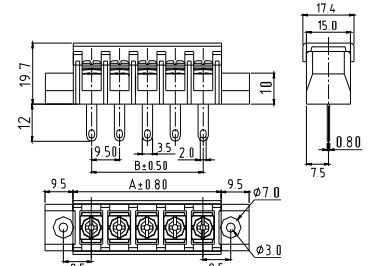

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-505

PITCH-9.50mm
W/O cover

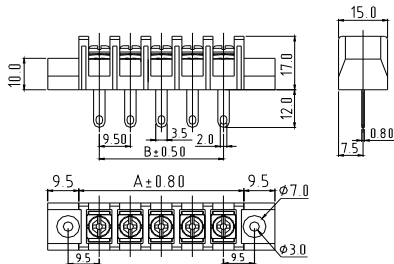

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-506

PITCH-9.50mm



Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-506

PITCH-9.50mm
W/O cover

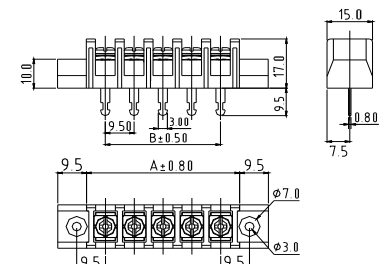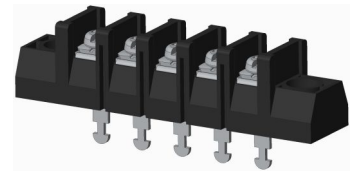

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+12.5
Dim B	(N-1)*9.5

YK-50A

PITCH-9.50mm

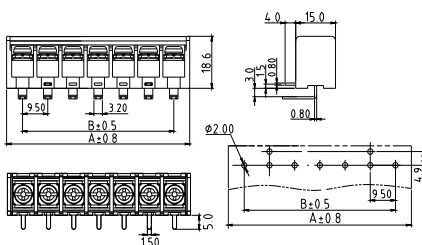

Materials Electrical



Rated:	300V 30A/300V 32A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C /40°C~+105°C
Screw Torque Value:	7 Lb-In/7 Lb-In
Suitable Electric Wire:	22~10AWG/0.34-4.0mm ²
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~18p)

Dim A	(N-1)*9.5+12
Dim B	(N-1)*9.5

YK-50A

PITCH-9.50mm
W/O cover

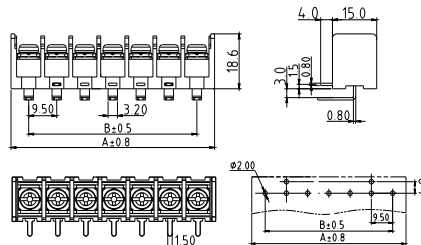

Materials Electrical


Rated:	300V 30A/300V 32A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C /40°C~+105°C
Screw Torque Value:	7 Lb-In/7 Lb-In
Suitable Electric Wire:	22~10AWG/0.34-4.0mm ²
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~18p)

Dim A	(N-1)*9.5+12
Dim B	(N-1)*9.5

YK-510

PITCH-9.50mm

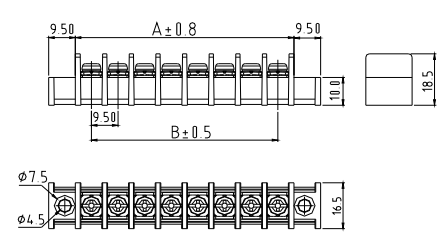



Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~10AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	()pending

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-511 PITCH-9.50mm

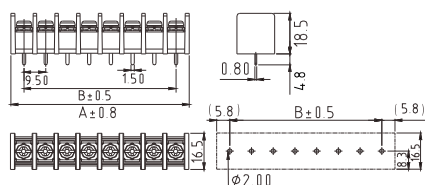



Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~10AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-512 PITCH-9.50mm

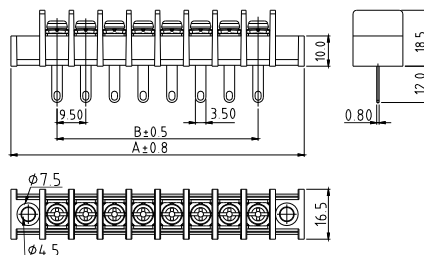



Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~10AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-513 PITCH-9.50mm

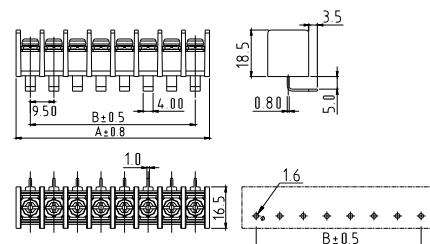



Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~10AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-514 PITCH-9.50mm

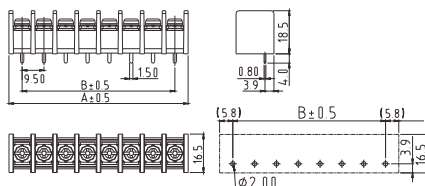


Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~10AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-515 PITCH-9.50mm

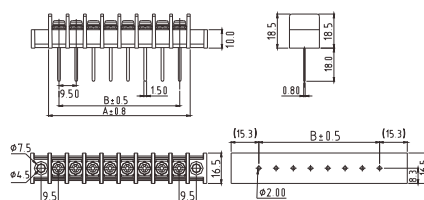



Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~10AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-516 PITCH-9.50mm

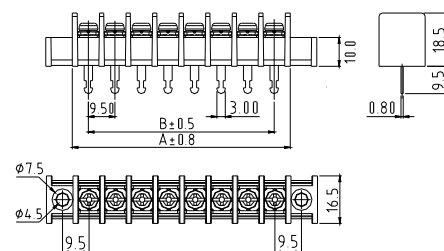


Materials Electrical

Rated:	300V 25A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.8 Lb-In
Suitable Electric Wire:	22~14AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*9.5+11.5
Dim B	(N-1)*9.5

YK-771 PITCH-9.52mm

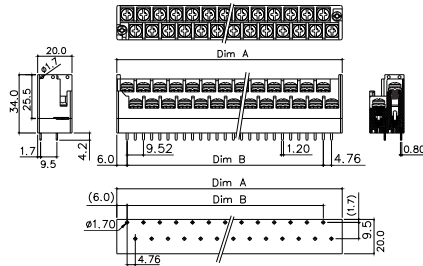


Materials Electrical

Rated:	300V 10A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	20~14AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2*2p~2*15p)

Dim A	(N/2-1)*9.525+16.8
Dim B	(N/2-1)*9.525

YK-601 PITCH-10.0mm

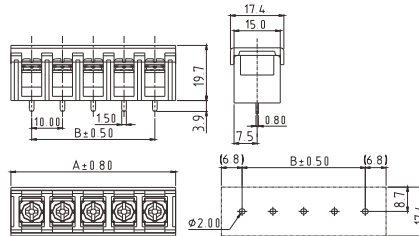

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

Barrier Terminal Block

YK-601 PITCH-10.0mm W/O cover

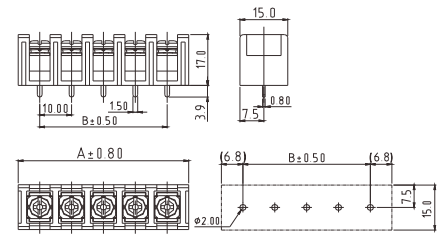



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-602 PITCH-10.0mm

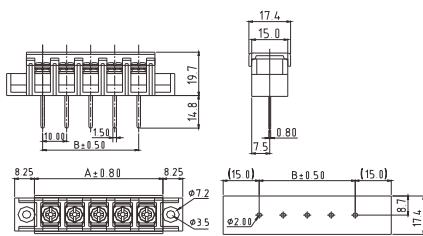


Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-602 PITCH-10.0mm W/O cover

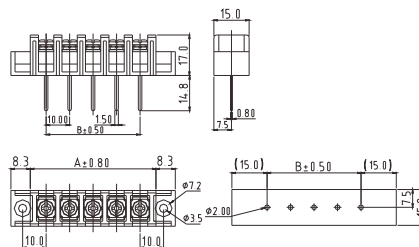



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-603 PITCH-10.0mm

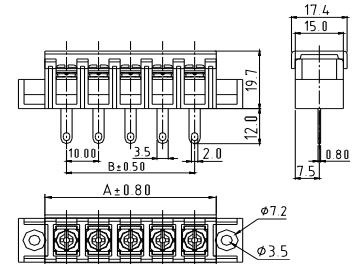

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	12 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M3.5 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-603

PITCH-10.0mm
W/O cover

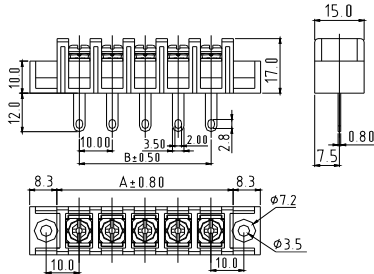

Materials Electrical



Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 12 Lb-In
Suitable Electric Wire: 22~12AWG
1)Molded Parts: Thermoplastic UL94V-0 Black
2)Terminal: Brass 0.8t Tin Plated
3)Terminal Screw: Steel M3.5 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-604

PITCH-10.0mm

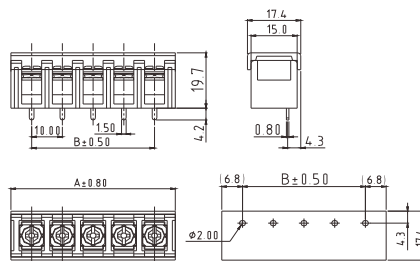

Materials Electrical



Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 12 Lb-In
Suitable Electric Wire: 22~12AWG
1)Molded Parts: Thermoplastic UL94V-0 Black
2)Terminal: Brass 0.8t Tin Plated
3)Terminal Screw: Steel M3.5 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-604

PITCH-10.0mm
W/O cover

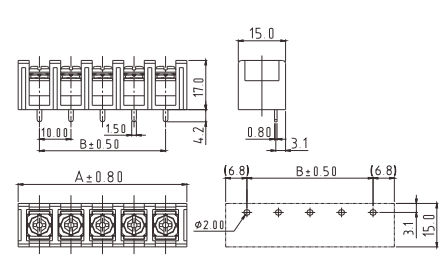

Materials Electrical


Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 12 Lb-In
Suitable Electric Wire: 22~12AWG
1)Molded Parts: Thermoplastic UL94V-0 Black
2)Terminal: Brass 0.8t Tin Plated
3)Terminal Screw: Steel M3.5 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-605

PITCH-10.0mm

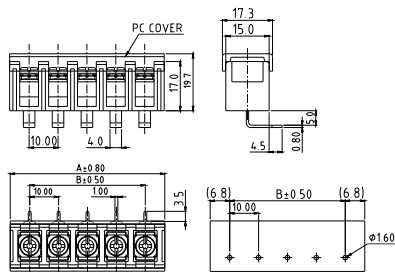

Materials Electrical


Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 12 Lb-In
Suitable Electric Wire: 22~12AWG
1)Molded Parts: Thermoplastic UL94V-0 Black
2)Terminal: Brass 0.8t Tin Plated
3)Terminal Screw: Steel M3.5 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-605

PITCH-10.0mm
W/O cover

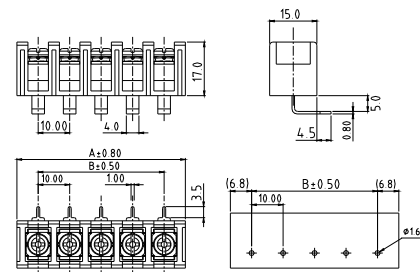

Materials Electrical


Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 12 Lb-In
Suitable Electric Wire: 22~12AWG
1)Molded Parts: Thermoplastic UL94V-0 Black
2)Terminal: Brass 0.8t Tin Plated
3)Terminal Screw: Steel M3.5 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-606

PITCH-10.0mm

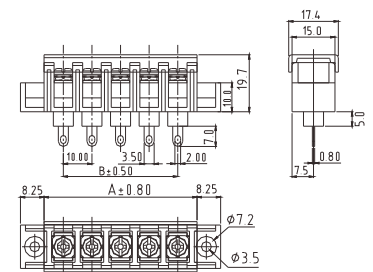


Materials Electrical

Rated: 300V 20A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 12 Lb-In
Suitable Electric Wire: 22~12AWG
1)Molded Parts: Thermoplastic UL94V-0 Black
2)Terminal: Brass 0.8t Tin Plated
3)Terminal Screw: Steel M3.5 Ni Plated
Approval:


N=Number of poles (2p~30p)

Dim A	(N-1)*10+13.5
Dim B	(N-1)*10

YK-50B PITCH-10.0mm



YK50Bxx2xx00G*

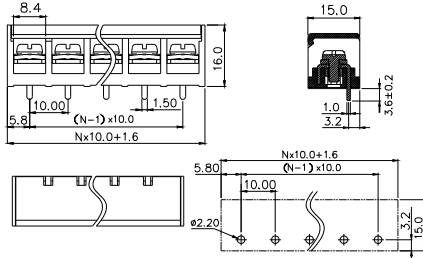


Materials Electrical

Rated: 300V 35A/400V 57A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+130°C
Screw Torque Value: 12.0~16.0 Lb-In/1.4~1.8N.m
Suitable Electric Wire: 8~22AWG/0.34~10mm²
1) Molded Parts: PBT, UL94V-0 Black
2) Terminal: Copper, 1.0t, Tin plated
3) Terminal Screw: Steel Zinc plated M3 5
4) Terminal Nut: Steel Zinc plated M3 5
5) Cover Material: PC, Transparent UL94-HB
Approval:

N=Number of poles (2p~12p)

Dim B	(N-1)*10.0
Dim A	N*10.0+1.60

YK-701 PITCH-11.0mm

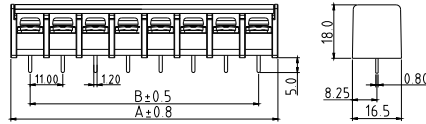

Materials Electrical




Rated: 300V 30A/500V 32A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 15Kgf.cm/1.2-1.8N.m
Suitable Electric Wire: 22~10AWG/0.34-4mm²
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M4.0 Ni Plated
Approval:

N=Number of poles (2p~18p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

Barrier Terminal Block

YK-701 PITCH-11.0mm W/O cover

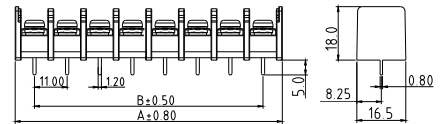



Materials Electrical

Rated: 300V 30A/500V 32A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 15Kgf.cm/1.2-1.8N.m
Suitable Electric Wire: 22~10AWG/0.34-4mm²
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M4.0 Ni Plated
Approval:

N=Number of poles (2p~18p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

YK-70A PITCH-11.0mm

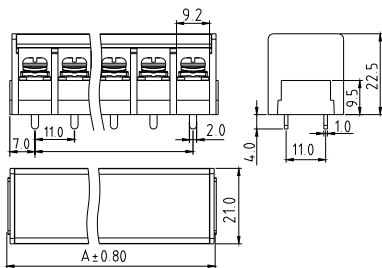



Electrical:
Rated: 300V 40A 750V/41A
Withstands Voltage: AC2500V/min AC3000V/min
Insulation Resistance: 1000MΩ or more at DC1000V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 16 Lb-In 1.8N.m
Suitable Electric Wire: 18~8AWG 0.75-6mm²
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 1.0t Tin Plated
3) Terminal Screw: Steel M4.0 Ni Plated
Approval:

N=Number of poles (2p~16p)

Dim A	(N-1)*11+14
Dim B	(N-1)*11

YK-70A PITCH-11.0mm W/O cover

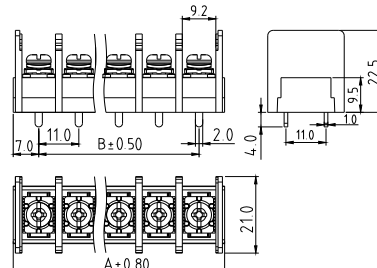



Electrical:
Rated: 300V 40A 750V/41A
Withstands Voltage: AC2500V/min AC3000V/min
Insulation Resistance: 1000MΩ or more at DC1000V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 16 Lb-In 1.8N.m
Suitable Electric Wire: 18~8AWG 0.75-6mm²
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 1.0t Tin Plated
3) Terminal Screw: Steel M4.0 Ni Plated
Approval:

N=Number of poles (2p~16p)

Dim A	(N-1)*11+14
Dim B	(N-1)*11

YK-551 PITCH-11.0mm

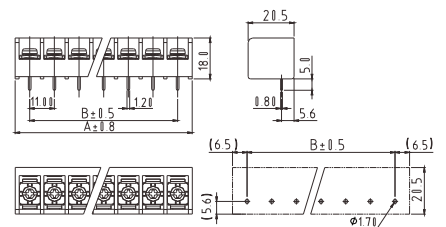

Materials Electrical



Rated: 300V 30A
Insulation Withstands Voltage: AC2000V/min
Insulation Resistance: 1000MΩ or more at DC500V
Using Temperature Range: -40°C~+115°C
Screw Torque Value: 9.5 Lb-In
Suitable Electric Wire: 22~10AWG
1) Molded Parts: Thermoplastic UL94V-0 Black
2) Terminal: Brass 0.8t Tin Plated
3) Terminal Screw: Steel M4 Ni Plated
Approval:

N=Number of poles (2p~30p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

YK-552

PITCH-11.0mm

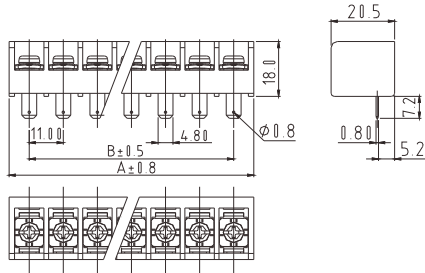

Materials Electrical



Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	9.5 Lb-In
Suitable Electric Wire:	22~10AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

YK-553

PITCH-11.0mm

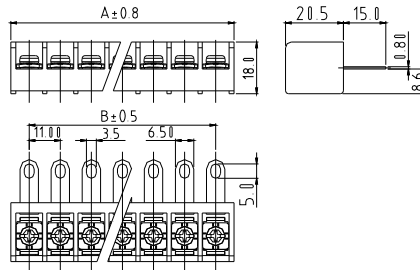

Materials Electrical



Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	9.5 Lb-In
Suitable Electric Wire:	22~10AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

YK-554

PITCH-11.0mm

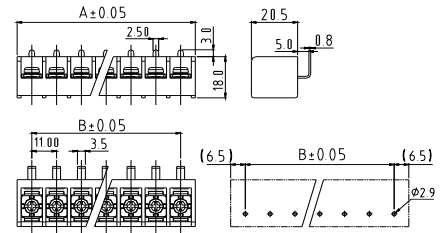

Materials Electrical



Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	9.5 Lb-In
Suitable Electric Wire:	22~10AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

YK-555

PITCH-11.0mm

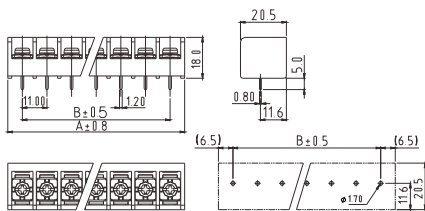

Materials Electrical



Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	9.5 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 0.8t Tin Plated
3) Terminal Screw:	Steel M4.0 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N-1)*11+13
Dim B	(N-1)*11

YK-111

PITCH-11.0mm



Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	11 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 1.2t Tin Plated
3) Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N+1)*11.0+8.0
Dim B	N*11.0+0.2
Dim C	(N+1)*11.0+1.0
Dim D	(N-1)*11.0

YK-112

PITCH-11.0mm

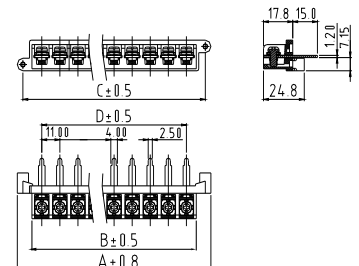



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	11 Lb-In
Suitable Electric Wire:	22~12AWG
1) Molded Parts:	Thermoplastic UL94V-0 Black
2) Terminal:	Brass 1.2t Tin Plated
3) Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N+1)*11.0+8.0
Dim B	N*11.0+0.2
Dim C	(N+1)*11.0+1.0
Dim D	(N-1)*11.0

YK-113 PITCH-11.0mm

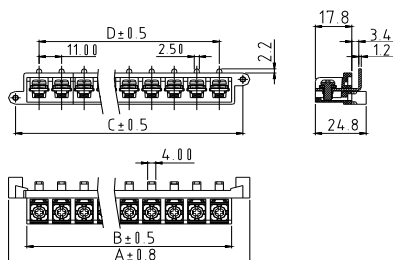



Materials Electrical

Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	11 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.2t Tin Plated
3)Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N+1)*11.0+8.0
Dim B	N*11.0+0.2
Dim C	(N+1)*11.0+1.0
Dim D	(N-1)*11.0

YK-114 PITCH-11.0mm

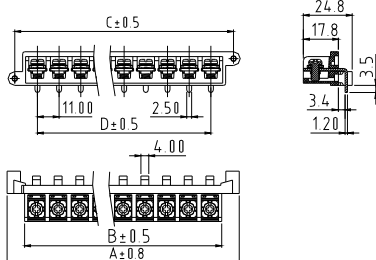

Materials Electrical



Rated:	300V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	11 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.2t Tin Plated
3)Terminal Screw:	Steel M4 Ni Plated
Approval:	

N=Number of poles (2p~30p)

Dim A	(N+1)*11.0+8.0
Dim B	N*11.0+0.2
Dim C	(N+1)*11.0+1.0
Dim D	(N-1)*11.0

Barrier Terminal Block



YK-11E 4P PITCH-11.0mm

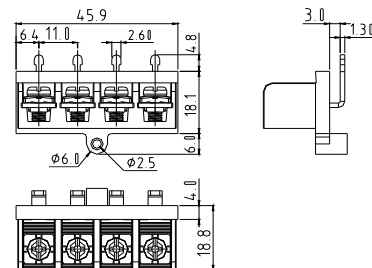

Materials Electrical

Rated:	150V 20A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	8.7 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.3t Tin Plated
3)Terminal Screw:	Steel M4 Ni Plated
Approval:	

YK-881 PITCH-12.7mm

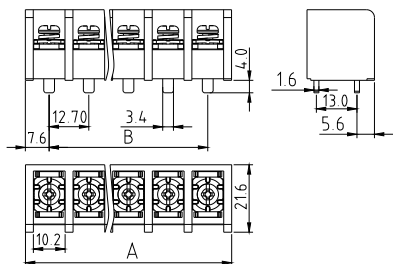


Materials Electrical

Rated:	600V 45A / 600V 57A
Insulation Withstands Voltage:	AC2500V/min / AC3000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+125°C / 40°C~+120°C
Screw Torque Value:	16Lb-In / 1.8Nm
Suitable Electric Wire:	18~8AWG/18~8AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.6t Tin Plated
3)Terminal Screw:	Steel M4.0 Ni Plated
Approval:	 


N=Number of poles (2p~20p)

Dim A	(N-1)*12.7+15.24
Dim B	(N-1)*12.7

YK-901 PITCH-16.0mm



Tail length: 4.0mm

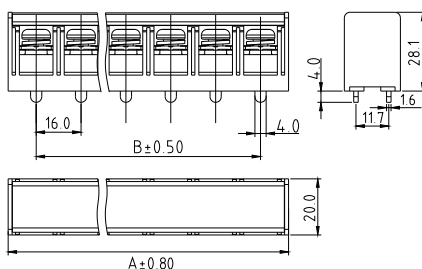


Rated:

Rated:	600V 65A/1000V 67A
Insulation Withstands Voltage:	AC3000V/min
Rated Impulse Withstand Voltage(Uimp):	AC4000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C / 40°C~+105°C
Screw Torque Value:	26 Lb-In
Suitable Electric Wire:	10~3AWG/10~6AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.6t Tin Plated
3)Terminal Screw:	Steel M6.0 Ni Plated
Approval:	 


N=Number of poles (2p~10p)

Dim A	(N-1)*16+20
Dim B	(N-1)*16

YK-901 PITCH-16.0mm W/O cover



Tail length: 4.0mm

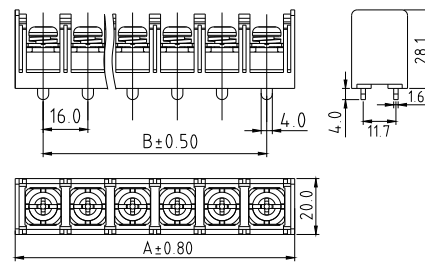


Rated:

Rated:	600V 65A/1000V 67A
Insulation Withstands Voltage:	AC3000V/min
Rated Impulse Withstand Voltage(Uimp):	AC4000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C / 40°C~+105°C
Screw Torque Value:	26 Lb-In
Suitable Electric Wire:	10~3AWG/10~6AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.6t Tin Plated
3)Terminal Screw:	Steel M6.0 Ni Plated
Approval:	 


N=Number of poles (2p~10p)

Dim A	(N-1)*16+20
Dim B	(N-1)*16

YK-902 PITCH-16.0mm



Tail length: 6.0mm

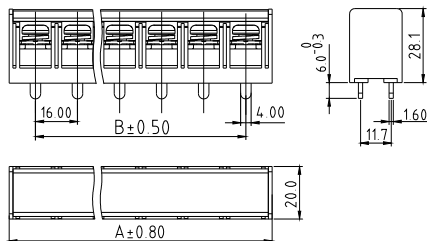


Materials Electrical

Rated:	600V 100A
Insulation Withstands Voltage:	AC3000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	26 Lb-In
Suitable Electric Wire:	10~3AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.6t Tin Plated
3)Terminal Screw:	Steel M6.0 Ni Plated
Approval:	


N=Number of poles (2p~10p)

Dim A	(N-1)*16+20
Dim B	(N-1)*16

YK-902 PITCH-16.0mm W/O cover



Tail length: 6.0mm

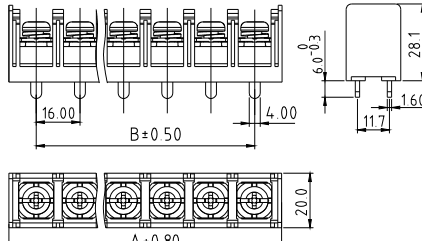

Materials Electrical


Rated:	600V 100A
Insulation Withstands Voltage:	AC3000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	26 Lb-In
Suitable Electric Wire:	10~3AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 1.6t Tin Plated
3)Terminal Screw:	Steel M6.0 Ni Plated
Approval:	

N=Number of poles (2p~10p)


Dim A	(N-1)*16+20
Dim B	(N-1)*16

Barrier Terminal Block

YJ-114 PITCH-11.4mm




YJ1140200000G*

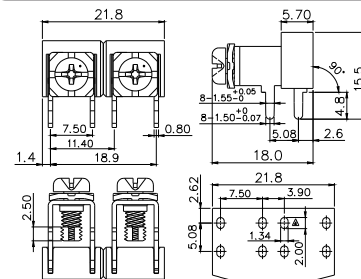


Materials Electrical

Rated:	300V 30A
Insulation Withstands Voltage:	AC2000V/min
Insulation Resistance:	1000MΩ or more at DC500V
Using Temperature Range:	-40°C~+115°C
Screw Torque Value:	9.5 Lb-In
Suitable Electric Wire:	22~12AWG
1)Molded Parts:	Thermoplastic UL94V-0 Black
2)Terminal:	Brass 0.8t Tin Plated
3)Terminal Screw:	Steel M3.5 Ni Plated
Approval:	 pending

YJ-100 PITCH-21mm



Power terminal 74A
YJ1000310000G*

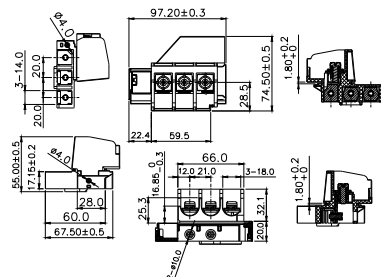


Materials Electrical

Rated:	600V 74A
Withstanding Voltage:	2.2KV


Using Temperature Range: -40°C~+115°C

Screw Torque Value:	4.4Nm
Suitable Electric Wire:	8~1/0AWG
1)Molded Parts:	PBT(UL94V-0)
2)Terminal:	Brass, Bright Tin over Ni plating
3)Terminal Screw:	M5
Approval:	

YJ-100 PITCH-21mm



Power terminal 114A
YJ1000321000G*

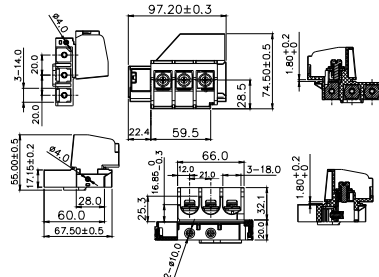


Materials Electrical

Rated:	600V 114A
Withstanding Voltage:	2.2KV


Using Temperature Range: -40°C~+115°C

Screw Torque Value:	7.8Nm
Suitable Electric Wire:	8~1/0AWG
1)Molded Parts:	PBT(UL94V-0)
2)Terminal:	Brass, Bright Tin over Ni plating
3)Terminal Screw:	M6
Approval:	

YJ-100 PITCH-21mm



Power terminal 140A
YJ1000331000G*

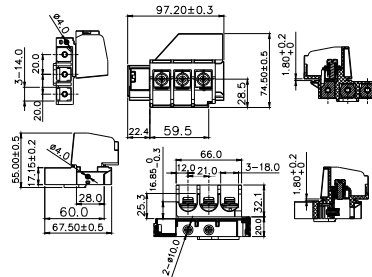

Materials Electrical

Rated:	600V 140A
Withstanding Voltage:	2.2KV

Using Temperature Range: -40°C~+115°C

Screw Torque Value:	7.8Nm
Suitable Electric Wire:	8~1/0AWG
1)Molded Parts:	PBT(UL94V-0)
2)Terminal:	Copper, Bright Tin over Ni plating
3)Terminal Screw:	M6
Approval:	


AB	00	0	0	X Color	0	X	X	X	X	X
						9 White(RAL 1102)	0000 Standard	G ROHS compliant		

AC	XX Number of contacts	X Pitch	0	X Color	X Inlet hole type	X	X	X	X	X
	Solid Block 22 22 contacts	5 5.08/.20"	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0 Only close the left inlet hole 1 Only close the right inlet hole 2 Left and right inlet holes are not closed	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy				

AD	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	Solid block 16 16 contacts 18 18 contacts	5 5.08/.20"	5 Green(RAL 6018/T)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

AE	00	0	0	X Color	0	X	X	X	X	X
						2 Red(RAL 3001/D)	0000 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

AF	00	0	0	X Color	0	X	X	X	X	X
						2 Red(RAL 3001/D)	0000 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

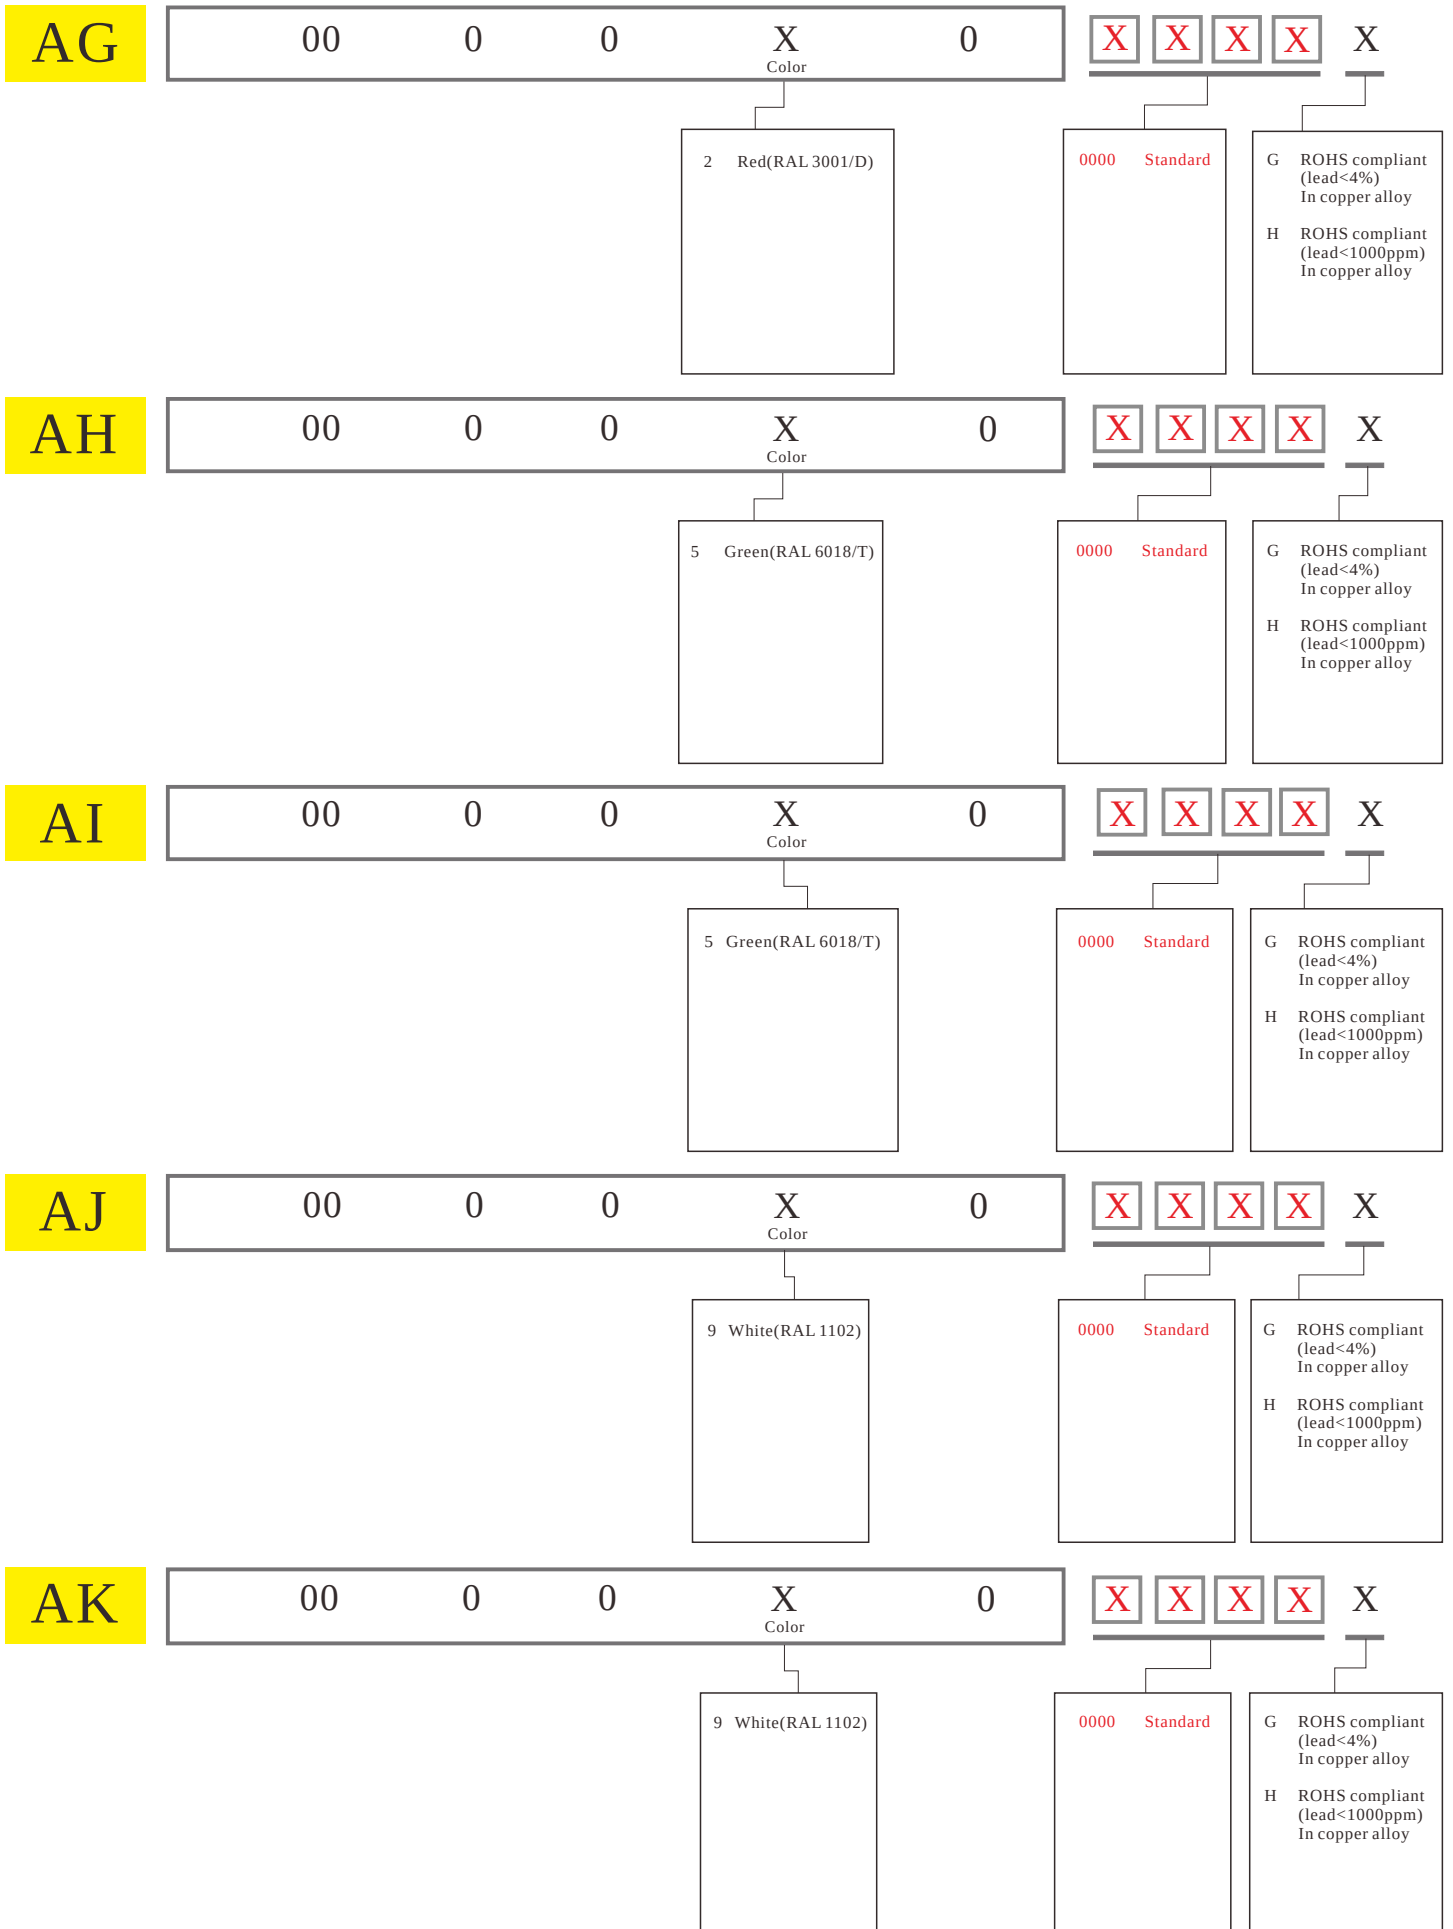

AL

XXXX PCB length		X Color	X Rail type	X	X	X	X	X
0450 45.0mm 0505 50.5mm 1000 100.0mm . . .	5 Green (RAL 6018/T)	0 Width 72mm(assembled cover) 1 Width 107mm(assembled cover) 2 Width 72mm(but not assembled cover) 3 Width 107mm(but not assembled cover) 4 Width 122mm(assembled cover) 5 Width 122mm(but not assembled cover) 6 Width 2-72mm(assembled cover) 7 Width 2-72mm(but not assembled cover)	000A Our Standard W72 Rail(1=PCB L-1.8) W107 Rail(1=PCB L-3.8) 0001A Special type 0002A Special type 0003A Special type Serial number	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

AM

00	0	0	X Color	X Body type	X	X	X	X	X
			0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) C Green(RAL 6018/U)	0 15.2mm 1 20.2mm	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

AN


XX Number of contacts	00	X Color	0	X	X	X	X	X	X
00 4 contacts (EU) (B type, E6) 02 2 contacts (EU) 03 3 contacts (EU5.0)		2 Red(RAL 3001/D) 5 Green(RAL 6018/T)		0000 Standard Any special item by customer request, please contact sales department. 0010 4 contact-B type	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				






ANAA

00	X	0	X	X	X	X	X	X	X
	0 Black 5 Green(RAL 6018/T) 6 Blue(RAL 5015/D) 8 Grey(RAL 7035/D)		0000 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

AO

00	0	0	X Contact	0	X	X	X	X	X
			0 Wire range(0.5-1.0mm²) (pitch 3.81) 1 Wire range(0.5-1.0mm²) (pitch 5.08) 2 Wire range(1.5-2.5mm²) (pitch 5.08)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

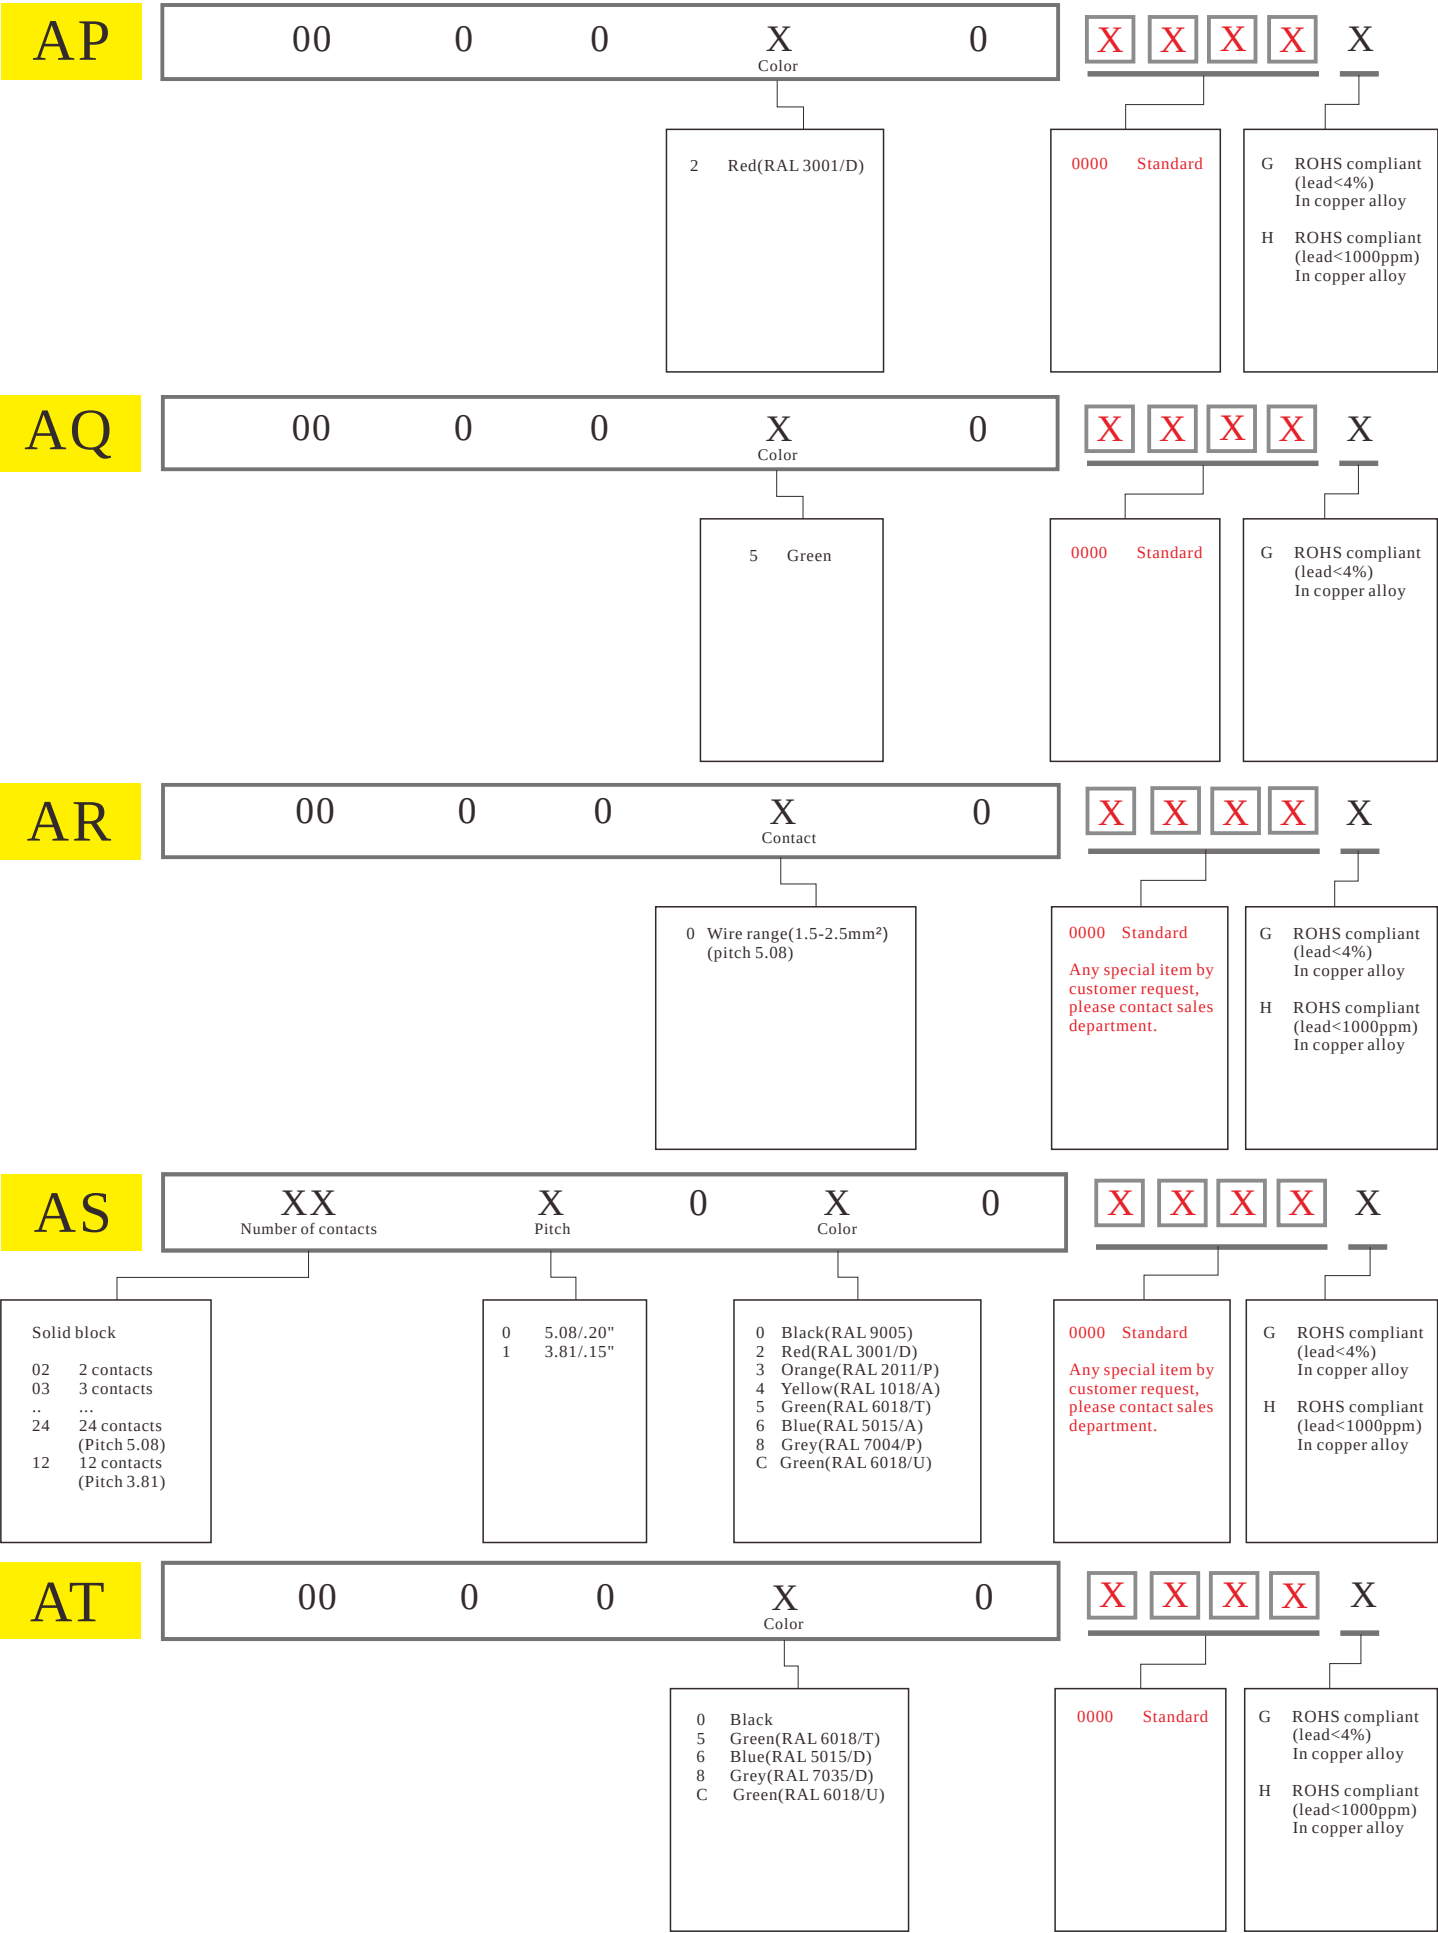

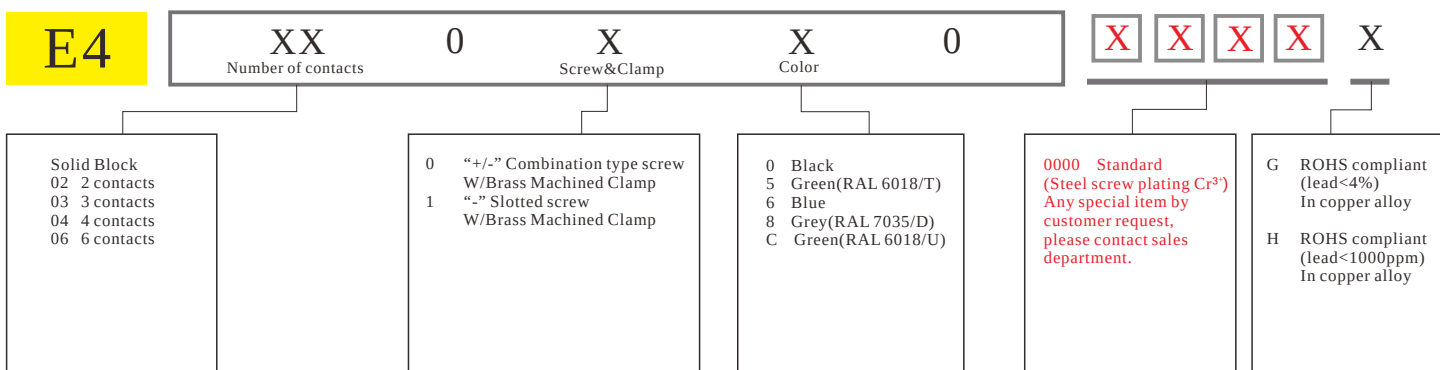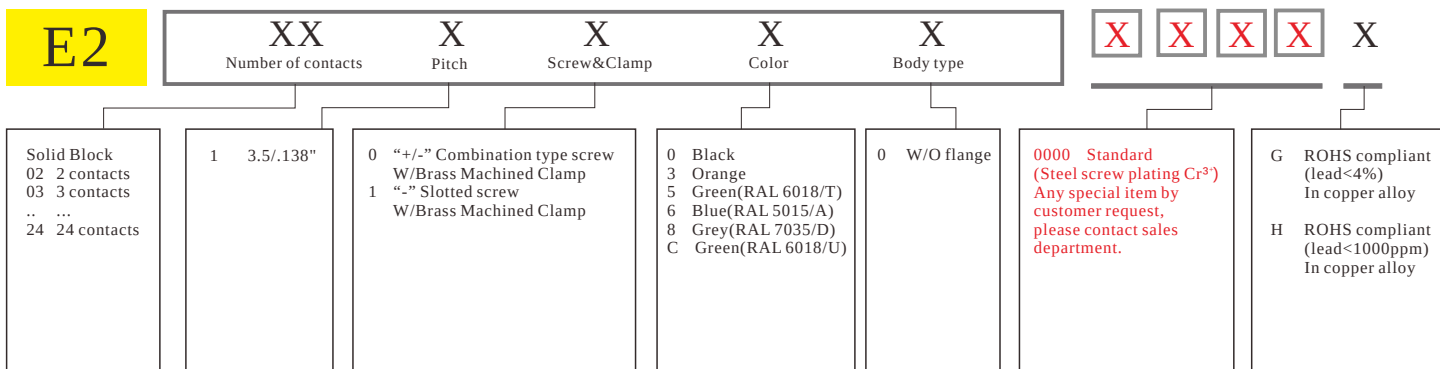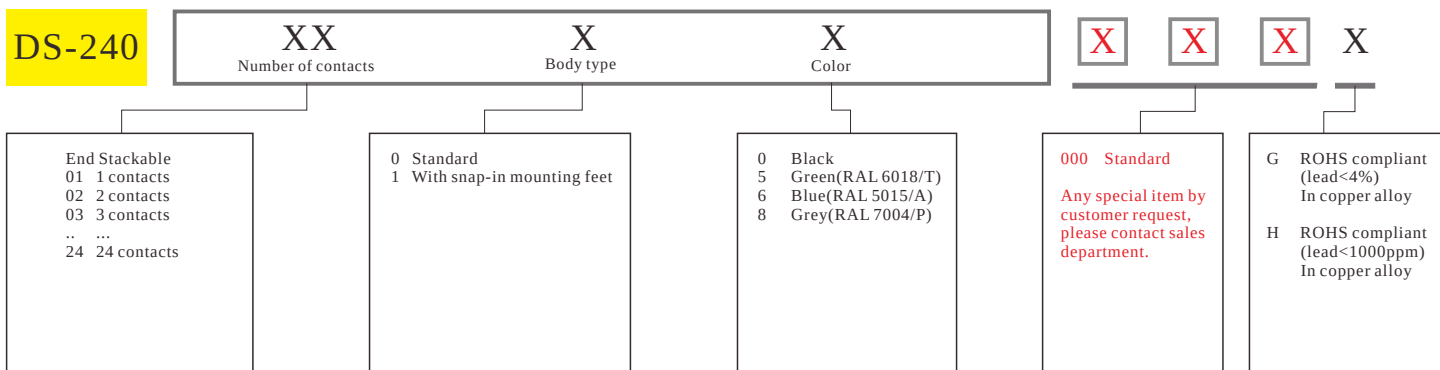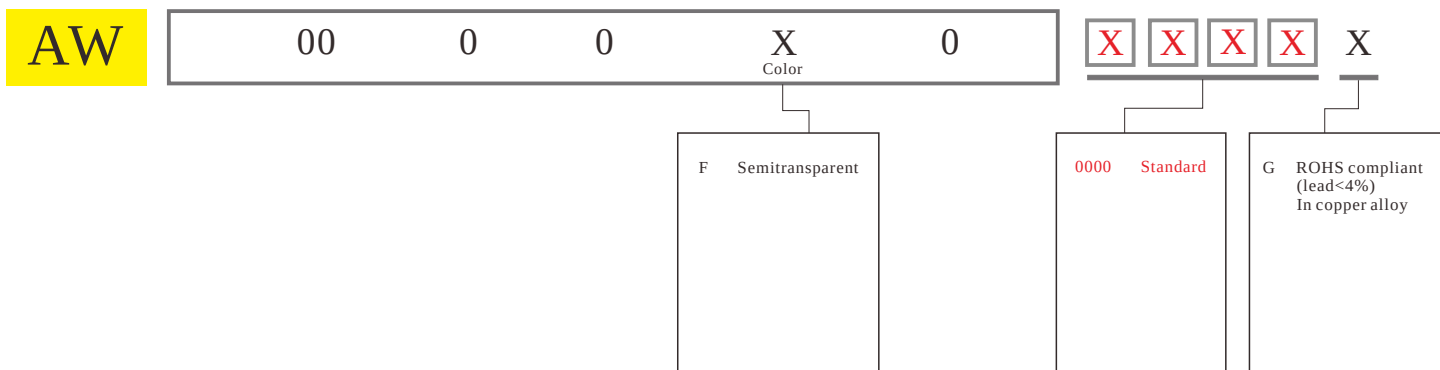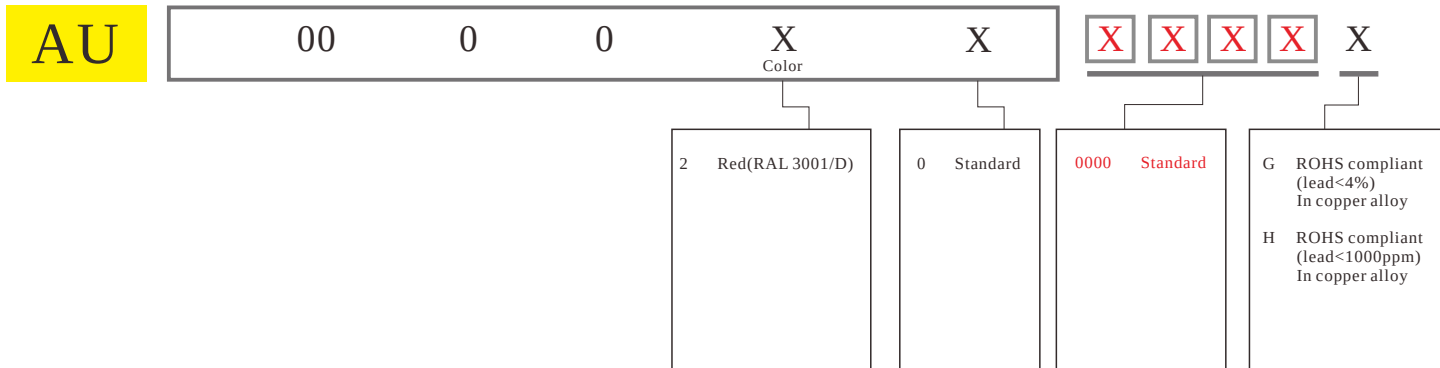

E5

XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
---------------------------------	-------------------	-------------------------	-------------------	----------	----------	----------	----------	----------	----------

Solid Block
06 2*3 contacts
08 2*4 contacts
.. ..
48 2*24 contacts
24 2*12 contacts

28 2*14 contacts
32 2*16 contacts

0 6.35/.25"

Screw type
0 "+/-" Combination type screw
W/Brass Machined Clamp
1 "- " Slotted screw
W/Brass Machined Clamp

B Screwless type

0 Black
2 Red
3 Orange
4 Yellow
5 Green
(RAL 6018/T)
6 Blue
8 Grey
9 White
C Green
(RAL 6018/U)

0000 "@ " Logo(Standard)
000A "ANYTEK" Mark

Any special item by
customer request,
please contact sales
department.

G ROHS compliant
(lead<4%)
In copper alloy

H ROHS compliant
(lead<1000ppm)
In copper alloy

E6

XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Direction of pin	X	X	X	X	X
---------------------------------	-------------------	-------------------------	-------------------	------------------------------	----------	----------	----------	----------	----------

Solid Block
02 2 contacts
03 3 contacts
04 4 contacts

0 5.0/.197"

0 "+/-" Combination type screw
W/Brass Machined Clamp
1 "- " Slotted screw
W/Brass Machined Clamp

0 Black
5 Green(RAL 6018/T)
6 Blue
8 Grey(RAL 7035/D)
C Green(RAL 6018/U)

0 Right
1 Left

0000 Standard
(Steel screw plating Cr³)
Any special item by
customer request,
please contact sales
department.

G ROHS compliant
(lead<4%)
In copper alloy

H ROHS compliant
(lead<1000ppm)
In copper alloy

E7

XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
---------------------------------	-------------------	-------------------------	-------------------	----------	----------	----------	----------	----------	----------

Solid Block
02 2 contacts
03 3 contacts
.. ..
20 20 contacts
(pitch 5.0)
10 10 contacts
(pitch 10.0)

0 5.0/.197"
1 10.0/.394"

0 "+/-" Combination type screw
W/Brass Machined Clamp
1 "- " Slotted screw
W/Brass Machined Clamp

0 Black
5 Green(RAL 6018/T)
6 Blue
8 Grey(RAL 7035/D)
C Green(RAL 6018/U)

0000 Standard
(Steel screw plating Cr³)
Any special item by
customer request,
please contact sales
department.

G ROHS compliant
(lead<4%)
In copper alloy

H ROHS compliant
(lead<1000ppm)
In copper alloy

E8

XX Number of contacts	X Pitch	0	X Color	X	X	X	X	X	X
---------------------------------	-------------------	----------	-------------------	----------	----------	----------	----------	----------	----------

Solid Block
06 2*3 contacts
08 2*4 contacts
.. ..
48 2*24 contacts

0 6.35/.25"

0 Black
2 Red
3 Orange
4 Yellow
5 Green
(RAL 6018/T)
6 Blue
8 Grey
9 White
C Green
(RAL 6018/U)

0 Three row PIN
1 Two row PIN

0000 "@ " Logo(Standard)
000A "ANYTEK" Mark

Any special item by
customer request,
please contact sales
department.

G ROHS compliant
(lead<4%)
In copper alloy

H ROHS compliant
(lead<1000ppm)
In copper alloy

E9

XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
---------------------------------	-------------------	-------------------------	-------------------	----------	----------	----------	----------	----------	----------

End Stackable
01 1 contacts
02 2 contacts
03 3 contacts
.. ..
12 12 contacts

7 15.24/.6"

4 "+/-" Combination type screw
W/Steel Stamping Clamp
5 "- " Slotted screw
W/Steel Stamping Clamp

0 Black
2 Red
3 Orange
4 Yellow
5 Green
(RAL 6018/T)
6 Blue
8 Grey
9 White
C Multiple colors

0000 "@ " Logo(Standard)
000A "ANYTEK" Logo

Any special item by
customer request,
please contact sales
department.

G ROHS compliant
(lead<4%)
In copper alloy

H ROHS compliant
(lead<1000ppm)
In copper alloy

EB	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
End Stackable 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 5.0/5.08) 24 2*12 contacts (pitch 10.0/10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) C Green(RAL 6018/U)	0 With cover (Solder pin staggered by half pin spacing) 1 W/O cover (Solder pin staggered by half pin spacing) 3 W/O cover (Solder pin in line)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

EC	XX Number of contacts	X Pitch	X Screw&Terminal	X Color	X Body type	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 16 16 contacts	1 3.5/.138"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black	0 Without pillar & with cover 1 With pillar & with cover	B000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

ED	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.81) 12 12 contacts (pitch 7.62)	3 3.81/.15" 4 7.62/.30"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) C Green(RAL 6018/U)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

EF	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	0 5.0/.197"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

EH	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5) 12 12 contacts (pitch 7.0)	2 3.5/.138" 3 7.0/.276"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) C Green(RAL 6018/U)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

EI	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Pin type	Body type			
Solid Block 02 2 contacts 03 3 contacts 10 10 contacts	C 15.0/.591"	1 "-" Slotted screw W/Steel Stamping Clamp 2 "*" Posidriv screw W/Steel Stamping Clamp 3 "+/-" Combination type W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	2 Middle contact(single)+ side contact(single) 3 Middle contact(double)+ side contact(double)	0 Without flange 1 With flange	000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

EJ	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Pin type				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 06 06 contacts	D 19.0/.748"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	1 Middle contact(double)+ side contact(double) W/O flange		0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

EK	XX	X	X	X	0	X	X	X	X
	Number of contacts	Pitch	Screw&Terminal body	Color					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts	2 5.08/.2"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) C Green(RAL 6018/U)			0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

EL	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	1 3.5/.138"	1 Open 2 Close 5 With flange	THR type 0 Black DIP type 0 Black 6 Blue 2 Red 8 Grey 3 Orange 9 White 4 Yellow C Green (RAL 6018/U) 5 Green (RAL 6018/T)	THR type A Vertical (tail length: 1.5mm) B Right angle (tail length: 1.5mm) DIP type 2 Vertical (tail length: 3.2mm) 3 Right angle (tail length: 3.2mm)		0000 Standard B000 THR tape reel (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

EM	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 16 16 contacts (pitch 7.5&7.62)	0 7.62/.30" 5 5.08/.20" 7 5.0/.197" A 7.5/.2953"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Without flange 2 With flange		0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	Y ROHS compliant (lead<4%) In copper alloy (low current) G ROHS compliant (lead<4%) In copper alloy (high current) H ROHS compliant (lead<1000ppm) In copper alloy		

EN	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts	0 12.5/.492"	4 "+/-" Combination type screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy				

EO	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts (pitch 5.0) 06 6 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 Two beam contact (Hole Dim 1.9mm) (with EP Φ1.0mm) 2 Six finger contact (Hole Dim 1.9mm) (with EX Φ1.3mm L=16.0mm)	0000 Standard A000 High type (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

EP	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Pin length	Pin plating						
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 13.75mm pin(Φ1.0*1.0)	0 Tin plated	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

EQ	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Wire entry					
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp 4 "+/-" Combination type screw W/Steel Stamping Clamp 5 "- Slotted screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 90D wire inlet (Vertical) 1 180D wire inlet (Horizontal)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

ER	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Wire entry					
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts	0 3.5/.138"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 180D wire inlet (Horizontal) 1 90D wire inlet (Vertical)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

ES	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts	0 5.0/.197"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

ET	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type					
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts (pitch 7.62) 08 8 contacts (pitch 15.24) 12 12 contacts (pitch 7.62 With latch)	0 7.62/.30" 1 15.24/.60"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp 2 "Posidriv screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	Used for VC series(300V 32A) 0 Without flange 2 With flange(W/O handle) 3 W/flange & W/handle (only 3p & 4p) Used for KT series(600V 41A) A Without flange B With latch C With flange(W/O handle) D W/flange & W/handle (only 3p & 4p)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

EU	XX	X	0	X	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Direction of pin					
Solid Block 02 2 contacts (only pitch 5.0) 03 3 contacts 04 4 contacts 05 5 contacts (only pitch 3.5)	1 3.5/.138" 7 5.0/.197"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Right 1 Left	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

EV	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts	6 10.16/.40"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 With flange (without handle) 2 With flange (with handle) (only 3p & 4p)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

EW	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	Tail type					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts	6 10.16/.40"	1 Close 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle (PCB down) 2 Right angle (PCB up)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

EX	XX Number of contacts	X Pitch	X Pin plating	X Color	X Pin length	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 Tin plating 1 G/F plating	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7035/D)	0 12.9mm pin(for TX series) (up Φ1.3, down Φ1.0) 1 16.0mm pin(for EO series) (up Φ1.3, down Φ1.0) 2 16.0mm pin(for EO series) (up Φ1.4, down Φ1.0)	0000 Standard A000 Match EO high type Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

EY	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	A Hook on entry side B Hook on back side	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

EZ	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	7 5.0/.197" 5 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 2 With flange	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

FW	XX Number of contacts	X Pitch	X Pin length	X Plated	X Package	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 12 12 contacts 06 6 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 10.15mm & 16.3mm 1 10.4mm 2 15.5mm 3 14.2mm 4 16.0mm 5 13.0mm	0 Tin 1 No plated 2 G/F	0 T&R package 1 T/B package	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

GA	001	XX Number of contacts	X Body Color	0	X	X	X	X
	01 1 contacts 02 2 contacts 24 24 contacts (pitch 5.0)	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue 8 Grey 9 White C Green	Three alphanumeric digits Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy				

GB	001	XX Number of contacts	X Tail Type	X Body Color	X X X X
	01 1 contacts 02 2 contacts 24 24 contacts (pitch 5.0)	0 Without Switch 1 With Switch	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue 8 Grey 9 White C Green	Three alphanumeric digits Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy

GW	XX Number of contacts	X Pitch(PIN spacing)	X Pin length	X Plated	X Package	X X X X X
	02 2 contacts 03 3 contacts 04 4 contacts 12 12 contacts	0 5.0/.197"	8 12.0mm	0 Tin 2 G/F	0 T&R package 1 T/B package	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department. G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H2	XX Number of contacts	X Pitch	0	X Color	0	X X X X X
	End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts (pitch 7.5) 12 12 contacts (pitch 10.0)	0 7.5/.295" 1 10.0/.394"		0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0000 Standard Any special item by customer request, please contact sales department. G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H3	XX Number of contacts	X Pitch	0	X Color	0	X X X X X
	End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 7.5/.295" 2 10.0/.394"		0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0000 Standard Any special item by customer request, please contact sales department. G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H4	XX Number of contacts	X Pitch	0	X Color	X Body type	X X X X X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	7 5.00/.197" 5 5.08/.20"		0 Black 3 Orange 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	A W/O flange Hook on entry side B W/O flange Hook on back side C With flange Hook on entry side D With flange Hook on back side	0000 Standard Any special item by customer request, please contact sales department. G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H5	XX	X	0	X	X	X	X	X	
	Number of contacts	Pitch		Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81&5.0&5.08) 16 16 contacts (pitch 7.5&7.62)		1 3.5/.138" 3 3.81/.15" 7 5.0/.197" 5 5.08/.20" 0 7.62/.30" A 7.5/.295"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)		0 W/O flange 1 Flange with screw 2 Flange with nut		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H6	XX	X	0	X	0	X	X	X
	Number of contacts	Pitch		Color				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5) 12 12 contacts (pitch 10.0)		0 5.0/.197" 1 7.5/.295" 2 10.0/.393"		0 Black 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0000 Round hole 1000 Square hole Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H7	XX	X	0	X	X	X	X	X	
	Number of contacts	Pitch		Color	Foot print				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5)		0 5.0/.197" 1 7.5/.295"		0 Black 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0 Double row the 1st pole with center contact 1 Side single row 2 Center single row 3 Double row the 1st pole with side contact		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H8	XX	X	0	X	X	X	X	X	
	Number of contacts	Pitch		Color	Body type				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 12 12 contacts (pitch 10.0) 08 8 contacts (pitch 15.0&20.0)		0 10.0/.393" 1 15.0/.59" 2 20.0/.787"		0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7004/P)		0 W/O flange 1 With flange		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

H9	XX	X	0	X	0	X	X	X
	Number of contacts	Pitch		Color				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts		5 5.08/.20"		0 Black 3 Orange (RAL 2011/P) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

HA	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Insulator	Color						
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 2.54&3.81&5.0&5.08) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 10.0&10.16)	0 5.08/.20" 2 7.62/.30" 3 5.0/.197" 4 10.0/.394" 5 2.54/.10" 6 7.5/.295" 7 3.81/.15"	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0 Black 2 Red 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

HB	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	Lever					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.81&3.96&5.0) 16 16 contacts (pitch 7.5) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394" 2 7.5/.295" 3 3.81/.15" 4 3.96/.156"	1 Single wire 2 Double wire (only 5.0/7.5/10.0)	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P)	0 With lever 1 Without lever (Only single wire)	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

HC	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Lever	Color	Foot print					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 2.5&3.5) 12 12 contacts (pitch 7.0)	0 3.5/.138" 1 7.0/.276" B 2.5/.098"	0 Standard 2 High profile (only pitch 2.5)	2 Red (RAL 3001/D) 3 Orange (RAL 2011/P) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors	0 Double row center contact link together with end cover 1 Side single row 2 Center single row 3 Double row side contact link together with end cover	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

HD	XX	X	0	X	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Foot print					
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	0 5.08/.20"	8 Grey body(RAL 7004/P) Orange lever(RAL 2011/P)	0 Double row	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

HE	XX	X	0	X	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Lever					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 12 12 contacts (pitch 2.5&2.54) 08 8 contacts (pitch 5.0&5.08)	4 2.5/.098" 5 2.54/.10" 0 5.0/.197" 2 5.08/.20"	0 Black 3 Orange(RAL 2011/P) (pitch 2.5/2.54) 4 Orange(RAL 2011/P) (pitch 5.0/5.08) 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7004/P)	0 With lever 1 Without lever	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

HF	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type				
01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts 12 12 contacts (pitch 10.0)	7 5.0/.197" 8 10.0/.394" (only low profile type)	High profile body 8 Grey(RAL 7004/P) 9 Orange(RAL 2011/P)		1 High profile body (Solid block) 2 Low profile body (End stackable)		0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	
		Low profile body 0 Black 5 Green 1 Natural color 6 Blue 2 Red 8 Grey 3 Orange 9 White 4 Yellow C Multiple colors							

HG	XX	X	0	X	0	X	X	X	X
	Number of contacts	Pitch		Color					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 2 7.5/.295" 3 5.08/.20" 4 10.16/.40" 5 7.62/.30" 6 12.7/.50"	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors				0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HH	XX	X	0	X	0	X	X	X	X
	Number of contacts	Pitch		Color					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts	0 5.00/.197"	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors				0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HI	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	Body type				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5&7.62)	0 5.0/.197" 2 7.5/.295" 3 7.62/.30"	0 Hook+pillar 1 Holder+pillar (100% protected against mismatching)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 W/O flange 2 With flange 3 With latch	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

HM	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Contact type				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 10.0&10.16)	3 3.81/.15" 4 7.62/.30" 5 5.08/.20" 6 10.16/.40" 7 5.0/.197" 8 10.0/.394" 9 7.5/.295"	0 Black 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7004/P)		0 Dip solder 1 Press-fit	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

HN	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts		1 3.5/.138" 5 5.08/.20"		0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D)		0 Without flange 2 With flange		0000 Standard Any special item by customer request, please contact sales department.	
								G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HO	XX	X	0	X	0	X	X	X	X
	Number of contacts	Pitch		Color					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts		0 5.0/.197" 2 7.5/.295"		0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)				0000 Standard Any special item by customer request, please contact sales department.	
								G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HP	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts		3 3.81/.15" 5 5.08/.20"		0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D)		0 Without flange 2 With flange		0000 Standard Any special item by customer request, please contact sales department.	
								G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HQ	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Contact type				
End Stackable 02 2*1 contacts 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 5.0&5.08) 32 2*16 contacts (pitch 7.62) 24 2*12 contacts (pitch 10.16)		0 5.0/.197" 3 5.08/.20" 5 7.62/.30" 4 10.16/.40"		0 Black(RAL9005) 2 Red(RAL3001/D) 3 Orange(RAL2011/P) 4 Yellow(RAL1018/A) 5 Green(RAL6018/T) 8 Grey(RAL7004/P) 9 White(RAL1102) C Multiple colors		0 Solder pin in line 1 Solder pins staggered by half pin spacing		0000 Standard Any special item by customer request, please contact sales department.	
								G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HR	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Contact type				
End Stackable 03 3*1 contacts 06 3*2 contacts 09 3*3 contacts 72 3*24 contacts (pitch 5.08) 48 3*16 contacts (pitch 7.62) 36 3*12 contacts (pitch 10.16)		3 5.08/.20" 5 7.62/.30" 4 10.16/.40"		0 Black 3 Orange (RAL 2011/P) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0 Solder pin in line 1 Solder pins staggered by half pin spacing		0000 Standard Any special item by customer request, please contact sales department.	
								G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HS	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
End Stackable 04 4*1 contacts 08 4*2 contacts 12 4*3 contacts ... 96 4*24 contacts (pitch 5.0&5.08) 64 4*16 contacts (pitch 7.5&7.62) 48 4*12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 7.5/.295" 2 10.0/.394" 3 5.08/.20" 4 10.16/.40" 5 7.62/.30"	0 Black 3 Orange (RAL 2011/P) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors	0 Solder pin in line 1 Solder pins staggered by half pin spacing	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

HT	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts ... 24 24 contacts (pitch 5.0&5.08) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 2 7.5/.295" 3 5.08/.20" 4 10.16/.40" 5 7.62/.30"	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy						

HU	XX Number of contacts	X Pitch	X Screw & Clamp	X Color	0	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts ... 08 8 contacts	0 5.08/.20" 1 10.16/.40"	0 "+/-" Combination type 1 "-" Slot type	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy					

HV	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts ... 24 24 contacts (pitch 3.81) 12 12 contacts (pitch 7.62)	3 3.81/.15" 4 7.62/.30"	8 Grey (RAL 7004/P) 9 Orange (RAL 2011/P)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy						

HW	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts ... 24 24 contacts (pitch 2.5&3.5&3.81) 16 16 contacts (pitch 7.5&7.62)	B 2.5/.098" 1 3.5/.138" 3 3.81/.15" A 7.5/.295" 0 7.62/.30"	0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D)	0 W/O flange 2 With flange (Only pitch 3.5/3.81/ 7.5/7.62)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

HW	XX Number of contacts	X Pitch	0	X Color	X Body type	X X X X X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20" 7 5.0/.197"	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 W/O flange Contact on down side 1 W/O flange Contact on up side 2 With flange Contact on down side 3 With flange Contact on up side 4 W/O flange Contact in the middle(only pitch 5.08) 5 With flange Contact in the middle(only pitch 5.08)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HW	XX Number of contacts	X Pitch	0	X Color	0	F X X X X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	F000 Standard for hook on back side Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy		

HW	XX Number of contacts	X Pitch	0	X Color	X Body type	X X X X X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	6 With latch holder (Contact on down side)	0000 Standard @ Logo 000A Standard ANY Logo Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

HX	XX Number of contacts	X Pitch	X Insulator	X Color	X Body type	X X X X X
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts	0 5.0/.197" 2 3.5/.138"	0 Vertical(90D wire inlet) 1 Horizontal(180D wire inlet) 0 Vertical(90D wire inlet) -Interlace(A type)(only pitch 3.5mm) 1 Vertical(Single contact) (90D wire inlet)(B type)(only pitch 3.5mm) 2 Horizontal(180D wire inlet) -Interlace(A type)(only pitch 3.5mm) 3 Horizontal(180D wire inlet) (B type)(Double contact)(only pitch 3.5mm) 4 Horizontal(90D wire inlet) (B type)(Double contact)(only pitch 3.5mm)	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) 9 White (RAL 1002) C Multiple colors	0 Bevel angle (only pitch 5.0) 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

HY	XX Number of contacts	X Pitch	0	X Color	0	X X X X X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts	0 5.0/.197"	8 Grey(RAL 7004/P) body +White lever	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

K3	XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
	Solid Block 06 3*2 contacts 09 3*3 contacts 36 3*12 contacts 72 3*24 contacts	1 3.5/.138"	1 Close 2 With flange 3 With latch holder	0 Black 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) C Green(RAL 6018/U)	0 Vertical 1 Right angle	A000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

K4	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 04 4 contacts 24 24 contacts	5 5.08/.20"	2 "+/-" Combination type W/Zinc Alloy Clamp 3 "- " Slotted screw W/Zinc Alloy Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 Mounting fixed type (Without dip solder) 2 Dip solder type (Open stackable type)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

K5	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 With flange 2 With latch	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

K6	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 4.5) 12 12 contacts (pitch 9.0)	0 4.5/.177" 1 9.0/.354"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

K7	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Direction of pin	X	X	X	X	X
	Solid Block 03 3 contacts	0 7.5/.295"	2 "+/-" Combination type screw W/Zinc Alloy Clamp(square hole) 3 "- " Slotted screw W/Zinc Alloy Clamp(square hole)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Right 1 Left	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

K8

XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.81) 12 12 contacts (pitch 7.62)	3 3.81/.15" 4 7.62/.30"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) 9 White C Green (RAL 6018/U)	0 W/O flange 2 With flange	0000 Standard Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

K9

XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Pin type	X Body type	X	X	X	X
Solid Block 01 1 contacts 02 2 contacts 10 10 contacts (pitch 15.0) 08 8 contacts (pitch 17.5)	C 15.0/.591" D 17.5/.689"	1 "- Slotted screw W/Steel Stamping Clamp 2 "*" Posidriv screw W/Steel Stamping Clamp 3 "+/-" Combination type W/Steel Stamping Clamp 4 "*" Torx screw W/Steel Stamping Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) 9 White C Green (RAL 6018/U)	2 Single tail 3 Double tail	0 W/O flange 1 With flange	000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.			G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

KD

XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts	B 2.54/.10"		0 Black 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7035/D) 9 White C Green(RAL 6018/U)	0 Female contact: Tin plated 1 Female contact: Au plated	0000 Standard @ Logo 000A Standard ANY Logo Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy

KD

XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	1 3.5/.138" 3 3.81/.15" 7 5.0/.197" 5 5.08/.20"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 W/O flange 1 With flange 2 With latch	0000 Standard A000 Double level (only pitch 3.5mm) Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

KE

XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts 32 2*16 contacts (THR type)	1 3.5/.138" 3 3.81/.15"	THR type A Close B With flange C With latch holder DIP type 1 Close 2 With flange 3 With latch holder	THR type 0 Black DIP type 0 Black 6 Blue 2 Red 8 Grey 3 Orange 9 White 4 Yellow C Green 5 Green (RAL 6018/U) (RAL 6018/T)	0 Vertical 1 Right angle	0000 THR type A000 DIP type Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

KE	XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
	Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts 32 2*16 contacts (THR type) 24 2*12 contacts (pitch 10.0&10.16)	7 5.0/.197" 5 5.08/.20" 8 10.0/.394" (DIP type) 6 10.16/.40" (DIP type)	1 Close 2 With flange 3 With latch holder 4 Open (pitch 5.0&10.0)	THR type 0 Black DIP type 0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 6018/U) 9 White C Green (RAL 6018/U)	THR type 0 Vertical 1 Right angle DIP type 2 Vertical 3 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KF	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&5.0) 16 16 contacts (pitch 7.5)	1 3.5/.138" 7 5.0/.197" A 7.5/.295"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KG	XX Number of contacts	0	0	X Color	0	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)			0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7035/D)		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KH	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X PCB mounting	X	X	X	X	X
	End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts (pitch 6.35&7.62)	0 6.35/.25" 1 7.62/.304"	4 "+/-" Combination type W/Steel Stamping Clamp 5 "- " Slotted screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

KI	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	3 3.81/.15" 5 5.08/.20"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 W/O flange (with high profile) 2 With flange 3 With flange (with high profile)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KJ	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts		6 10.16/.40"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KK	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts		6 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 Flange with screw (without handle) 2 Flange with screw (with handle) (only 3p&4p) 3 Flange with nut (without handle) 4 Flange with nut (with handle) (only 3p&4p)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

KL	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	Tail type					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts		6 10.16/.40"	1 Close 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle (PCB down) 2 Right angle (PCB up)	0000 Standard Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

KO	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Contact type					
End Stackable 02 2 contacts 03 3 contacts 16 16 contacts		2 9.52/.374"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Back single row 1 Solder pins staggered by half pin spacing	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

KP	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Contact type					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts (pitch 6.35) 12 12 contacts (pitch 10.16)		0 6.35/.25" 2 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0 Solder pins staggered by half pin spacing 1 Back single row 2 Front single row	0000 Without cover 1000 With cover Any special item by customer request, please contact sales department.		G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

KQ	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail type				
End Stackable 02 2 contacts 03 3 contacts 12 12 contacts	6 10.16/.40"	2 "+/-" Combination type W/Zinc Alloy Clamp 3 "- " Slotted screw W/Zinc Alloy Clamp	0 Black	0 A type (Solder pin size 1.6*1.2) 1 B type (Solder pin size 1.0*1.0)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KR	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Without hook 1 With hook	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KS	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	Tail type				
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts	0 7.62/.30"	1 W/O flange 2 W/flange	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0 Vertical 1 Right angle (PCB down) 2 Right angle (PCB up)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KT	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts 12 12 contacts (Through the panel)	0 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp 2 "*" Posidriv screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 2 With flange nut 3 W/flange nut & W/handle (only 3p & 4p) 4 With flange screw 5 W/flange screw & W/handle (only 3p & 4p) D W/flange nut & Through the panel	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KU	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 02 2 contacts 03 3 contacts 10 10 contacts (pitch 15.0)	C 15.0/.591"	0 Close 1 With flange 2 With flange (and shield feed-through on the inside of the device -only 4p)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KV	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 With hook&low profile 1 Flange with screw&low profile 2 Flange with nut&low profile 3 With hook&high profile 4 Flange with screw&high profile 5 Flange with nut&high profile	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

KX	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 10 10 contacts (pitch 15.0)	C 15.0/.591"	1 "- Slotted screw W/Steel Stamping Clamp 2 "*" Posidriv screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 With flange 2 With flange (with handle) (only 4p)	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

KY	XX Number of contacts	X Pitch	X Screw&Terminal	X Color	X Body type	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0mm) 12 12 contacts (pitch 10.0mm)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Horizontal(180D) Square hole 1 Vertical(90D) Square hole 2 Horizontal(180D) Round hole 3 Vertical(90D) Round hole	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

KZ	XX Number of contacts	X Pitch	X Screw&Terminal	X Color	X Cage type	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5mm) 12 12 contacts (pitch 7.0mm)	1 3.5/.138" 2 7.0/.276" 7 5.0/.197" 8 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Square hole 1 Round hole	0000 Standard (Steel screw plating Cr ³) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

N4	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
	Solid Block 36 2*18 contacts (With operating lever)	1 3.5/.138"	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	3 With operating lever	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy				

N6	XX	X	0	X	X	X	X	X
	Number of contacts	Pitch		Color	Tail Length			
Solid Block 02 2 contacts 03 3 contacts 20 20 contacts	3 6.35/.25"	0 Black 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 8 Grey 9 White	0 3.7mm	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

N9	XX	X	0	X	X	X	X	X
	Number of contacts	Pitch		Color	Tail Length			
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts	1 3.81/.15"	0 Black 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 8 Grey 9 White	0 2.1mm	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

NA	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	PCB mounting	Color	Tail type			
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts	B 2.5/.098" 5 2.54/.10"	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7004/P)	0 Double tail A type(standard) 1 Single tail B type 2 Single tail C type	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

NB	XX	X	0	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type			
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5)	7 5.0/.197" A 7.5/.295"	0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7035/D)	0 Without flange 1 With flange 2 Without flange, 100% protected against mismatching 3 With flange, 100% protected against mismatching 4 With snap-in mounting feet 5 With snap-in mounting feet 100% protected against mismatching	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

NC	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting			
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5)	7 5.0/.197" A 7.5/.295"	1 Without hook holder 2 With hook holder (100% protected against mismatching)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

ND	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&5.0) 16 16 contacts (pitch 7.5)	1 3.5/.138" 7 5.0/.197" A 7.5/.295"		0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NE	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5)	0 5.0/.197" 2 7.5/.295"		0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7004/P)		0000 Standard Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NF	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
	Solid Block 01 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 W/O flange 1 W/flange 2 With latch	0000 Standard Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NH	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts (pitch 3.5) 24 24 contacts (pitch 5.0)	1 3.5/.138" 7 5.0/.197"		0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0000 Standard Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NI	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts	3 3.81/.15" 5 5.08/.20"		0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors		0000 Standard Any special item by customer request, please contact sales department.				G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NI (THR)	XX X A X				X X X X X X					
	Number of contacts	Pitch	Body type	Color						
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts 12 12 contacts pitch 7 62 & 0 16)	3 3.81/.15" 5 5.08/.20" 4 7.62/.30" 6 10.16/.40"	THR type	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 8 Grey 9 White C Multiple colors	00000 Standard Any special item by customer request, please contact sales department.						G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy

NJ	XX X X X 0				X X X X X					
	Number of contacts	Pitch	PCB mounting	Color						
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts	0 5.0/.197" 2 3.5/.138"	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0 Black 2 Red (RAL 3001/D) 5 Green (RAL 6018/T) 8 Grey (RAL 7004/P) C Multiple colors	0000 Standard Any special item by customer request, please contact sales department.						G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NK	XX X X X X					X X X X X					
	Number of contacts	Pitch	PCB mounting	Color	Tail type						
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts	A 7.5/.295"	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7004/P)	0 Parallel tail(A type) 1 Interlace tail(B type) (Front contact link together with end cover) 2 Interlace tail(C type) (After contact link together with end cover)	0000 Standard Any special item by customer request, please contact sales department.						G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

NK	XX X X X X					X X X X X					
	Number of contacts	Pitch	Body type	Color	PCB mounting						
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts	A 7.5/.295"	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/P) C Green (RAL 6018/U)	B Interlace tail(B type) (Front contact link together with end cover) 600V C Interlace tail(C type) (After contact link together with end cover) 600V	0000 Standard Any special item by customer request, please contact sales department.						F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy

NL	XX X X X X					X X X X X					
	Number of contacts	Pitch	Current	Color	Body type						
Solid Block 04 2*2 contacts 48 2*24 contacts (current 5A) 28 2*14 contacts (current 8A, With flange) 32 2*16 contacts (current 8A, W/O flange) 28 2*14 contacts (With operating lever) 36 2*18 contacts (With operating lever)	1 3.5/.138"	0 Low current(5.5A) 1 High current(8A)	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	1 With flange 2 W/O flange 3 With operating lever	0000 Standard Any special item by customer request, please contact sales department.						G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy

NM	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Wire inlet				
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts	1 3.5/.138"	THR type 0 Black DIP type 0 Black 6 Blue 2 Red 8 Grey 3 Orange 9 White 4 Yellow C Green (RAL 6018/U) 5 Green (RAL 6018/T)	THR type A Vertical(90D wire inlet) B Horizontal(180D wire inlet) C Slope(45D wire inlet) DIP type 0 Vertical(90D wire inlet) 1 Horizontal(180D wire inlet) 2 Slope(45D wire inlet)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

NP	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	PCB mounting	Color	Tail type				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 16 16 contacts	1 10.0/.393"	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7004/P)	0 Parallel tail(A type) 1 Interlace tail(B type) (Front contact link together with end cover) 2 Interlace tail(C type) (After contact link together with end cover)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

NQ	XX	X	X	X	0	X	X	X	X
	Number of contacts	Pitch	Body type	Color					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 10 10 contacts	0 2.5/0.10" 1 5.0/0.20" 2 4.0/0.16" 3 8.0/0.31"	0 With flange (Only 2.5&5.0) 1 Without flange	0 Black 1 Natural color 8 Grey	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

NQ	XX	X	1	X	0	X	X	X	X
	Number of contacts	Pitch		Color					
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts	4 3.0/.118" 5 6.0/.236"	0 Black(RAL 9005) 1 Natural color 8 Grey(RAL 7044) B White(RAL 9010)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy					

NR A type	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts	1 3.5/.138"	1 Close (THR type) 2 With flange (THR type) 3 Close (DIP type) 4 With flange (DIP type)	THR type 0 Black 1 Natural color DIP type 0 Black 6 Blue 1 Natural color 8 Grey 2 Red 9 White 3 Orange 4 Yellow 5 Green	0 Vertical (only @ Mark) 1 Right angle	Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

NR B type	XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
	Solid Block 04 2*2 contacts 06 2*3 contacts 40 2*20 contacts (B type)	1 3.5/.138"	A Close (DIP B type) B With flange (DIP B type) C Close (THR B type) D With flange (THR B type)	THR type 0 Black 1 Natural color DIP type 0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 8 Grey 9 White	1 Right angle	Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy	G RoHS compliant (lead<4%) In copper Alloy	H RoHS compliant (lead<1000ppm) In copper Alloy	

NS	XX Number of contacts	X Pitch	0	X Color	X Body type	X	X	X	X	X
	Solid Block 01 1 contacts 02 2 contacts 03 3 contacts 04 4 contacts	0 5.75/.226"	0 Black(RAL 9005) 2 Red(RAL 3001/D) 3 Orange(RAL 2011/P) 4 Yellow(RAL 1018/A) 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7004/P) 9 White(RAL 1102) C Multiple colors	0 With hole 1 Without hole	0000 Standard	Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

NT	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.08) 12 12 contacts (pitch 10.16)	5 5.08/.20" 6 10.16/.40"	0 Black 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7035/D) 9 White C Green(RAL 6018/U)	0000 Standard	Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy			

NU	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 01 1 contacts 02 2 contacts 24 24 contacts	0 3.5/.138"	0 Black(RAL 9005) 2 Red(RAL 3001/D) 3 Orange(RAL 2011/P) 4 Yellow(RAL 1018/A) 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7004/P) 9 White(RAL 1102) C Multiple colors	0000 Standard	Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

NX	XX Number of contacts	X Pitch	0	X Color	0	X	X	X	X	X
	End Stackable 01 1 contacts 02 2 contacts 24 24 contacts	0 5.0/.197"	0 Black(RAL 9005) 2 Red(RAL 3001/D) 3 Orange(RAL 2011/P) 4 Yellow(RAL 1018/A) 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7004/P) 9 White(RAL 1102) C Multiple colors	0000 Standard	Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

NY	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Cover type				
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5) 12 12 contacts (pitch 7.0)	1 3.5/.138" 2 7.0/.276"	0 Black 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue 8 Grey(RAL 7004/P) 9 White C Multiple colors	0 Without cover 1 With cover	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

NZ	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type				
End Stackable 01 1 contacts (pitch 10.0&15.0) 02 2 contacts 03 3 contacts 12 12 contacts 08 8 contacts (pitch 15.0)	0 10.0/.393" 1 15.0/.591" 2 7.5/.295"	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 8 Grey 9 White C Multiple colors	A With jumper slot B Without jumper slot C Without jumper slot(Round hole) (Interlace tail type) D Without jumper slot(Round hole) (Parallel tail type) E Without jumper slot(Square hole) (Interlace tail type) F Without jumper slot(Square hole) (Parallel tail type)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

OL	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Pin length	Pin plating	Material of body				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5) 12 12 contacts (pitch 7.0)	1 3.5/.138" 2 7.0/.276"	0 L=16.5mm(Φ1.3)(DIM A=3.5mm)	0 Tin 1 Gold plating 10u" 2 Gold flash	0 DIP type 1 THR type	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

OP	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Pin length	Pin plating	Material of body				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81) 20 20 contacts (pitch 8.0) 12 12 contacts (pitch 7.0&7.62)	2 3.5/.138" 3 7.0/.276" 4 3.81/.15" 5 7.62/.30" 6 8.0/.315"	2 L=12.5mm(UpΦ1.3 DownΦ1.0)(DIMA=3.5) B L=10.0mm(Φ1.0)(DIMA=3.5) (only pitch 3.5 used for EH) 3 L=11.5mm(Φ1.3)(DIMA=1.9)	0 Tin 1 Gold plating 10u" 2 Gold flash	0 PA66 1 PA46	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

OQ (Body reverse)	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.08) 16 16 contacts (pitch 5.0&7.62) 12 12 contacts (pitch 3.5)	1 3.5/.138" 7 5.0/.197" 5 5.08/.20" 0 7.62/.30"	1 Close (pitch 7.62) 2 Close (pitch 3.5) 4 Close (pitch 5.08) 5 With flange (pitch 5.0&5.08)	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	A Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

OQ (SMT)	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts	1 3.5/.138" 3 3.81/.15"	5 With flange	0 Black	0 Vertical	D000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

OQ (2.54)	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts	C 2.54/.10"	THT type 1 Close SMT & THR type E Close	THT type 0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) SMT & THR type 0 Black 1 Natural color	THT & THR type 0 180° Au G/F plated 1 180° Bright -Tin plated 2 90° Au G/F plated 3 90° Bright -Tin plated SMD type A 180° Au G/F plated B 180° Bright -Tin plated C 90° Au G/F plated D 90° Bright -Tin plated	THT type 0000 "@" Logo (Standard) 000A "ANYTEK" Mark SMD & THR type B000 Tape reel "@" Logo (Standard) B00A Tape reel "ANYTEK" Mark Any special item by customer request, please contact sales department.	G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

PD	XX	X	0	X	0	X	X	X	X
	Number of contacts	Pitch		Color					
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts	0 5.0/.197" 2 7.5/.295"		0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

PF	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Pin Plating	Color	Pin Length				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	0 5.08/.20" 1 10.16/.40"	0 Tin Plated	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0 3.8mm	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

PS	XX	X	0	X	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts	1 3.5/.138?	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 7 Brown 8 Grey 9 White A~Z Any color other than green-and-yellow	0 W/O Flange 1 With Flange	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

T2	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Insulator type				
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/0.20" 3 10.16/0.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Stackable 1 Solid block	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

T3	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type				
02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	4 "+/-" Combination type W/Brass Stamping Clamp 5 "-" Slotted screw W/Brass Stamping Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	1 Stackable (180D wire inlet) 3 Stackable (90D wire inlet) 4 Solid block (180D wire inlet) 5 Solid block (90D wire inlet)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

T4	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0) 16 16 contacts (pitch 7.5)	0 5.0/.197" 1 10.0/.394" 2 7.5/.295"	4 "+/-" Combination type W/Brass Stamping Clamp 5 "-" Slotted screw W/Brass Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 4.4mm 1 3.0mm 2 4.4mm (Connector through type) 3 3.0mm (Connector through type)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

T5	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5) 12 12 contacts (pitch 7.0)	0 3.5/.138" 1 7.0/.276"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 3.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy			

T7	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X PCB mounting	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 16 16 contacts (pitch 6.35&7.62&9.52) 08 8 contacts (pitch 12.7&15.24&19.04)	0 6.35/.25" 1 12.7/.5" 2 9.52/.374" 3 19.04/.748" 4 7.62/0.3" 5 15.24/0.6"	2 "+/-" Combination type W/Brass Machined Clamp 3 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical(180D) 1 45D (only pitch 9.52&6.35)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

T7 New type	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X PCB mounting	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 16 16 contacts	4 7.62/0.3"	2 "+/-" Combination type W/Brass Machined Clamp 3 "-" Slotted screw W/Brass Machined Clamp 6 "+" Phillips screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	A Vertical(180D)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

T9	XX Number of contacts	X Pitch	X Screw&Terminal	X Color	0	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.08) 12 12 contacts (pitch 10.16)	2 5.08/.20" 3 10.16/.396"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	5 Green 8 Grey (RAL 7035/D)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

TA (5.0&5.08)	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" (2-lock) 1 10.0/.394" (2-lock) 4 5.08/.20" (1-lock) 5 10.16/.40" (1-lock)	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0 4.4mm 1 3.8mm 2 3.5mm 9 16.35mm 1 3.8mm 3 4.0mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

TA (7.5)	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 16 16 contacts (pitch 7.5) 08 8 contacts (pitch 15.0)	2 7.5/.295" 3 15.0/.950"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 4.4mm 1 3.8mm 2 3.5mm	0000 2 Interlock (Steel screw plating Cr ³⁺) BB00 1 Interlock (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

TB	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length			
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 4.4mm 1 3.8mm 2 3.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy		

TC	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length			
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40"	2 "+/-" Combination type W/Brass Machined Clamp 3 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 4.4mm 1 3.8mm 2 3.5mm 3 2.9mm (only pitch 5.0&10.0)	0000 2 Inter lock (Steel screw plating Cr ³⁺) A500 Solid block (Steel screw plating Cr ³⁺) (only pitch 5.0&10.0) C500 Hi temp (Steel screw plating Cr ³⁺) (only pitch 5.0&10.0) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy		

TD	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length			
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 4.4mm 1 3.8mm 2 3.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy		

TE/TF	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length			
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5) 12 12 contacts (pitch 7.0)	0 3.5/.138" 1 7.0/.276"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	Stackable 0 4.4mm 1 3.8mm 2 3.5mm Solid block (only TE) 3 4.4mm 4 3.8mm 5 3.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy		

TG	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length	Special insulator		
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 5 5.08/.20" 6 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 4.5mm 3 3.2mm	B Stackable (long-interlock) C Solid block (long-interlock) (only pitch 5.0)	000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

TH	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81&5.0) 12 12 contacts (pitch 7.0&7.62)	0 5.0/.197" 2 3.5/.138" 3 7.0/.276" 4 3.81/.15" 5 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Stackable type 1 Solid block type	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	Y ROHS compliant (lead<4%) In copper alloy G ROHS compliant (Low current) In copper alloy (lead<4%) In copper alloy (High current) H ROHS compliant (lead<1000ppm) In copper alloy				

TI	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 10.0) 08 8 contacts (pitch 15.0&15.24)	0 5.0/.197" 1 10.0/.394" 2 7.5/.295" 3 15.0/.591" 4 7.62/.30" 5 15.24/.60"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp 4 "+/-" Combination type W/Steel Stamping Clamp 5 "-" Slotted screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Stackable A Solid block	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

TJ (3.5/3.81)	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	1 3.5/.138" 3 3.81/.15"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp 2 "+/-" Combination type W/Zinc Alloy Clamp 3 "-" Slotted screw W/Zinc Alloy Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	2 With flange 3 W/O flange 4 W/O flange (with handle) 5 With flange (with handle)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy (Low current) H ROHS compliant (lead<1000ppm) In copper alloy				

TJ (5.0/5.08/7.5/7.62)	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 5.08 with latch)	7 5.0/.197" 5 5.08/.20" A 7.5/.295" 0 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp 2 "+/-" Combination type W/Zinc Alloy Clamp 3 "-" Slotted screw W/Zinc Alloy Clamp 4 "+/-" Combination type W/Steel Stamping Clamp (only pitch 5.08) 5 "-" Slotted screw W/Steel Stamping Clamp (only pitch 5.08)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange (only pitch 5.0/7.5/7.62) 2 With flange 3 W/O flange(only pitch 5.08) 4 W/O flange(with handle) (only pitch 5.0/5.08) 5 With flange(with handle) (only pitch 5.0/5.08) 6 W/O flange(contact on up side) (only pitch 5.0/5.08) 7 With flange(contact on up side) (only pitch 5.0/5.08) B With latch holer(only pitch 5.08)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	Y ROHS compliant (lead<4%) In copper alloy (Low current) G ROHS compliant (lead<4%) In copper alloy (High current) H ROHS compliant (lead<1000ppm) In copper alloy				

TM	XX Number of contacts	X Screw&Clamp	X Body color	X Fuse holder color	X Earth screw	X	X	X	X	X
Solid Block 03 3 contacts 04 4 contacts 05 5 contacts	0 "+/-" Combination type screw W/Brass Machined 1 "-" Slotted screw W/Brass Machined	8 Dark grey 9 White	0 Black	0 W/O Earth screw 1 W/Earth screw (M3*14) 2 W/Earth screw (M3*18)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

TN	XX Number of contacts	X Pitch	X Color	X Cover	X Close hole	X X X X X
Solid Block 03 3 contacts 06 6 contacts	1 4.57/.18" 2 4.5/.177"	0 Black 9 White (RAL 1102)	0 Without cover Vertical(90D wire inlet) 9 With cover Vertical(90D wire inlet) 1 Without cover Horizontal(180D wire inlet) 2 With cover Horizontal(180D wire inlet)	0 Without close hole 1 Close 2 hole 2 Close 3,4 hole 3 Close 2,4,5 hole 4 Close 2,4,5,6 hole 5 Close 2,4,6,8 hole 6 Close 2,4,7,9 hole (1~6 item only pitch 4.57mm)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

TO	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X X X X X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	1 Solid block type (Tail length 3.8mm) 2 Stackable type (Tail length 3.8mm)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

TR	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X PCB mounting	X X X X X
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.81&5.0) 16 16 contacts (pitch 7.5) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394" 2 7.5/.2952" 3 3.81/.15"	4 "+/-" Combination type W/Steel Stamping Clamp 5 "-" Slotted screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical (90D wire inlet) 1 Horizontal (180D wire inlet)	0000 Standard (Row spacing 7.62mm&5.0mm) (Steel screw plating Cr ³⁺) A000 Row spacing 10.0mm Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy

TS	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X X X X X
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81&5.0&5.08) 16 16 contacts (pitch 7.5&7.62)	1 3.5/.138" 3 3.81/.15" 5 5.08/.20" 7 5.0/.197" 0 7.62/.30" A 7.5/.295"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp 2 "+/-" Combination type W/Zinc Alloy Clamp 3 "-" Slotted screw W/Zinc Alloy Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	A Hook on entry side B Hook on back side C With flange & Hook on entry side D With flange & Hook on back side	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

TT	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X X X X X
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81&5.0) 12 12 contacts (pitch 7.0&7.62&10.0)	0 5.0/.197" 1 10.0/.394" 2 3.5/.138" 3 7.0/.276" 4 3.81/.15" 5 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) 9 White C Green (RAL 6018/U)	0 Stackable 1 Solid block (only pitch 5.0)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy

TU	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.08) 12 12 contacts (pitch 10.16)	2 5.08/0.20" 3 10.16/0.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

TV	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	1 3.5/.138" 3 3.81/.15" 5 5.0/.197"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

TW	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
Solid Block 01 1 contacts 02 2 contacts 03 3 contacts 12 12 contacts	1 10.0/.394"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0000 Standard @ Logo 000A Standard ANY Logo Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

TX	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color						
Solid Block 02 2 contacts 03 3 contacts 12 12 contacts (pitch 5.0) 06 6 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type screw W/Brass Machined Clamp(round hole) 1 "- Slotted screw W/Brass Machined Clamp(round hole) 2 "+/-" Combination type screw W/Zinc Alloy Clamp(square hole) 3 "- Slotted screw W/Zinc Alloy Clamp(square hole)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy					

TY	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Male pin					
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Two beam contact (with male Φ1.0) 1 Six finger contact (with male Φ1.0) 2 With flat jumper (two beam contact) 3 With round jumper (two beam contact)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

TZ	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&5.0) 12 12 contacts (pitch 7.0&10.0)	2 3.5/.138" 0 5.0/.197" 3 7.0/.276" 1 10.0/.394"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black	0 With pillar & W/O cover 1 With pillar & With cover (Tape reel) 2 W/O pillar & W/O cover (pitch 3.5&7.0) 3 W/O pillar & With cover (Tape reel) (pitch 3.5&7.0)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

V3	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Contact direction				
Solid Block 03 3 contacts	0 5.0/.197"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7004/P) C Green (RAL 6018/U)	0 Left 1 Right	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

V4	XX	0	X	X	0	X	X	X	X
	Number of contacts		Screw&Clamp	Color					
Solid Block 02 2 contacts 03 3 contacts 04 4 contacts 05 5 contacts		0 "+/-" Combination type screw W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7004/P) C Green (RAL 6018/U)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

V5	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Body type				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	3 3.81/.15" 5 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange (Bottom cover fixed type) 1 With flange (Bottom cover fixed type) 2 W/O flange (Dinrail holder A type) 3 With flange (Dinrail holder A type) 4 W/O flange (Dinrail holder B type) 5 With flange (Dinrail holder B type)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

V7	XX	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting				
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81&5.0&5.08) 16 16 contacts (pitch 7.5&7.62)	1 3.5/.138" 3 3.81/.15" 5 5.08/.20" 7 5.0/.197" A 7.5/.295" 0 7.62/.30"	1 W/O flange 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	Y ROHS compliant (lead<4%) In copper alloy G ROHS compliant (lead<1000ppm) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

V8		XX	X	X	X	X	X	X	X
		Number of contacts	Pitch	Screw&Clamp	Color	Body type			
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.81&5.08) 16 16 contacts (pitch 7.62) 18 18 contacts (pitch 3.81&5.08 Through the panel)		3 3.81/.15" 5 5.08/.20" 0 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 Flange with nut 2 Flange with screw 3 Through the panel 5 W/Flange nut & Through the panel & With latch (only pitch 5.08)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

V9		XX	X	X	X	X	X	X	X
		Number of contacts	Pitch	Screw&Clamp	Color	Body type			
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts		5 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange (Bottom cover fixed type) 1 With flange (Bottom cover fixed type) 2 W/O flange (Dinrail holder A type) 3 With flange (Dinrail holder A type) 4 W/O flange (Dinrail holder B type) 5 With flange (Dinrail holder B type)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

VA		XX	X	X	X	0	X	X	X
		Number of contacts	Pitch	Screw&Clamp	Color				
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0) 16 16 contacts (pitch 7.5) 08 8 contacts (pitch 15.0)		0 5.0/.197" 1 10.0/.394" 2 7.5/.295" 3 15.0/.950"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange (Bottom cover fixed type) 1 With flange (Bottom cover fixed type) 2 W/O flange (Dinrail holder A type) 3 With flange (Dinrail holder A type) 4 W/O flange (Dinrail holder B type) 5 With flange (Dinrail holder B type)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

VB		XX	X	X	X	X	X	X	X
		Number of contacts	Pitch	Screw&Clamp	Color	Body type			
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts		0 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 2 With flange	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

VC		XX	X	X	X	X	X	X	X
		Number of contacts	Pitch	Body type	Color	Tail type			
Solid Block 02 2 contacts 03 3 contacts 16 16 contacts		0 7.62/.30"	0 W/O flange 1 Flange with nut	0 Black 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Right angle(two tail type) 1 Vertical(two tail type) A Vertical(three tail type) B Right angle(three tail type) (PCB up) C Right angle(three tail type) (PCB down)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

VC	XX Number of contacts	X Pitch	X Body type	X Color	X Tail type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 16 16 contacts	0 7.62/.30"	2 With flange (only feed-through head with slip-on connection)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	1 Vertical	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VD	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	3 3.81/.15"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Without flange 2 With flange	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VE	XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.81) 12 12 contacts (pitch 7.62)	3 3.81/.15" 4 7.62/.30"	0 Open 1 Close 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VF	XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
	Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts 36 2*18 contacts (High type)	3 3.81/.15" 5 5.08/.20" 7 5.0/.197"	0 Open (only pitch 5.0&5.08) 1 Close 2 With flange 3 Close (High type) 4 With flange (High type)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VH	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.08) 12 12 contacts (pitch 10.16)	5 5.08/.20" 6 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 2 With flange	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VI/VJ	XX Number of contacts					X Pitch	X Screw&Clamp	X Color	X Wire entry	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0&5.08) 16 16 contacts (pitch 7.5&7.62) 12 12 contacts (pitch 10.0&10.16) 08 8 contacts (pitch 15.0&15.24)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40" 4 7.5/.295" 5 15.0/.591" 6 7.62/.30" (only VJ) 7 15.24/.60" (only VJ)	0 "+/-" Combination type W/Brass Machined Clamp 1 "- Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 90D wire inlet(Vertical) 1 180D wire inlet(with cover) (Horizontal) 2 180D wire inlet(without cover) (Horizontal) 3 90D wire inlet(Vertical)- Solid block 4 180D wire inlet(with cover) (Horizontal)-Solid block 5 180D wire inlet(without cover) (Horizontal)-Solid block	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy							

VJ	XX Number of contacts		X Pitch	0	X Color	5	T	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 16 16 contacts	6 7.62/.30"	0 Black(RAL 9005) 2 Red(RAL 3001/D) 3 Orange(RAL 2011/P) 4 Yellow(RAL 1018/A) 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7035/D) C Green(RAL 6018/U)	T000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy						

VK	XX Number of contacts		X Pitch	X Body type	X Color	0	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	1 3.5/.138" 3 3.81/.15" 5 5.08/.20" 7 5.0/.197"	0 Open(only pitch 5.0/5.08) 1 Close 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

VL	XX Number of contacts		X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X
	Solid Block 04 2*2 contacts 06 2*3 contacts 24 2*12 contacts 48 2*24 contacts (pitch 2.5&3.5& 3.81&5.0&5.08) 24 2*12 contacts (pitch 7.0&7.62& 10.0&10.16)	1 3.5/.138" 2 7.0/.275" 3 3.81/.15" 4 7.62/.30" 5 5.08/.20" 6 10.16/.40" 7 5.0/.197" 8 10.0/.394" B 2.5/.098"	1 Close 2 With flange 3 Close(B type) (only pitch 3.5) 4 W/F(B type) (only pitch 3.5) 1 Close (only pitch 2.5)	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

VM	XX Number of contacts		X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81& 5.0&5.08) 16 16 contacts (pitch 7.5&7.62)	1 3.5/.138" 3 3.81/.15" 5 5.08/.20" 7 5.0/.197" A 7.5/.295" 0 7.62/.30"	4 "+/-" Combination type W/Steel Stamping Clamp 5 "- Slotted screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Without flange (only pitch 3.5/3.81/5.0/5.08) 1 Without flange(Low profile) (only pitch 5.08/7.5/7.62) 2 With flange (only pitch 3.5/3.81/5.0/5.08) 3 With flange(Low profile) (only pitch 5.08/7.5/7.62)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	Y ROHS compliant (lead<4%) In copper alloy (Low current) G ROHS compliant (lead<4%) In copper alloy (High current) H ROHS compliant (lead<1000ppm) In copper alloy			

VN	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	A 2.54mm/.1"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VO	XX Number of contacts	X Pitch	X Body type	X Color	X PCB mounting	X	X	X	X	X
	Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts	1 3.5/.138" 3 3.81/.15"	1 Close 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VP	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail type	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts 12 12 contacts (pitch 10.16&12.7)	6 10.16/.400" 8 12.7/.500"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp 4 "+/-" Combination type W/Steel Stamping Clamp 5 "- " Slotted screw W/Steel Stamping Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	4 Single tail (solder pin size: 1.0*1.0) 5 Double parallel tail (solder pitch 5.08, solder pin size: 1.2*1.2) 7 Double interlace tail (solder pitch 4.0, solder pin size: 1.0*0.9) 8 Double parallel tail (solder pitch 4.0, solder pin size: 1.0*0.9)	0000 Standard A000 Monolithic contact (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VQ	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Contact type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5&3.81) 12 12 contacts (pitch 7.0&7.62)	1 3.5/.138" 2 7.0/.276" 3 3.81/.15" 4 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Dip solder 1 Press fit 2 Dip solder (W/O cover) 3 Press fit (W/O cover)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VR	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "- " Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange (contact on down side) 1 W/O flange (contact on up side) 2 With flange (contact on down side) 3 With flange (contact on up side)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

VS	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting			
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	5 5.08/.20"	1 Close 2 With flange	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Vertical 1 Right angle	0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

VT	XX	X	X	X	0	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color				
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 12 12 contacts	2 5.08/.20"	1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

VV	XX	X	X	X	0	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color				
End Stackable 04 2*2 contacts 06 2*3 contacts 32 2*16 contacts (pitch 6.35&9.52) 16 2*8 contacts (pitch 12.7&19.04)	0 6.35/.25" 1 12.7/.5" 2 9.52/.375" 3 19.04/.75"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

VW	XX	X	0	X	X	X	X	X
	Number of contacts	Pitch		Color	Body type			
Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts	1 3.5/.138"	0 Black 3 Orange (RAL 2011/P) 5 Green (RAL 6018/T) 6 Blue (RAL 5015/A) 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 W/O flange 1 W/flange	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

VX	XX	X	X	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color	PCB mounting			
Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 3.5) 24 2*12 contacts (pitch 7.0)	1 3.5/.138" 2 7.0/.276"	0 Open 1 Close 2 With flange	THR type 0 Black DIP type 0 Black 6 Blue 2 Red 8 Grey 3 Orange 9 White 4 Yellow C Green 5 Green (RAL 6018/U)	THR type A Vertical B Right angle DIP type 0 Vertical 1 Right angle	0000 Standard B000 THR tape reel Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy		

VY	XX X X X X					X X X X X				
	Number of contacts	Pitch	Screw&Terminal	Color	Body type					
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 5.0/.197" 1 10.0/.394"	0 "+/." Combination type W/Brass Machined Clamp 1 "-." Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 Polyamide 4.8mm 1 Polyamide 3.8mm C Hi-Temperature 4.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy				

VZ	XX X 0 X 0					X X X X X				
	Number of contacts	Pitch		Color						
Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	3 3.81/.15" 5 5.08/.20"		0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy				

WQ	0015 XX X X				X X		X
	Number of contacts	Color	Pitch				
01 1 contacts 02 2 contacts 24 24 contacts (pitch 5.0) 12 12 contacts (pitch 10.0)	0 Black(RAL 9005) 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue 8 Grey 9 White C Green	0 5.0mm 1 10.0mm		Two alphanumeric digits Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy		

WS	002 XX X		X X X X X		
	Number of poles	Body Color			
52 52 poles	0 Black(RAL 9005) 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue 8 Grey 9 White C Multiple colors		Customized 0010 0020 0030	G RoHS compliant (lead<4%) In copper Alloy	

XA	XX X X X 0					X X X X X				
	Number of contacts	Pitch	PCB mounting	Color						
End Stackable 01 1 contacts 02 2 contacts 03 3 contacts 12 12 contacts	1 6.35/.25" 2 8.60/.338"	0 Vertical 90D wire inlet 1 Right angle 180D wire inlet (only pitch 6.35)	0 Black 2 Red 3 Orange 4 Yellow 5 Green(RAL 6018/T) 6 Blue(RAL 5015/A) 8 Grey(RAL 7004/P) 9 White C Multiple colors	0 Solder pins staggered by half pin spacing	0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy				

XC	XX	X	X	X	0	X	X	X	X	X
	Number of contacts	Pitch	Body type	Color						
04 4 contacts	1 3.5/.138"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 1 Natural color 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 7 Brown 8 Grey 9 White A~Z any color other than green and yellow			0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

XD	XX	X	0	X	0	X	X	X	X	X
	Number of contacts	Pitch		Color						
Solid Block 02 2 contacts 03 3 contacts 04 4 contacts 24 24 contacts (pitch 5.0)	7 5.0/.197"		0 Black 2 Red 3 Orange 4 Yellow 5 Green 6 Blue 8 Grey 9 White C Multiple colors			0000 Standard Any special item by customer request, please contact sales department.	F RoHS compliant (lead<100ppm) In copper Alloy G RoHS compliant (lead<4%) In copper Alloy H RoHS compliant (lead<1000ppm) In copper Alloy			

YA	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length					
End Stackable 06 3*2 contacts 09 3*3 contacts 72 3*24 contacts Solid Block type only 15 3*5 poles contacts (only pitch 3.81)	0 3.5/.138" 2 3.81/.15"	0 "+/-" Combination type screw W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 3.5mm (only 15pole solid block) 1 3.5mm (stackable)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

YB	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length					
End Stackable 06 3*2 contacts 09 3*3 contacts 72 3*24 contacts (pitch 5.08) 36 3*12 contacts (pitch 10.16)	2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 3.5mm		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

YC	XX	X	X	X	X	X	X	X	X	X
	Number of contacts	Pitch	Screw&Clamp	Color	Tail length					
End Stackable 02 2 contacts 03 3 contacts 24 24 contacts (pitch 5.08) 12 12 contacts (pitch 10.16)	2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 2 Red 3 Orange 4 Yellow 5 Green (RAL 6018/T) 6 Blue 8 Grey 9 White C Green (RAL 6018/U)	0 3.5mm		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy			

YD/YE/YF	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X	X	X	X	X
	End Stackable 02 2 contacts 03 3 contacts ... 24 24 contacts (pitch 5.0&5.08) 12 12 contacts (pitch 10.0&10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/0.20" 3 10.16/0.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	YD 0 3.8mm 1 3.5mm YE/YF 0 3.5mm 1 3.5mm-Solid block (only YE)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YG	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts ... 24 24 contacts	0 5.0/.197" 2 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	1 W/O cover	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YH	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	End Stackable 06 3*2 contacts 09 3*3 contacts ... 72 3*24 contacts (pitch 5.0/5.08) 36 3*12 contacts (pitch 10.0/10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	1 W/O cover	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YI	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	End Stackable 08 4*2 contacts 12 4*3 contacts ... 96 4*24 contacts	0 5.0/.197" 2 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	1 W/O cover	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YJ	100 Series No.	03 Number of contacts	X Current rating&Contact	X Screw type	X Body logo	X	X	X
			1 Current rating 74A with brass terminal 2 Current rating 114A with copper terminal 3 Current rating 140A with copper terminal	0 Screw M5 (only 74A) 1 Screw M6 (only 114A&140A)	0 @ mark A ANY mark	00 Standard Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy

YJ	114 Series No.	02 Number of contacts	0	X	X	X	X	X
	0000 Standard Any special item by customer request, please contact sales department. G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy							

YK	XX Series No.	X Changable code	XX Number of contacts	X Cover&Flange	X Screw&Contacts plating	X Body logo	X	X	X
	21 Series 22 Series 32 Series 33 Series 42 Series 44 Series 55 Series 88 Series	1 2 3 4 5 ... A (only YK44A) B (only YK44B)	02 03 04 ... 12 ... 20 ... 30	0 W/O flange & W/O cover 2 W/O flange & With cover (only YK44B) 3 With flange & W/O cover (only YK443)	0 Screw & Contacts plating G/F 1 Screw plating Zinc & Contacts plating G/F 2 Screw plating G/F & Contacts plating Sn 3 Screw plating Zinc & Contacts plating Sn (standard)	0 "@" logo (standard) 1 "ANYTEK" logo	Customer's special requirements "01~99" 00 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

YK	XX Series No.	X Changable code	XX Number of contacts	X Cover&Flange	X Screw&Contacts plating	X Body logo	X	X	X
	31 Series 41 Series 51 Series 61 Series	1 2 3 4 5 ...	02 03 04 ... 20 ... 30	0 W/O flange & W/O cover 3 With flange & W/O cover	0 Screw & Contacts plating G/F 1 Screw plating Zinc & Contacts plating G/F 2 Screw plating G/F & Contacts plating Sn 3 Screw plating Zinc & Contacts plating Sn (standard)	0 "@" logo (standard) 1 "ANYTEK" logo	Customer's special requirements "01~99" 00 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

YK	XX Series No.	X Changable code	XX Number of contacts	X Cover&Flange	X Screw&Contacts plating	X Body logo	X	X	X
	11 Series 66 Series 77 Series	1 2 3 4 E 1	02 03 ... 30 04 2*2 2*3 ... 2*15 ... 2*21	3 With flange & W/O cover 0 W/O flange & W/O cover 1 With flange & With cover 3 With flange & W/O cover	0 Screw & Contacts plating G/F 1 Screw plating Zinc & Contacts plating G/F 2 Screw plating G/F & Contacts plating Sn 3 Screw plating Zinc & Contacts plating Sn (standard)	0 "@" logo (standard) 1 "ANYTEK" logo	Customer's special requirements "01~99" 00 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

YK	XX Series No.	X Changable code	XX Number of contacts	X Cover&Flange	X Screw&Contacts plating	X Body logo	X	X	X
	30 Series 40 Series 50 Series 60 Series 70 Series 90 Series	1 2 3 4 5 ... A (YK50A&70A) B (only YK50B)	02 03 04 ... 10 11 12 ... 20 ... 30	0 W/O flange & W/O cover 1 With flange & With cover 2 W/O flange & With cover 3 With flange & W/O cover 0 W/O flange & W/O cover (only YK50A&YK70A) 2 W/O flange & With cover	0 Screw & Contacts plating G/F 1 Screw plating Zinc & Contacts plating G/F 2 Screw plating G/F & Contacts plating Sn 3 Screw plating Zinc & Contacts plating Sn (standard)	0 "@" logo (standard) 1 "ANYTEK" logo	Customer's special requirements "01~99" 00 Standard	G ROHS compliant (lead<4%) In copper alloy H ROHS compliant (lead<1000ppm) In copper alloy	

YK991	XX Number of contacts	X Cover&Flange	X Screw&Contacts plating	X Body logo	X	X	X
	04 2*2 contacts 06 2*3 contacts 40 2*20 contacts	1 With flange & With cover 3 With flange & W/O cover	0 Screw & Contacts plating G/F 1 Screw plating Zinc & Contacts plating G/F 2 Screw plating G/F & Contacts plating Sn 3 Screw plating Zinc & Contacts plating Sn 4 Screw & Contacts plating Nickel 5 Screw steel plating zinc-nickel alloy & Contacts plating Nickel 6 Screw stainless steel & Contacts plating Nickel	0 "@" logo (standard) 1 "ANYTEK" logo	Customer's special requirements "01~99" 00 Standard	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy

YL	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Body type	X	X	X	X	X
	End Stackable 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 5.0&5.08) 24 2*12 contacts (pitch 10.0&10.16)	0 5.0/.197"(left) 1 10.0/.394"(left) 2 5.0/.197"(right) 3 10.0/.394"(right) 4 5.08/0.20"(left) 5 10.16/0.40"(left) 6 5.08/0.20"(right) 7 10.16/0.40"(right)	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 Stackable 1 Solid block (only pitch 5.08-R)	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YM	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X	X	X	X	X
	End Stackable 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 5.0&5.08) 24 2*12 contacts (pitch 10.0&10.16)	0 5.0/.197"(left) 1 10.0/.394"(left) 2 5.0/.197"(right) 3 10.0/.394"(right) 4 5.08/0.20"(left) 5 10.16/0.40"(left) 6 5.08/0.20"(right) 7 10.16/0.40"(right)	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 3.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YN	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X	X	X	X	X
	End Stackable 06 3*2 contacts 09 3*3 contacts 72 3*24 contacts (pitch 5.0/5.08) 36 3*12 contacts (pitch 10.0/10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)	0 3.5mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YO	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5/3.81) 12 12 contacts (pitch 7.0/7.62)	0 3.5/.138" 1 7.0/.275" 2 3.81/.15" 3 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 3.7mm	0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YP	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X Special insulator	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts (pitch 3.5/3.81) 12 12 contacts (pitch 7.0/7.62)	0 3.5/.138" 1 7.0/.275" 2 3.81/.15" 3 7.62/.30"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 3.7mm	0 Standard A High type (only pitch 3.81/7.62)	000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy	

YQ	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	X Tail length	X Special insulator	X	X	X	X
	Solid Block 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 3.5/3.81) 24 2*12 contacts (pitch 7.0/7.62)	0 3.5/.138"(left) 1 7.0/.275"(left) 2 3.5/.138"(right) 3 7.0/.275"(right) 4 3.81/.15"(left) 5 7.62/.30"(left) 6 3.81/.15"(right) 7 7.62/.30"(right)	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D)	0 3.7mm	0 Standard A High type (only pitch 3.81/7.62)	000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy	

YR	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
	Solid Block 02 2 contacts 03 3 contacts 24 24 contacts	0 5.0/.197" 2 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YS	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
	End Stackable 04 2*2 contacts 06 2*3 contacts 48 2*24 contacts (pitch 5.0/5.08) 24 2*12 contacts (pitch 10.0/10.16)	0 5.0/.197" 1 10.0/.394" 2 5.08/.20" 3 10.16/.40"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

YT	XX Number of contacts	X Pitch	X Screw&Clamp	X Color	0	X	X	X	X	X
	End Stackable 08 4*2 contacts 12 4*3 contacts 96 4*24 contacts	0 5.0/.197" 2 5.08/.20"	0 "+/-" Combination type W/Brass Machined Clamp 1 "-" Slotted screw W/Brass Machined Clamp	0 Black 5 Green (RAL 6018/T) 6 Blue 8 Grey (RAL 7035/D) C Green (RAL 6018/U)		0000 Standard (Steel screw plating Cr ³⁺) Any special item by customer request, please contact sales department.	G ROHS compliant (lead<4%) In copper alloy	H ROHS compliant (lead<1000ppm) In copper alloy		

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE
Wire Protector System			
TA 1-lock 5.0		AK 100/...DS-5,0-V	
TA 1-lock 5.08		AKZ 120/...DS-5.08-V	
TA 1-lock 7.5		AK 110/...DS-7.5-V	
VA 1-lock 5.0		AK 104/...DS-5,0-V	
VA 1-lock 7.5		AK 114/...DS-7,5-V	
TB 2-lock 5.0		AK 100/...DS-5,0-H	
TB 1-lock 5.08		AKZ 120/...DS-5,08-H	
TC 1-lock 5.0		AK(Z) 500/...DS-5,0-V	ED500V
TC 2-lock 5.0		AK 500/...DS-5,0-V	
TC 2-lock 5.08		AK(Z) 500/...DS-5,08-V	ED508V
TD 2-lock 5.0		AK(Z) 500/...DS-5,0-H	ED500R
TE 3.5		AK(Z) 550/...DS-3.5-V	
TF 3.5		AK(Z) 550/...DS-3.5-H	
T5 3.5 Solid Block			ED350V
T3 2-lock180D			DT-126VP
T3 90D			DT-126RP
T4 5.0			166
T4 7.50			166-..P3
TR 5.0 180D	FRONT 2,5-H/SA 5-EX..	AK 2200/...-5,0-H	DT-123RA
TR 5.0 90D	FRONT 2,5-V/SA 5 EX..	AK 2200/...-5,0-V	
TR 7.5 180D		AK 2200/...-7,5-H	DT-123RA-..P3
TR 7.5 90D		AK 2200/...-7,5-V	
TR 10.0 180D		AK 2200/...-10,0-H	
TR 10.0 90D		AK 2200/...-10,0-V	
KH6.35	FRONT4...-6.35		
KH7.62	FRONT4...-7.62		
VY 5.0 HI-Temp		AK 590/...DS-5,0	
VY 5.0 NL66		AK 590/...DS-5,0	
KY 5.0 180D	PT 1.5/...-5.0-H		
KY 5.0 90D	PT 1.5/...-5.0-V		
KZ 3.5 45D	PTA 1.5/...-3.5		
KZ 5.0 45D	PTA 1.5/...-5.0		
Rising Clamp System			
T2 5.0 45D	SMKDSP 1.5/..		EK500A
T2 5.0 -solid block	SMKDSP 1.5/..		EK500A
T2 5.08 -solid block	SMKDSP 1.5/...-5,08		EK508A
TI 5.0			DT-128V-
TI 7.5			DT-128V-..P3
VI 5.0 180D	MKDS 1,5/..	AK(Z) 350/...-5,0-V	
VI 5.0 90D		AK (Z)350/...-5,0-H	
VI 5.08 180D	MKDS 1,5/...-5,08	AK(Z) 350/...-5,08-V	
VI 5.08 90D		AK(Z) 350/...-5,08-H	
VI 7.5 180D	GMKDS 1,5/..	AK 360/...-7,5-V	
VI 7.5 90D		AK 360/...-7,5-H	
TO 5.0	MKDSN 1,5/..		
ED-3.81		AK(Z)602/...3.81-V	
YC 5.08	MKDSN 1,5/...-5,08	AK(Z) 250/...-5,08-V	ELK508V-..P
YD 5.0	MKDSP 1,5/..		EK500V
YD 5.08	MKDSP 1,5/...-5,08		EK508V
VJ 5.0 180D	MKDS 3/..	AK(Z) 700/...-5,0-V	
VJ 5.0 90D		AK (Z)700/...-5,0-H	
VJ 5.08 180D	MKDS 3/...-5,08	AK(Z)700/...-5,08-V	
VJ 5.08 90D		AK(Z) 700/...-5,08-H	
VJ 7.5 180D		AK(Z)710/...-7,5-V	
VJ 7.5 90D		AK(Z)710/...-7,5-H	
VJ 7.62 180D	GMKDS 3/..	AK(Z) 710/...-7,62-V	
VJ 7.62 90D		AK(Z)710/...-7,62-H	
YE 5.0			EEK500V
YE 5.08			EEK508V

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE
YL- L(YD+YE) 5.0			EK500V4R
YL- R(YD+YE) 5.0	MKKDS 1,5/..	AK 370/...-5,0-V	EK500V4L
YL- L(YD+YE) 5.08			EK508V4R
YL- R(YD+YE) 5.08	MKKDS 1,5/...-5,08		EK508V4L
YB-5.08(Solid block)	MK3DSN1.5		
YO 3.5	MKDS 1/...-3,5		EK350V
YO 3.81	MKDS 1/...-3,81		EK381V
YP 3.5			EEK350V
YP 3.81			EEK381V
YQ- L(YO+YP) 3.5	MKKDS 1/...-3,5		EK350V4R
YQ -R(YO+YP) 3.5	MKKDS 1/...-3,5		EK350V4L
YQ- L(YO+YP) 3.81	MKKDS 1/...-3,81		EK381V4R
YQ- R(YO+YP) 3.81	MKKDS 1/...-3,81		EK381V4L
YA Triple (S-block) 3.81	MK3DS 1		EK371V3L
YA3.81(Stackable)	MK3DS1		
YF 5.0			E3K500V
YF 5.08			E3K508V
YM- L(YE+YF) 5.0			EK500V2R
YM- R(YE+YF) 5.0			EK500V2L
YM- L(YE+YF) 5.08			EK508V2R
YM- R(YE+YF) 5.08			EK508V2L
YN Triple 5.0			EK500V3L
YN Triple 5.08			EK508V3L
YH 5.0/5.08	MK3DS 3/...5.08	AKZ770/...-5,08-V	EHK508V3L
YT 5.0/5.08	MK4DS1.5		
YI 5.0/5.08			
VV 6.35	MKKDS 5/...-6,35		
VV 9.52	MKKDS 5/...-9,5		
YS 5.0	MKKDSN 1.5/		
YS 5.08	MKKDSN 1.5/...-5,08		EELK508V-..P
VQ 3.5 DIP SOLDER		AKZ 602/...-3,5-V	
VQ 3.81 DIP SOLDER		AKZ 602/...-3,81-V	
TV 3.5 45D	SMKDS 1/...-3,5		EK350A
TV 3.81 45D	SMKDS 1/...-3,81		EK381A
KP 6.35	MKDS 5HV/...-ZB-6.35		
KP 10.16(Double interlace)	MKDS 10HV/...-ZB-10.16		
KP 10.16(Front single row)	MKDS 10HV/...-B-10.16		
KP 10.16(Back single row)	MKDS 10HV/...-F-10.16		
T7 6.35	MKDS 5/...-6,35		ESK635V
T7 6.35 45D	SMKDS 5/...-6.35		
T7 7.62	MKDS 5/...-7,62		ESK762V
KO 9.52(Back single row)	MKDS 5HV/...-9.52		
KO 9.52(Interlace tail)	MKDS 5HV/...-9.52-Z		
T7 9.52 180D	MKDS 5/...-9,5		ESK950V
T7 9.52 45D	SMKDS 5/...-9,5		
KQ 10.16	MKDSP10HV...-10.16		ESK116V
VP 10.16(Single tail)	MKDSP10HV...-10.16		ESK116V
VP 12.7	MKDSP10HV...-12.7		
EI 15.00	MKDSP 25/...-15		
EI 15.00 W/F	MKDSP 25/...-15-F		
EK 5.08	MKDS 3/...-5,08		EHK508V
VN 2.54	MPT 0,5/...-2,54		EK254V
VT 5.08	KDS 3-MT		
V4 Solid Block	G 10/...		
E4 Solid Block	G 5/...		
ES 5.0	MKDSFW1.5		
EB 5.0 Interlace	MKKDS3/..	AK(Z)750/...-5.0-V	
EB 5.08 Interlace	MKKDS3/...-5.08	AK(Z)750/...-5.08-V	EEHK508V
EB 5.0 Parallel	MKKDSG 3/..	AK790/...-5.0-V	
EB 5.08 Parallel	MKKDSG 3/...-5.08	AK790/...-5.08-V	

K

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE
ES 5.0	MKDSFW1,5/..		
TI 7.62	GMKDS1,5/...-7,62		
TG 5.0 45D		AK (Z)300/...-5,0	
TG 5.08 45D		AK(Z) 300/...-5,08	
TV 5.0 45D	SMKDSN 1,5/..		
E6 5.0 RIGHT	MKDSO 2,5/...-L		
E6 5.0 LEFT	MKDSO 2,5/...-R		
K7 7.5 RIGHT	MKDSO 2,5 HV/ 3R-7,5 KMGY		
K7 7.5 LEFT	MKDSO 2,5 HV/ 3L-7,5 KMGY		
Screw Pluggable System			
TH 5.0		AK 130/...-5,0	ED130
TH 5.0Solid Block		AK(Z) 130/...-5,0	
EH 3.5		AK 1300/...-3,5	
OP/(EH) 3.5		STL 1300/...-3,5-V	
OP 12.5 5.0		STL 130/...-5,0-V	EDH130
OP 5.0 Bend pin		STL 1340/...-5,0-H	
TJ 3.5	MC 1,5/...-ST-3,5	AK 1550/...-3,5	EC350V
TJ 3.5 W/F	MC 1,5/...-STF-3,5	AK 1550/..F-3,5	EC350VM
TJ 3.81	MC 1,5/...-ST-3,81	AKZ 1550/...-3,81	EC381V
TJ 3.81 W/F	MC 1,5/...-STF-3,81	AKZ 1550/..F-3,81	EC381VM
TJ 5.0	MSTB 2,5/...-ST	AK 950/...-5,0	5ESDV
TJ 5.0 W/F	MSTB 2,5/...-ST	AK 950/...-F-5,0	5ESDVM
TJ 5.08	MSTB 2,5/...-ST-5,08	AKZ 950/...-5,08	2ESDV
TJ 5.08 W/F	MSTB 2,5/...-STF-5,08	AKZ 950/...-F-5,08	2ESDVM
TJ 7.5	GMSTB 2,5/...-ST		7ESDV
TJ 7.5 W/F	GMSTB 2,5/...-STF		7ESDVM
TJ 7.62	GMSTB 2,5/...-ST-7,62	AKZ 960/...-7,62	3ESDV
TJ 7.62 W/F	GMSTB 2,5/...-STF-7,62	AKZ 960/...-F-7,62	3ESDVM
TJ 5.0 Contact on up side	MSTBT2,5/...-ST		5ESDT
TJ 5.0 Contact on up side(W/F)	MSTBT2,5/...-STF		
TJ 5.08 Contact on up side	MSTBT2,5/...-ST-5.08		
TJ 5.08 Contact on up side(W/F)	MSTBT2,5/...-STF-5.08		
TJ 3.5/3.81 with handle		AK(Z)1550	
TJ 5.0 with handle	MSTB2,5/...-STZ	AK(Z)950	
TJ5.08 with handle	MSTB2,5/...-STZ-5.08	AK(Z)950	
VR 5.08(contact down side)	MC 1,5/...-STI-5.08		
VR 5.08 W/F(contact down side)	MC 1,5/...-STIF-5.08		
VR 5.08(contact up side)	MC 1,5/...-ST-5.08		
VR 5.08 W/F(contact up side)	MC1,5/...-STF-5.08		
VS 5.08 180D	MCV 1,5/...-G-5.08		
VS 5.08 W/F 180D	MCV 1,5/...-GF-5.08		
VS 5.08 90D	MC 1,5/...-G-5.08		
VS 5.08 W/F 90D	MC 1,5/...-GF-5.08		
VH 5.08	TMSTBP 2,5/...-ST-5,08		
VH 5.08 W/F	TMSTBP 2,5/...-STF-5,08		
OQ 2.5 180D	MCV 0,5/...-G-2.5		ECH250V
OQ 2.5 90D	MC 0,5/...-G-2.5		ECH250R
OQ 3.5 180D	MCV 1,5/...-G-3.5	STL 1550/..G-3,5-V	ECH350V
OQ 3.5 180D (W/F)	MCV 1,5/...-GF-3.5	STL 1550/..F-3,5-V	ECH350VM
OQ 3.5 90D	MC 1,5/...-G-3.5	STL 1550/..G-3,5-H	ECH350R
OQ 3.5 90D (W/F)	MC 1,5/...-GF-3.5	STL 1550/..F-3,5-H	ECH350RM
OQ 3.81 180D	MCV 1,5/...-G-3.81	STLZ 1550/..G-3,81-V	ECH381V
OQ 3.81 180D (W/F)	MCV 1,5/...-GF-3.81	STLZ 1550/..F-3,81-V	ECH381VM
OQ 3.81 90D	MC 1,5/...-G-3.81	STLZ 1550/..G-3,81-H	ECH381R
OQ 3.81 90D (W/F)	MC 1,5/...-GF-3.81	STLZ 1550/..F-3,81-H	ECH381RM
OQ 5.0 180D (Open)	MSTBV 2,5/...-G	STL 950/...-5,0-V	5EHDV
OQ 5.0 180D (Close)	MSTBVA 2,5/...-G	STL 950/...-G-5,0-V	5EHDVC
OQ 5.0 180D (W/F)	MSTBV 2,5/...-GF	STL 950/...-F-5,0-V	5EHDVM
OQ 5.0 90D (Open)	MSTB 2,5/...-G	STL 950/...-5,0-H	5EHDR
OQ 5.0 90D (Close)	MSTBA 2,5/...-G	STL 950/...-G-5,0-H	5EHDRC

K

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE
OQ 5.0 90D (W/F)	MSTB 2,5/...-GF	STL 950/...-F-5,0-H	5EHD RM
OQ 5.0 90D (With latch)	MSTBA 2,5/...-G-5,0-RN		
OQ 5.0 180D (With latch)	MSTBVA 2,5/...-G-5,0-RN		
OQ 5.08 180D (Open)	MSTBV 2,5/...-G-5,08	STLZ 950/...-5,08-V	2EHDV
OQ 5.08 180D (Close)	MSTBVA 2,5/...-G-5,08	STLZ 950/...-G-5,08-V	2EHDVC
OQ 5.08 180D (W/F)	MSTBV 2,5/...-GF-5,08	STLZ 950/...-F-5,08-V	2EHDVM
OQ 5.08 90D (Open)	MSTB 2,5/...-G-5,08	STLZ 950/...-5,08-H	2EHDR
OQ 5.08 90D (Close)	MSTBA 2,5/...-G-5,08	STLZ 950/...-G-5,08-H	2EHDRC
OQ 5.08 90D (W/F)	MSTB 2,5/...-GF-5,08	STLZ 950/...-F-5,08-H	2EHD RM
OQ 5.08 90D (With latch)	MSTBA 2,5/...-G-5,08-RN		
OQ 5.08 180D (With latch)	MSTBVA 2,5/...-G-5,08-RN		
OQ 7.5 180D (Open)	GMSTBV 2,5/...-G		7EHDV
OQ 7.5 180D (Close)	GMSTBVA 2,5/...-G		7EHDVC
OQ 7.5 180D (W/F)	GMSTBV 2,5/...-GF		7EHDVM
OQ 7.5 90D (Open)	GMSTB 2,5/...-G		7EHDR
OQ 7.5 90D (Close)	GMSTBA 2,5/...-G		7EHDRC
OQ 7.5 90D (W/F)	GMSTB 2,5/...-GF		7EHD RM
OQ 7.62 180D (Open)	GMSTBV 2,5/...-G-7,62	STLZ 960/...-7.62-V	3EHDV
OQ 7.62 180D (Close)	GMSTBVA 2,5/...-G-7,62	STLZ 960/...-G-7.62-V	3EHDVC
OQ 7.62 180D (W/F)	GMSTBV 2,5/...-GF-7,62		3EHDVM
OQ 7.62 90D (Open)	GMSTB 2,5/...-G-7,62	STLZ 960/...-7.62-H	3EHDR
OQ 7.62 90D (Close)	GMSTBA 2,5/...-G-7,62	STLZ 960/...-G-7.62-H	3EHDRC
OQ 7.62 90D (W/F)	GMSTB 2,5/...-GF-7,62		3EHD RM
VK 3.5 45D	SMC 1,5/...-G-3,5		
VK 3.5 45D (W/F)	SMC 1,5/...-GF-3,5		
VK 3.81 45D	SMC 1,5/...-G-3,81	STLZ 1590/...G-3,81	
VK 3.81 45D (W/F)	SMC 1,5/...-GF-3,81	STLZ 1590/...F-3,81	
VK 5.0 45D (Open)	SMSTB 2,5/...-G		
VK 5.0 45D (Close)	SMSTBA 2,5/...-G		
VK 5.0 45D (W/F)	SMSTB 2,5/...-GF		
VK 5.08 45D (Close)	SMSTB 2,5/...-G-5,08	STLZ 990/...G-5,08	
VK 5.08 45D (W/F)	SMSTBA 2,5/...-G-5,08		
VK 5.08 45D (Open)	SMSTB 2,5/...-GF-5,08		
VB 7.62	PC 4/...-ST-7,62		
VB 7.62 (W/F)	PC 4/...-STF-7,62		
VC 7.62 90D A TYPE	PC 4/...-G-7,62		ECH762R
VC 7.62 90D(W/F) A TYPE			ECH762RM
VC 7.62 180D A TYPE	PCV 4/...-G-7,62		ECH762V
VC 7.62 180D(W/F) A TYPE			ECH762VM
VC 7.62 Feed-through header with silp	DFK-PC4/...-G-7.62-FS4,8		
ET-7.62	PC 5/...-ST-7,62		EC762V
ET-7.62 (W/F)	PC 5/...-STF-7,62		EC762VM
ET 7.62 flange with screw(with handle)	PC 5/...-STF-SH-7.62		
EV-10.16	PC 16/...-ST-10.16		EC116V
EV-10.16(W/F)	PC 16/...-STF-10.16		
EV 10.16 flange with screw(with handle)	PC16/...-STF-SH-10.16		
EW-10.16 180D	PCV6-16/...-G1-10.16		
EW-10.16(W/F) 180D	PCV6-16/...-G1F-10.16		
EW-10.16 90D(down)	PC6-16/...-G1-10.16		ECH116R
EW-10.16 90D(up)	PC6-16/...-G1U-10.16		ECH116L
EW-10.16 (W/F)90D(down)	PC6-16/...-G1F-10.16		
EW-10.16(W/F) 90D(up)	PC6-16/...-G1FU-10.16		
V9 5.08 W/O Flange fixed type	MSTBU2.5/...-STD-5.08		
V9 5.08 dinrail holder B type w/o flange	UMSTBVK2.5/...-ST-5.08		
V9 5.08 dinrail holder B type with flange	UMSTBVK2.5/...-STF-5.08		
TS A 3.5	MCVR 1,5/...-ST-3,5		EC350R
TS A 3.5 (W/F)	MCVR 1,5/...-STF-3,5		EC350RM
TS B 3.5	MCVW 1,5/...-ST-3,5		EC350RL
TS B 3.5 (W/F)	MCVW 1,5/...-STF-3,5		EC350RLM
TS A 3.81	MCVR 1,5/...-ST-3,81	AKZ 1700/...-3,81	EC381R

K

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE
TS A 3.81 (W/F)	MCVR 1,5/...-STF-3,81	AKZ 1700/..F-3,81	EC381RM
TS B 3.81	MCVW 1,5/...-ST-3,81	AKZ 1710/...-3,81	EC381RL
TS B 3.81 (W/F)	MCVW 1,5/...-STF-3,81	AKZ 1710/..F-3,81	EC381RLM
TS A 5.0	MVSTBR 2,5/...-ST	AK 1100/...-5,0	5ESDP
TS A 5.0 (W/F)	MVSTBR 2,5/...-STF		5ESDPM
TS B 5.0	MVSTBW 2,5/...-ST	AK 1110/...-5,0	5ESDPL
TS B 5.0 (W/F)	MVSTBW 2,5/...-STF		5ESDPLM
TS A 5.08	MVSTBR 2,5/...-ST-5,08	AKZ 1100/...-5,08	2ESDP
TS A 5.08 (W/F)	MVSTBR 2,5/...-STF-5,08		2ESDPLM
TS B 5.08	MVSTBW 2,5/...-ST-5,08	AKZ 1110/...-5,08	2ESDPL
TS B 5.08 (W/F)	MVSTBW 2,5/...-STF-5,08		2ESDPLM
TS A 7.5	GMVSTBR 2,5/...-ST		7ESDP
TS A 7.5 (W/F)	GMVSTBR 2,5/...-STF		7ESDPM
TS B 7.5	GMVSTBW 2,5/...-ST		7ESDPL
TS B 7.5 (W/F)	GMVSTBW 2,5/...-STF		7ESDPLM
TS A 7.62	GMVSTBR 2,5/...-ST-7,62		3ESDP
TS A 7.62 (W/F)	GMVSTBR 2,5/...-STF-7,62		3ESDPM
TS B 7.62	GMVSTBW 2,5/...-ST-7,62		3ESDPL
TS B 7.62 (W/F)	GMVSTBW 2,5/...-STF-7,62		3ESDPLM
VM 3.81	FRONT-MC 1,5/...-ST-3,81		
VM 3.81 W/F	FRONT-MC 1,5/...-STF-3,81		
VM 5.0	FRONT-MSTB 2,5/...-ST		5ESDF
VM 5.0 W/F	FRONT-MSTB 2,5/...-STF		5ESDFM
VM 5.08		AKZ 1200/...-5,08	2ESDF
VM 5.08 W/F	FRONT-MSTB 2,5/...-STF-5,08	AKZ 1200/..F-5,08	2ESDFM
VM 5.08-low	FRONT-MSTB 2,5/...-ST-5,08		
VM 7.62	FRONT-GMSTB 2,5/...-ST		
VM 7.62 W/F	FRONT-GMSTB 2,5/...-STF		
EM 5.0	SMSTB 2,5/...-ST		
EM 5.0 W/F	SMSTB 2,5/...-STF		
EM 5.08	SMSTB 2,5/...-ST-5,08		2ESDA
EM 5.08 W/F	SMSTB 2,5/...-STF-5,08		2ESDAM
EM 7.5	GSMSTB 2,5/...-ST		
EM 7.5 W/F	GSMSTB 2,5/...-STF		
EM 7.62	GSMSTB 2,5/...-ST-7,62		
EM 7.62 W/F	GSMSTB 2,5/...-STF-7,62		
VL 2.5 180D	MCDV 0,5/...-G1-2,5		
VL 2.5 90D	MCD 0,5/...-G1-2,5		
VL 3.5 180D (B type)			ECHB350V
VL 3.5 180D W/F(B type)			ECHB350VM
VL 3.5 90D (B type)			ECHB350R
VL 3.5 90D W/F(B type)			ECHB350RM
VL 3.81 180D	MCDV 1,5/...G1-3.81		ECHB381V
VL 3.81 180D W/F	MCDV 1,5/...G1F-3.81		ECHB381VM
VL 3.81 90D	MCD 1,5/...G1-3.81		ECHB381R
VL 3.81 90D W/F	MCD 1,5/...G1F-3.81		ECHB381RM
VL 5.0 180D	MDSTBV 2,5/...-G1	STL 975/...G-5,0-V	5EHDBV
VL 5.0 180D (W/F)	MDSTBV 2,5/...-G1F		5EHDBVM
VL 5.0 90D	MDSTB 2,5/...-G1	STL 975/...G-5,0-H	5EHDBR
VL 5.0 90D(W/F)	MDSTB 2,5/...-G1F		5EHDBRM
VL 5.08 180D	MDSTBV 2,5/...-G1-5,08		2EHDBV
VL 5.08 180D(W/F)	MDSTBV 2,5/...-G1F-5,08		2EHDBVM
VL 5.08 90D	MDSTB 2,5/...-G1-5,08		2EHDBR
VL 5.08 90D(W/F)	MDSTB 2,5/...-G1F-5,08		2EHDBRM
VO 3.5 180D	MCDV 1,5/...-G-3,5		EECH350V
VO 3.5 90D	MCD 1,5/...-G-3,5		EECH350R
VO 3.5 180D (W/F)	MCDV 1,5/...-GF-3,5		EECH350VM
VO 3.5 90D (W/F)	MCD 1,5/...-GF-3,5		EECH350RM
VO 3.81 180D	MCDV 1,5/...-G-3,81	STLZ 1570/...G-3,81-V	EECH381V
VO 3.81 180D (W/F)	MCD 1,5/...-G-3,81		EECH381R

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE
VO 3.81 90D	MCDV 1,5/...-GF-3,81	STLZ 1570/...G-3,81-H	EECH381VM
VO 3.81 90D (W/F)	MCD 1,5/...-GF-3,81		EECH381RM
VF 5.0 180D Open	MDSTBV 2,5/...-G		5EEHDV
VF 5.0 180D Close	MDSTBVA 2,5/...-G		
VF 5.0 180D W/F	MDSTBV 2,5/...-GF		5EEHDVM
VF 5.0 90D Open	MDSTB 2,5/...-G		5EEHDR
VF 5.0 90D Close	MDSTBA 2,5/...-G		
VF 5.0 90D W/F	MDSTB 2,5/...-GF		5EEHDRM
VF 5.08 180D Open	MDSTBV 2,5/...-G-5,08	STLZ 970/...-5,08-V	2EEHDV
VF 5.08 180D Close	MDSTBVA 2,5/...-G-5,08		
VF 5.08 180D W/F	MDSTBV 2,5/...-GF-5,08	STLZ 970/...-F-5,08-V	2EEHDVM
VF 5.08 90D Open	MDSTB 2,5/...-G-5,08	STLZ 970/...-5,08-H	2EEHDR
VF 5.08 90D Close	MDSTBA 2,5/...-G-5,08		
VF 5.08 90D W/F	MDSTB 2,5/...-GF-5,08	STLZ 970/...-F-5,08-H	2EEHDRM
VZ 3.81	DFK-MC 1,5/...-GF-3,81		ECHP381V
VZ 5.08	DFK-MSTB 2,5/...-GF		2EHDP
V7 3.5 180D	IMCV 1,5/...-G		
V7 3.5 180D (W/F)	IMCV 1,5/...-GF		
V7 3.5 90D	IMC 1,5/...-G		
V7 3.5 90D (W/F)	IMC 1,5/...-GF		
V7 3.81 180D	IMCV 1,5/...-G-3,81		
V7 3.81 180D (W/F)	IMCV 1,5/...-GF-3,81		
V7 3.81 90D	IMC 1,5/...-G-3,81		
V7 3.81 90D (W/F)	IMC 1,5/...-GF-3,81		
V7 5.0 180D	ICV 2,5/...-G		
V7 5.0 180D (W/F)	ICV 2,5/...-GF		
V7 5.0 90D	IC 2,5/...-G		
V7 5.0 90D (W/F)	IC 2,5/...-GF		
V7 5.08 180D	ICV 2,5/...-G-5,08		2ESDCV
V7 5.08 180D (W/F)	ICV 2,5/...-GF-5,08		2ESDCVM
V7 5.08 90D	IC 2,5/...-G-5,08		2ESDCR
V7 5.08 90D (W/F)	IC 2,5/...-GF-5,08		2ESDCRM
V7 7.5 180D	GICV 2,5/...-G		
V7 7.5 180D (W/F)	GICV 2,5/...-GF		
V7 7.5 90D	GIC 2,5/...-G		
V7 7.5 90D (W/F)	GIC 2,5/...-GF		
V7 7.62 180D	GICV 2,5/...-G-7,62		
V7 7.62 180D (W/F)	GICV 2,5/...-GF-7,62		
V7 7.62 90D	GIC 2,5/...-G-7,62		
V7 7.62 90D (W/F)	GIC 2,5/...-GF-7,62		
EU-5.0-xP Right	MSTBO 2.5/...-G1L(Left)		
EU-5.0-xP Left	MSTBO 2.5/...-G1R(Right)		
EU-3.5-xP Right	MCO 1.5/...-G1L-3.5 KMGY(Left)		
EU-3.5-xP Left	MCO 1.5/...-G1R-3.5 KMGY(Right)		
V5 5.08 Bottom cover fixed type	MVSTBU2.5/...-GB	AKZS950/...GMB-5.08	ZEHDRS
V5 5.08 (W/F)Bottom cover fixed type	MVSTBU2.5/...-GFB		ZEHDRSM
V5 5.08 Dinrail holder A type	MSTBVK2,5/...-G-5.08		
V5 5.08 (W/F)Dinrail holder A type	MSTBVK2,5/...-GF-5.08		
V5 5.08 Dinrail holder B type	UMSTBVK2,5/...-G-5,08	AKZS950/...G-5.08	
V5 5.08 (W/F)Dinrail holder Btype	UMSTBVK2,5/...-GF-5,08	AKZS950/...F-5.08	
KE 3.5 Close Vertical	MCDNV1,5...-G1-3,5 P26THR		
KE 3.5 Close Right Angle	MCDN1,5...-G1-3,5 P26THR		
KE 3.5 with holder Vertical	MCDNV1,5...-G1-3,5 RNP26THR		
KE 3.5 with holder Right Angle	MCDN1,5...-G1-3,5 RNP26THR		
K3 3.5 90D			0221-27XXTHT
KE 5.0 W/O FLANGE	CCDN 2.5/...-G1 P26		
KE 5.0 W/FLANGE	CCDN 2.5/...-G1F P26		
KK 10.16	IPC 16...-ST-10,16		
KK 10.16 flange wih screw	IPC 16...-STF-10,16		
KK 10.16 flange with screw (with handle)	IPC 16/...-STF-SH-10.16		

K

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	DINKLE	
KK 10.16 flange with nut	IPC 16/...-STGF-10.16			
KK 10.16 flange with nut (with handle)	IPC 16/...-STGF-SH-10.16			
KL 10.16mm close Vertical	IPCV 16/...-G-10,16			
KL 10.16 W/F close Vertical	IPCV 16/...-GF-10,16			
KL 10.16 close Right angle(up)	IPC 16/...-G-10,16			
KL 10.16 W/F close Right angle (up)	IPC 16/...-GF-10,16			
KL 10.16 close Right angle(down)	IPC 16/...-GU-10,16			
KL 10.16 W/F close Right angle (down)	IPC 16/...-GUF-10,16			
KJ10.16	PCU 6/...-STD-10,16			
V5 3.81(W/F)Bottom cover fixed type	MCVU1,5/-GFD-3,81			
V8 3.81 w/o flange	IMC1,5/...-ST-3,81			
V8 3.81 flange with Nut	IMC1,5/...-STGF-3,81			
V8 5.08 w/o flange	IC2,5/...-ST-5,08			
V8 5.08 flange with Nut	IC2,5/...-STGF-5,08			
V8 5.08 flange with Screw	IC2,5/...-STF-5,08			
V8 7.62 w/o flange	GIC2,5/...-ST-7,62			
V8 7.62flange with Nut	GIC2,5/...-STGF-7,62			
V8 7.62 flange with Screw	GIC2,5/...-STF-7,62			
KF-3.5	ZEC1,0/...-LPV-3,5			
KF-5.0	ZEC1,0/...-LPV-5.0			
KF-7.5	ZEC1,0/...-LPV-7,5			
K13.81 W/O Flange	MCC 1/...-STZ-3.81			
K13.81 W/Flange	MCC 1/...-STZF-3.81			
K15.08 W/O Flange	MSTBC 2.5/...-ST-5.08			
K15.08 W/Flange	MSTBC 2.5/...-STZF-5.08			
KV 5.08 W/Hook latch	ICC 2.5/...-STZ-5.08			
KV 5.08 W/Flange Screw	ICC 2.5/...-STZF-5.08			
KT 7.62 W/o flange	IPC 5/...-ST-7.62			
KT 7.62 W/flange screw	IPC 5/...-STF-7.62			
KT 7.62 W/flange and handle	IPC 5/...-STF-SH-7.62			
KT 7.62 W/flange nut	IPC 5/...-STGF-7.62			
KS 7.62 180D W/o flange	IPCV 5/...-G-7.62			
KS 7.62 180D W/flange	IPCV 5/...-GF-7.62			
KS 7.62 90D W/o flange PCB up	IPC 5/...-G-7.62			
KS 7.62 90D W/o flange PCB down	IPC 5/...-GU-7.62			
KS 7.62 90D W/flange PCB up	IPC 5/...-GF-7.62			
KS 7.62 90D W/flange PCB down	IPC 5/...-GUF-7.62			
VC 7.62 180D W/o flange B type	PCV 5/...-G-7.62			
VC 7.62 180D W/flange B type	PCV 5/...-GF-7.62			
VC 7.62 90D W/o flange PCB up B type	PC 5/...-G-7.62			
VC 7.62 90D W/o flange PCB down B type	PC 5/...-GU-7.62			
VC 7.62 90D W/flange PCB up B type	PC 5/...-GF-7.62			
VC 7.62 90D W/flange PCB down B type	PC 5/...-GUF-7.62			
KU 15.0 180D	PCV 35 HC/...-GF-15.00			
KU 15.0 90D	PC 35 HC/...-GF-15.00			
KU 15.0 90D With shield	PC 35 HC/...-GF-SH-15.00			
KX 15.0 W/F	PC 35 HC/...-STF-15.00			
KX 15.0 W/Handle(shield)	PC 35 HC/...-STF-SH-15.00			
K4 5.08 SERIES	SKBD-5.08			
K5 5.08 W/O Flange	TVMSTB 2.5/...-ST-5.08			
K5 5.08 With Flange	TVMSTB 2.5/...-STF-5.08			
Spring Clamp Pluggable System				
ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	WAGO	DINKLE
HI 5.0 -hook&Pillar		AK 3950/...-5,0	WAGO 231	0134-12
HI 5.0 -W/Flange			WAGO 231	
HI 5.0 -W/locking			WAGO 231	0134-14
HI 5.0 -100% protected against mismatching			WAGO 721	
HI 7.5 -hook&Pillar			WAGO 231	0134-32
HI 7.5 -W/Flange			WAGO 231	
HI 7.5 -W/locking			WAGO 231	0134-34

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	WAGO	DINKLE
HI 7.5 -100% protected against mismatching			WAGO 721	
HP 3.81	QC 0,5/...-ST-3,81			
HP 3.81 W/F	QC 0,5/...-STF-3,81			
HP 5.08	QC 1/...-ST-5,08			
HP 5.08 W/F	QC 1/...-STF-5,08			
HW 2.5	FK-MC 0,5/...-ST-2,5			ESC250V
HW 3.5 w/o flange	FK-MCP1,5/...-ST-3.5			
HW3.5 with flange	FK-MCP1,5/...-STF-3.5			
HW 3.81	FK-MCP 1,5/...-ST-3,81			
HW-3.81 W/F	FK-MCP 1,5/...-STF-3,81			ESC381VM
HW 5.08 Contact on down side	FKC 2,5/...-ST-5,08			
HW-5.08 W/F Contact on down side	FKC 2,5/...-STF-5,08			
HW 5.08Contact on up side	FKCT 2,5/...-ST-5,08			2ESDS
HW-5.08 W/FContact on up side	FKCT 2,5/...-STF-5,08			
HW 5.0 Contact on down side	FKC 2,5/...-ST-5,0			
HW-5.0 W/F Contact on down side	FKC 2,5/...-STF-5,0			
HW 5.0Contact on up side	FKCT 2,5/...-ST-5,0			
HW-5.0 W/FContact on ip side	FKCT 2,5/...-STF-5,0			
HW -7.5	GFKC2,5/...-ST-7.5			
HW 7.5-W/F	GFKC2,5/...-STF-7.5			
HW 7.62	GFKC2,5/...-ST-7.62			
HW-7.62 W/F	GFKC2,5/...-STF-7.62			
H4 5.0-A	FKCVR 2,5/...-ST			
H4 5.0-A W/F	FKCVR 2,5/...-STF			
H4 5.0-B	FKCVW 2,5/...-ST			
H4 5.0-B W/F	FKCVW 2,5/...-STF			
H4 5.08-A	FKCVR 2,5/...-ST-5,08			
H4 5.08-A W/F	FKCVR 2,5/...-STF-5,05			
H4 5.08-B	FKCVW 2,5/...-ST-5,08			
H4 5.08-B W/F	FKCVW 2,5/...-STF-5,08			
H5 5.0 w/o flange	FKIC2,5/...-ST			
H5 5.0-W/F Screw	FKIC2,5/...STF			
NC 5.0 -Right Angle			WAGO 231	0135-11
NC 5.0 -Vertical			WAGO 231	0135-10
NC 5.0 -Right Angle(hook holder)			WAGO 721	0135-17
NC 5.0 -Vertical(hook holder)			WAGO 721	0135-16
NC 7.5 -Right Angle			WAGO 231	0135-31
NC 7.5 -Vertical			WAGO 231	0135-30
NC 7.5 -Right Angle(hook holder)			WAGO 721	0135-37
NC 7.5-Vertical(hook holder)			WAGO 721	0135-36
NB 5.0 w/o flange			WAGO 231	
NB 5.0 with flange			WAGO 231	
NB 5.0 with Hook holder			WAGO 721	
NB 5.0 with Hook holder(w/f)			WAGO 721	
NB 7.5 w/o flange			WAGO 731	
NB 7.5 with flange			WAGO 731	
NB 7.5 with Hook holder			WAGO 731	
NB 7.5 with Hook holder(w/f)			WAGO 731	
H5 5.08 w/o flange	FKIC2,5/...-ST-5.08			
H5 5.08-W/F Screw	FKIC2,5/...STF-5,08			
KD 3.5/3.81	FMC 1,5/...-ST-3,5(-3.81)			
KD3.5/3.81 with flange	FMC 1,5/...-STF-3,5(-3.81)			
KD 3.5/3.81 with latch	FMC 1,5/...-ST-3,5-RF(-3.81)			
KD 5.0/5.08	FKCN 2,5/...-ST(-5.08)			
KD 5.0/5.08 with flange	FKCN 2,5/...-STF(-5.08)			
ND 3.5	ZEC 1,5/...-ST-3.5			
ND 5.0	ZEC 1,5/...-ST-5.0			
ND 7.5	ZEC 1,5/...-ST-7.5			
KD 3.5 Double type	FMCD 1,5/...-ST-3,5			
KD 3.5 W/FDouble type	FMCD 1,5/...-STF-3,5			

CROSS REFERENCE

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	WAGO	DINKLE
NF 5.08 W/O Flange	TFKC 2.5/...-ST-5.08			
NF 5.08 With Flange	TFKC 2.5/...-STF-5.08			
Spring Clamp System				
HA 2.54 180D	FFKDS/H-2,54			141R
HA 2.54 90D	FFKDS/V-2,54			141V
HA 3.81 180D	FFKDS/H-3.81			
HA 3.81 90D	FFKDS/V-3.81			
HA 5.08 180D	FFKDS/H1-5.08			142R
HA 5.08 90D	FFKDS/V1-5.08			142V
HA 7.62180D	FFKDSA/H1-7.62			142R-..P3
HA 7.62 90D	FFKDSA/V1-7.62			142V-..P3
HB 3.81			WAGO 235	144RA-..P1
HB 3.96			WAGO 235	
HB Single 5.0 (W/Lever)		AK 4101/..KD-5,0	WAGO 235	144RA-..P
HB Double 5.0 (W/Lever)			WAGO 235	244RA
HB Single 5.0(W/O lever)		AK 4100/...-5,0	WAGO 235	144R-..P
HB Single 7.5 w/lever			WAGO 235	144RA-..P3
HB Double 7.5 w/lever			WAGO 235	244RA-..P3
HB Single 7.5(W/O lever)			WAGO 235	144R-..P3
HB Single 10.0 (W/Lever)			WAGO 235	
HB Double 10.0 (W/Lever)			WAGO 235	
HB Single 10.0 (W/O lever)			WAGO 235	
HC 2.5	PTSA0,5/...-2,5-Z		WAGO 250	0136-10
HC 3.5	PTSA1,5/...-3,5-Z	AK 4291/..KDVP-3,5	WAGO 250	0136-20
HC 7.0			WAGO 250	
HD 5.08	MFKDSP/...-5,08	AKZ 4301/...-KD-5,08		
HE 2.5 W/Lever		AK(Z) 3191/...-KD-2,5	WAGO 233	WKA250A
HE 2.5 W/O Lever		AK(Z) 3191/...-2,5	WAGO 233	
HE 2.54 W/Lever		AK(Z) 3191/...-KD-2,54	WAGO 233	WKA254A
HE 2.54 W/O Lever		AK(Z) 3191/...-2,54	WAGO 233	
HE 5.0 W/Lever			WAGO 233	
HE 5.08 W/Lever			WAGO 233	
HF 5.0 Low Profile			WAGO 735	
HF 5.0 High profile			WAGO 735	
HG 5.0	ZFKDS1,5C-5,0	AK 3000/...-5,0	WAGO236	WKA500
HG 5.08	ZFKDS1,5-5,08	AK 3000/...-5,08	WAGO236	WKA508
HG 7.5		AK 3000/...-7.5	WAGO236	WKA750
HG 7.62		AK 3000/...-7.62	WAGO236	WKA762
HG 10.0		AK 3000/...-10,0	WAGO236	WKA100
HG 10.16		AK 3000/...-10,16	WAGO236	WKA116
HH 5.0		AK 3100/...-5,0		
HL 3.5			WAGO 251	
HM 3.81 Dip solder			WAGO 739	
HM 3.81 Press Fit			WAGO 739	
HM 5.0 Dip solder			WAGO 739	
HM 5.0 Press Fit			WAGO 739	
HM 7.5 Dip solder			WAGO 739	
HM 7.5 Press Fit			WAGO 739	
HM 10.0 Dip solder			WAGO 739	
HM 10.0 Press Fit			WAGO 739	
HM 5.08 Dip solder			WAGO 739	
HM 5.08 Press Fit			WAGO 739	
HM 7.62 Dip solder			WAGO 739	
HM 7.62 Press Fit			WAGO 739	
HM 10.16 Dip solder			WAGO 739	
HM 1016 Press Fit			WAGO 739	
HQ 5.08	ZFKKDS 1,5-5,08	AKZ 3750/...-5,08	WAGO 736	WKK508
HQ 7.62			WAGO 736	
HQ 10.16			WAGO 736	
HR 5.08	ZFK3DS 1,5-5,08		WAGO 737	W3K508

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	WAGO	DINKLE
HR 7.62			WAGO 737	
HR 10.16			WAGO 737	
HT 5.0		AK 3001/..KD-5,0	WAGO 256	WKA500A
HT 5.08	ZFKDS1,5-W-5,08	AK 3001/..KD-5,08	WAGO 256	WKA508A
HT 7.5		AK 3001/..KD-7.5	WAGO 256	WKA750A
HT 7.62		AK 3001/..KD-7.62	WAGO 256	WKA762A
HT 10.0		AK 3001/..KD-10.0	WAGO 256	WKA100A
HT 10.16		AK 3001/..KD-10.16	WAGO 256	WKA116A
HV 3.81			WAGO 735	
H2 7.5	ZFKDS 4-7,5		WAGO 745	
H2 10.0	ZFKDS 4-10		WAGO 745	
H3 5.0			WAGO 745	
H3 7.5			WAGO 745	
H3 10.0			WAGO 745	
H8 10.0	ZFKDS10-10.00		WAGO 745	
H8 15.0	ZFKDS10-15.00		WAGO 745	
H8 20.0			WAGO 745	
H6 5.0			WAGO 804	
H6 7.5			WAGO 804	
H7 5.0			WAGO 253	
H7 7.5			WAGO 253	
HS	ZFK4DS1.5-5.08		WAGO738	
DS240			WAGO 240	
NE 5.0			WAGO 250	
NE 7.5			WAGO 250	
NH 3.5	SPTA 1/...-3.5			
NH 5.0	SPTA 1/...-5.0			
NI 3.81	SPTA 1.5/...-3.81			
NI 5.08	SPTA 1.5/...-5.08			
H9 5.08	FKDS-5.08			
NK 7.5 Vertical	SPT 5/...-V-7.5			
NK 7.5 Horizontal	SPT 5/...-H-7.5			
NJ 3.5 Vertical	SPT 1.5/...-V-7.5			
NJ 3.5 Horizontal	SPT 1.5/...-H-7.5			
NJ 5.0 Vertical	SPT 2.5/...-V-7.5			
NJ 5.0 Horizontal	SPT 2.5/...-H-7.5			
NP10.0 Horizontal	SPT 16/ 2-H-10,0-ZB			
NQ 2.5 SMT Type	PTSM 0,5/2-2,5-H SMD			

Accessories

ANYTEK	PHOENIX CONTACT	Phoenix Mecano(PTR)	WAGO
AI	FLRP/ICV(rechts)/(links)		
AN	ME17.5UTR/ME22.5UTR		
AP	CP-HCC4		
AM	MEMAX		
AD	KGS-MSTB 2,5/..		
AE	CP-MSTB		
AF	CR-MSTB		
AJ			WAGO 236-332
AK			WAGO 231-131
AS	IC-DFR...		
AT			WAGO 209-137

Barrier terminal block

ANYTEK	DINKLE	DECA	
YK30	DT-2	T21	
YK 50	DT-4	T24	
YK 60	DT-5	T25	
YK 21		T30	
YK 31	DT-25	T31	
YK 41	DT-35	T32	
YK 51	DT-45	T34	
YK 61	DT-55	T35	
YK 42	DT-31		

CROSS REFERENCE

ANYTEK	DINKLE	DECA	
YK 22	DT-29	T40	
YK 33	DT-39	T42	
YK 44	DT-49	T44	
YK 55	DT-69	T46	
YK 66	2DSC		
YK 77	4DSC	TS4-2241	
YK 111~YK114	EM-1	TE1-1	
YE11E-4P		TEH-1	
YK50A	DT-4		
YK70		T36	
YK70A	DT-66		
YK901	0032-1110		
YK88	DT-79		
Other			
ANYTEK	Weidmuller		
HP 5.08 SERIES	BL1DC 5.08		
HN 5.08 SERIES	BLZF 5.08		
AH Series	SLAT		
EL 3.5 Series Close	SL-SMT3.5/90G or 180G		
EL 3.5 Series Open	SL-DIP3.5/90 or180		
ET 7.62	BVZ 7.62		
ET 7.62 W/F	BVZ 7.62F		
VC 7.62 180D	SV 7.62/180		
VC 7.62 180D W/F	SV7.62/180F		
VC 7.62 90D	SV7.62/90		
VC 7.62 90D W/F	SV7.62/90F		
EV 10.16	BUZ10.16		
EV 10.16 W/F	BUZ10.16F		
EW 10.16 90D(down)	SU10.16/270		
EW 10.16 90D(up)	SU10.16/90		
EW 10.16 90D W/F(down)	SU10.16/270F		
EW 10.16 90D W/F (up)	SU10.16/90F		
EW 10.16 180D	SU10.16/180		
EW 10.16 180D W/F	SU10.16/180F		
VP 10.16 SERIES(Single tail)	LU 10.16/90 2ST1		
VP 10.16 (Double tail)	LU 10.16/./90		
VP 12.7	LUP 12.7/90		
E2 3.5	BL3.5/180		
VW 3.5 Without flange	B2L 3.5		
VW 3.5 With flange	B2L 3.5F		
VX 3.5 Open Vertical	S2L 3.5/180		
VX 3.5 Open Right angle	S2L 3.5/90		
VX 3.5 close Vertical	S2L 3.5/180G		
VX 3.5 close Right angle	S2L 3.5/90G		
VX 3.5 W/F Vertical	S2L 3.5/180F		
VX 3.5 W/F Right angle	S2L 3.5/90F		
HN 3.5 Without flange	BLZF 3.5/180		
HN 3.5 With flange	BLZF 3.5/180F		
NM 3.5 Vertical 90D wire inlet	LSF-SMT 3.5/180		
NM 3.5 Horizontal 180D wire inlet	LSF-SMT 3.5/90		
NM 3.5 45D wire inlet	LSF-SMT 3.5/135		
ANYTEK	SAURO		
TT 5.0	CSF		
YI5.08	PSQ		

CROSS REFERENCE

ANYTEK			STELVIO	
HD 5.08 SERIES			CTL	
EQ 5.0 180D			CUU	
EQ 5.0 90D			CUU..SQ	
ER			CPP..SQ	
ANYTEK			ITW ElettroGiBI	
T4 5.0/7.5/10.0 SERIES			PA266	
ANYTEK			RIA	
TX 5.0 SERIES			TYPE 07 & TYPE 107	
EO 5.0 SERIES			TYPE 207	
EP 5.0			TYPE48	
TY 5.0 Solid Block			TYPE 157	
EX5.0 Series			TYPE41	
EZ 5.0			TYPE09	
EB 5.0			TYPE96	
EB 5.08			TYPE97	
H9 5.08			AST186	
ANYTEK			SEOIL	
HX 3.5 180D			USL-3HB2	
HX3.5 90D			USL-3VB1	
HX-5.0-180D			USL-5HB2	
HX-5.0-90D			USL-5VB1	
ANYTEK			WECO	
TQ Solid Block			TYPE 974 AND 974-DS	
TZ 5.0 SERIES SMT			TYPE 140-A-SMD	
TY 5.0 SERIES			TYPE 950-NLFL-DS	
VG 5.0 SERIES			TYPE 954-NLFL-DS	
KR 5.0 Series			TYPE 950-FL-DS	
TZ 3.5 Series SMT			TYPE 210-A-121-SMD	
EC 3.5 Series SMT			TYPE 930-D-SMD	
ANYTEK			Lumberg	
TK 5.0 SERIES			KRESS	
TL 5.0 SERIES			KRESL	
ANYTEK	Dinkle	WAGO	DEGSON	DECA
NZ		2706		
XA 6.35	0177-5xxx			
N4(VW 3.5)	0156-2DXX-BK_36		15EDGKNHBG-3.5-XXP-1Y-100A	
KD 3.81			15EDGKNGB-3.81	
TW HC970				BCM-100-xx
ANYTEK		Phoenix		Weidmuller
NL 3.5		DFMC-1-5-12-ST-3-5-LR_FAM		B2CF 3.50/180F
NR		DMC 1,5 /DMCV 1,5		
EF 5.08 3P		MKKDSH 3/ 2-EX		
KD 2.54		FMC 0.5/11-ST-2.54		
OQ 2.54		MCV-0-5-11-G-2-54		
E5 2*8P~2*12P		FRONT-FMC 1.5/DXX-FF-6.35-R		
E5 2*14P&2*16P		FRONT-FMC 1.5/D28-FF-6.35-R		
		FRONT-FMC 1.5/D32-FF-6.35-R		
NK 7.5		SPT5/2-V-7.5		
V8 5.08		MSTB-2-5-6-STF-5-08		
K9		MKDSP-50-3-17-5		
N9		PTSM 0.5/3-2.5-V THR (Pitch-2.5,N9 Pitch-3.81)		

Technical information

Schematic to determine the clearances 確定電氣間隙的流程圖

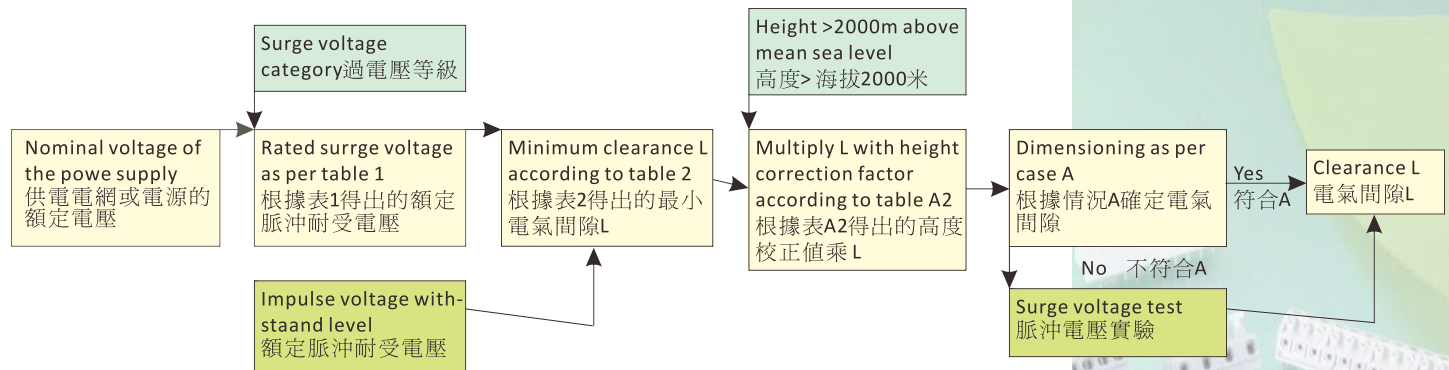


Table 1 Rated impulse voltage for equipment energized directly from low-voltage mains 額定脈沖耐受電壓

Nominal voltage of the supply system based on IEC 60038 IEC60038交流電網的額定電壓(以V為單位)		Voltage line to neutral derived from nominal voltages and including [V] 相對電壓(以V為單位, 交流有效值或直流平均值)小於或等於	Rated impulse voltage 額定脈沖電壓值[V]			
Three phase 三相	Single phase 單相		Overvoltage category 過壓等級			
			I	II	III	IV
	120-240	50	330	500	800	1500
		100	500	800	1500	2500
		150	800	1500	2500	4000
230/240 277/480		300	1500	2500	4000	6000
400/690		600	2500	4000	6000	8000
1000		1000	4000	6000	8000	12000

Table 2 Clearance to withstand transient overvoltages 最小電氣間隙

Required impulse withstand voltage 額定脈沖耐受電壓	Min. Clearance in air up to 2000 m above sea level		
	Case A, Inhomogeneous field 情況A,非均勻場		
	Pollution degree 汚染等級		
	1	2	3
kV	mm	mm	mm
0.33	0.01	0.2	0.8
0.4	0.02		
0.5	0.04		
0.6	0.06		
0.8	0.10		
1.0	0.15	0.25	1.0
1.2	0.25		
1.5	0.5		
2.0	1.0	1.0	1.0
2.5	1.5	1.5	1.5
3.0	2.0	2.0	2.0
4.0	3.0	3.0	3.0
5.0	4.0	4.0	4.0
6.0	5.5	5.5	5.5
8.0	8.0	8.0	8.0
10	11	11	11
12	14	14	14

Overvoltage category

Overvoltage I

Equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level
適用在低電壓及低瞬時電壓之設備。

Overvoltage II

Energy-consuming equipment to be supplied from the fixed installation
適用在一般固定式能源設備。

Overvoltage III

Equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirement
適用在特殊用途之固定式設備。

Overvoltage IV

Equipment for use at the origin of the installation
應用在電力系統上。

Pollution degree

Pollution degree 1

No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.
無污染或是乾燥、無導電性場所。如無塵室。

Pollution degree 2

Only non-conductive pollution occurs that occasionally a temporary conductivity caused by condensation is to be expected.
只有無導電性污染，或是偶爾有因凝結物(例如灰塵)產生之短暫導電性污染。如辦公室、居家場所。

Pollution degree 3

Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.
因凝結物(例如灰塵)所造成之導電性污染或是乾燥之無導電性污染等污染。如工廠或是室內公共場所。

Pollution degree 4

Continuous conductivity occurs due to conductive dust, rain or other wet conditions.
由於灰塵、雨水或是其他戶外潮濕環境等引起的持續導電性污染。如戶外公共場所。

Technical information

Height correction factors 高度校正值 (Extract from table A.2) (表格 A.2 節選 DIN VDE0110:1989-01)		
Height [m] 高度 [m]	Normal compressed air in [kPa] 正常氣壓 [kPa]	Multiplication factor for distances 間隙校正因數
2000	80.0	1.00
3000	70.0	1.14
4000	62.0	1.29
5000	54.0	1.48
6000	47.0	1.70
7000	41.0	1.95
8000	35.5	2.25
9000	30.5	2.62
10000	26.5	3.02
15000	12.0	6.67
20000	5.5	14.5


Table 4 Minimum creepage distance 最小爬電距離

Rated ¹⁾ voltage a.c., r.m.s. or d.c 額定電壓 V	Minimum creepage distance, mm 最小爬電距離和爬電距離									
	Pollution degree 污染等級									
	1	2			3			4		
		Material group			Material group			Material group		
		I	II	III	I	II	III ²⁾	I	II	III
63	0.2	0.63	0.9	1.25	1.6	1.8	2	2.1	2.6	3.4
80	0.22	0.67	0.95	1.3	1.7	1.9	2.1	2.2	2.8	3.6
100	0.25	0.71	1	1.47	1.8	2	2.2	2.4	3	3.8
125	0.28	0.75	1.05	1.5	1.9	2.1	2.4	2.5	3.2	4
160	0.32	0.8	1.1	1.6	2	2.2	2.5	3.2	4	5
200	0.42	1	1.4	2	2.5	2.8	3.2	4	5	6.3
250	0.56	1.25	1.8	2.5	3	3.5	4	5	6.3	7.5
320	0.75	1.6	2.2	3.2	4	4.5	5	6	7.3	8.6
400	1	2	2.8	4	4.5	5.3	6	7	8.5	10
500	1.3	2.5	3.6	5	6	7	8	9	11	13
630	1.8	3.2	4.5	6.3	8	9	10	11.1	13.6	16.1
800	2.4	4	5.6	8	9	10.5	12	13.8	17	20.2
1000	3.2	5	7.1	10	12	14	16	17	21	25

1) This voltage is

- For function insulation: the operating voltage.
- For base insulation and additional insulation of a circuit fed directly by the low voltage selected from table 3a or 3b on the basis of the rated voltage of the items or the rated insulation voltage;
- For base and additional insulation of systems, items and internal circuits which are not fed directly by the mains: the highest true r.m.s. Value of the voltage that, within the bounds of the rated data, can occur in the system, the items or the internal circuit, when supplied with rated voltage and in the case of an unfavorable combination of operating conditions.





2) In the case of pollution degree 3, insulation material group IIIb is not recommended for use if voltages are greater than 630V.

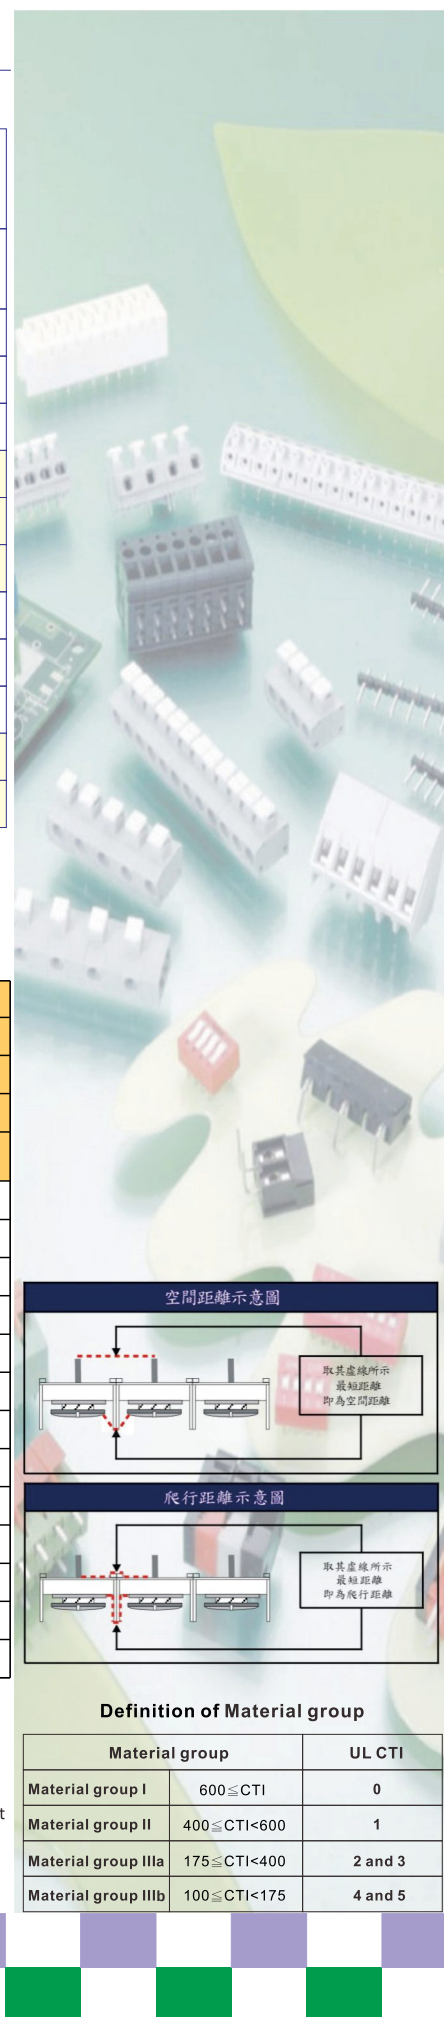

Technical information

Table 7 Values of torque for screw type clamping units IEC 61984 7/table 7

Table 102 Values of torque for screw type clamping units Extract form IEC 60998-2-1/table 102

Nominal diameter Of thread mm	 I Nm	 II Nm	 III Nm	 IV Nm	 V Nm
≤ 1.6	-	-	0.1	0.1	-
> 1.6 up to 2.0	-	-	0.2	0.2	-
> 2.0 up to 2.8	0.2	-	0.4	0.4	-
> 2.8 up to 3.0	0.25	-	0.5	0.5	-
> 3.0 up to 3.2	0.3	-	0.6	0.6	-
> 3.2 up to 3.6	0.4	-	0.8	0.8	-
> 3.6 up to 4.1	0.7	1.2	1.2	1.2	1.2
> 4.1 up to 4.7	0.8	1.2	1.8	1.8	1.8
> 4.7 up to 5.3	0.8	1.4	2.0	2.0	2.0
> 5.3 up to 6.0	1.2	1.8	2.5	3	3
> 6.0 up to 8.0	2.5	2.5	3.5	6	4
> 8.0 up to 10	-	3.5	4	10	6
> 10 up to 12	-	4	-	-	8
> 12 up to 15	-	5	-	-	10

Column I applies to screws without heads if the screw, when tightened, does not protrude from the screw hole and to other screws which cannot be tightened by means of a screwdriver with a blade wider than the diameter of the screw.

Column II applies to nuts of mantle clamping units which are tightened by means of a screwdriver.


Column III applies to other screws which are tightened by means of a screwdriver.

Column IV applies to screws and nuts, other than nuts of mantle clamping units, which are tightened by means other than a screwdriver.

Column V applies to nuts of mantle clamping units which can be tightened by means other than that of a screwdriver.

Where a screw has a hexagonal head with a slot and the values in column III and IV are different, the test is made twice, first on a set of three specimens, applying to the hexagonal head the torque specified in column IV, and then to another set of three specimens, applying the torque specified in column III by means of a screwdriver. If the values in columns III and IV are the same, only the test with the screwdriver shall be made.

1 N.m=10.2 Kgf.cm	1 N.m=8.852 Lb-in
1 Lb-in=1.1521 Kgf.cm	1 Lb-in=0.113 N.m
1 Kgf.cm=0.0981 N.m	1 Kgf.cm=0.868 Lb-in

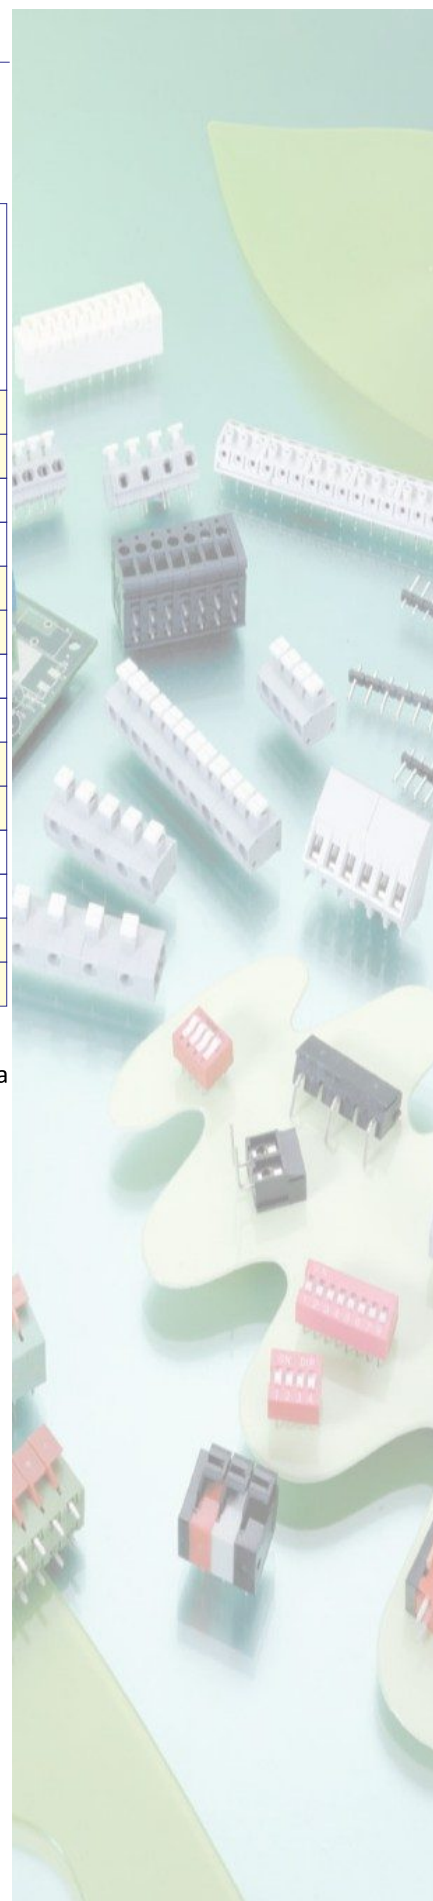

Technical information

Construction and dimensions of connection lines 導線的構造與尺寸
To DIN VDE 0295/5.86 American Wire Gauge (AWG)

歐規導線規格[mm²]					美制導線規格[AWG]						
Rated-Cross-Section 導線截面積	Single-Strand Max. 單股導線 最大直徑 Ø	Multi-Strand') Max. Min. 多股導線 最大直徑 Ø No.of Strands 芯線根數	Fine a. Microtine Max. Min. 細股(柔性)導線 最大直徑 Ø Strand Fine 芯線根數(參考值)		線號	Solid wires 單股導線 最大直徑 Ø 導線截面積 Circ.mil mm²			Stranded wires 多股導線 最大直徑 Ø 導線截面積 Circ.mil mm²		
mm²	mm	mm	mm	mm	AWG Nr.	mm	Circ.mil	mm²	mm	Circ.mil	mm²
0.2	0.5	-	-	-	24	0.51	404	0.21	-	-	-
0.5	0.9	1.1	7	1.1	20	0.81	1022	0.52	0.97	1111	0.56
0.75	1.0	1.2	7	1.3	18	1.02	1620	0.82	1.16	1600	0.82
1	1.2	1.4	7	1.5	(17)	1.15	2050	1.04			
-	-	-	-	-	16	1.29	2580	1.31	1.50	2580	1.32
1.5	1.5	1.7	7	1.8	(15)	1.45	3260	1.65			
-	-	-	-	-	14	1.63	4110	2.08	1.85	4100	2.09
2.5	1.9	2.2	7	2.3	(13)	1.83	5180	2.63			
-	-	-	-	-	12	2.05	6530	3.31	2.41	6500	3.32
4	2.4	2.7	7	2.9	(11)	2.30	8230	4.17			
-	-	-	-	-	10	2.59	10400	5.26	2.95	10530	5.37
6	2.9	3.3	7	3.9	(9)	2.91	13100	6.36			
-	-	-	-	-	8	3.26	16500	8.37	3.73	16625	8.48
10	3.7	4.2	7	5.1	(7)	3.67	20800	10.56	4.15	20820	10.55
-	-	-	-	-	6	4.12	26300	13.30	4.67	26250	13.39
16	4.6	5.3	7	6.3	(5)	4.62	33100	16.77	4.95	33100	16.77
-	-	-	-	-	4	5.19	41700	21.15	5.90	41650	21.24
25	-	6.6	7	7.8	3	5.83	52600	26.67	6.61	52630	26.67
35	-	7.9	7	9.2	2	6.54	66400	33.59	7.42	66150	33.74
-	-	-	-	-	1	7.35	83700	42.43	8.33	83706	42.69
50	-	9.1	19	11.0	1/0	8.25	106000	53.46	9.35	104640	53.36
70	-	11	19	13.1	2/0				10.52	132300	67.47
-	-	-	-	-	3/0				11.79	172500	87.98
95	-	12.9	19	15.1	4/0				13.26	210400	107.3
120	-	14.5	37	17	5/0				14.62	250000	127.0
150	-	16.2	37	19	6/0				16.00	300000	152.0
185	-	18	37	21	350MCH 400MCH				17.30	350000	177.0
									18.49	400000	203.0

1)Values for non-compacted circular conductors.

Copper conductors according to DIN VDE 0295 (IEC 60228)

Single wire

Wire diameter =1.78mm
Number of wires =1
Conductor dia.max. =1.9mm
Nominal cross section =2.5mm²

Fine stranded

Wire diameter =0.26mm
Number of wires = 50
Conductor dia.max. =2.3mm
Nominal cross section =2.5mm²

Multi-wire

Wire diameter =1.78mm
Number of wires = 7
Conductor dia.max. = 2.2 mm
Nominal cross section =2.5mm²

Ultra-fine stranded

Wire diameter =0.26mm
Number of wires =45
Conductor dia.max. =2.3mm
Nominal cross section =2.5mm²



Static Heating Sequence Table

Conductor Size		A	Secureness								Pullout			
			Diameter of Bushing Hole		Height		Copper		Aluminum or Copper Clad Aluminum		Copper		Aluminum or Copper Clad Aluminum	
			Inch	mm	Inch	mm	Pound	Kg	Pound	Kg	Pound	N	Pound	N
30	0.05	0.5									1/2	2.2		
28	0.08	0.8									1	4.5		
26	0.13	1									2	8.9		
24	0.2	2									3	13.4		
22	0.32	3									4.5	20		
20	0.52	5									6.75	30		
18	0.82	7	1/4	6.4	10-1/4	260	1	0.45			6.75	30		
16	1.3	10	1/4	6.4	10-1/4	260	1	0.45			9	40		
14	2.1	15	3/8	9.5	11	279	1.5	0.68			11.5	50		
12	3.3	20	3/8	9.5	11	279	2	0.9	1.5	0.7	13.5	60	10	44
10	5.3	30	3/8	9.5	11	279	3	1.4	1.5	0.7	18	80	10	44
8	8.4	50	3/8	9.5	11	279	4.5	2.0	3	1.4	20.5	90	10	44
6	13.3	65	1/2	12.7	11-3/4	298	6.5	2.9	9	4.0	21	94	28	124
4	21.2	85	1/2	12.7	11-3/4	298	10	4.5	10	4.5	30	133	36	160
3	26.7	100	9/16	14.3	12-1/2	318	13	5.9	13	5.9	35	156	42	187
2	33.6	115	9/16	14.3	12-1/2	318	15	6.8	15	6.8	42	186	50	222
1	42.4	130	5/8	15.9	13-1/2	343	19	8.6	19	8.6	53	236	61	271
1/0	53.5	150	5/8	15.9	13-1/2	343	21	9.5	21	9.5	64	285	72	320
2/0	67.4	175	3/4	19.1	14-1/2	368	23	10.4	23	10.4	64	285	78	347
3/0	85	200	3/4	19.1	14-1/2	368	31	14	30	13.6	79	351	97	432
4/0	107	230	3/4	19.1	14-1/2	368	31	14	30	13.6	96	427	116	516
250	127	255	7/8	22.2	16	406	31	14	30	13.6	96	427	116	516
300	152	285	7/8	22.2	16	406	33	15	34	15.4	99	441	116	516
350	177	310	1	25.4	17	432	37	16.8	38	17.2	113	503	129	574
400	203	335	1	25.4	17	432	37	16.8	38	17.2	113	503	129	574
500	253	380	1-1/8	28.6	18-1/4	464	44	20	45	20.4	130	578	154	685
600	304	420	1-1/8	28.6	18-1/4	464	50	22.7	45	20.4	130	578	154	685
700	355	460	1-1/4	31.8	19-1/2	495	50	22.7	48	21.8	145	645	179	796
750	380	475	1-1/4	31.8	19-1/2	495	50	22.7	54	24.5	155	690	179	796
800	405	490	1-3/8	34.9	21-1/4	540	55	25	54	24.5	155	690	179	796
900	456	520	1-3/8	34.9	21-1/4	540	55	25	55	25	158	702	181	805
1000	507	545	1-1/2	38.1	22-1/4	572	55	25	55	25	175	778	199	885
1250	633		1-3/4	44.5	26	660	75	34	75	34	217	965	251	1116
1500	760		2	50.8	28	711	90	41	90	41	264	1174	302	1343
1750	887		2-1/8	54	30	762	99	45	100	45.5	303	1347	342	1521
2000	1010		2-1/8	54	30	762	119	54	120	54.4	342	1521	382	1699

Testing Facilities 检测仪器设备



Thermal Shock Tester Chamber
冷热冲击试验机



X-RAY
膜厚测试仪



Vol-withstand Tester
耐压测试仪



Hardness Tester
硬度测试仪



Temperature Rise Tester
温升测试仪



Automatic Insertion and Withdrawal Tester
自动插拔力机



Torque Meter
数显扭力计



Relay Tester
继电器测试仪



Aging Tester
老化测试机



Constant Temperature and Humidity Tester
恒温恒湿测试机



Oven
烤箱



Rapid Temp. Change Chamber
快速温变试验机



3D-Projector
3D - 投影机



Glow-wire Test Machine
灼热丝燃烧测试仪



Insertion and Withdrawal Tester
荷重测试机



RoHS Tester
环保测试仪



Vibration Testing Machine
振动试验机



Salt Spray Tester
盐雾实验机



Packaging Drop Testing Machine
包装跌落试验机



Tensile Strength Testing Machine
抗拉强度试验机

ANYTEK®

Anytek Electronic Technology (SZ) Co., Ltd.
恩尼特克电子科技（深圳）有限公司

Web Site: <https://www.anytek.com.cn>
<https://www.anytek.com.tw>
E-mail: anytek@anytek.com.cn

Taiwan Taipei

新北市汐止区新台五路一段77号5楼之6
5F-6, No.77, Sec. 1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 22175, Taiwan, R.O.C.
Tel: +886-(0)2-26980366
E-mail: anytek@anytek.com.tw

China Shenzhen Factory

深圳市龙岗区坪地街道中心社区佳乐街10号
No. 10, Jiale Street, Center Community,
Pingdi Street, Longgang District, Shenzhen City, China
工厂电话(Tel): +86-(0)755-84096008
销售电话(Tel): +86-(0)755-89943956/89943965
E-mail: anytek@anytek.com.cn

China Shanghai Office & Factory

上海市浦东新区宁桥路825号5号楼103室
Room 103, 5th Building, No. 825, Ning Qiao Road,
Pu Dong New District, Shanghai City, China
Tel: +86-(0)21-58999106
E-mail: anytek@anytek.com.cn

China Beijing Office

北京市海淀区上地十街1号院4号楼1412室
Room 1412, 4th Building, No. 1 Yard, Shangdi 10th Road,
Haidian District, Beijing City, China
Tel: +86-(0)10-62669285
E-mail: anytek@anytek.com.cn

WARNING:

All the copyrights of this book belong to Anytek Technology Corporation Ltd., and it's prohibited for duplication. Once the duplication has been found, we will suit for law.

NOTE:

The information furnished by ANYTEK has been carefully checked and is believed to be assumed by ANYTEK. For its use, nor for an infringements of patents or other rights of third parties that may result from its use. ANYTEK retains the rights to make changes in the publication without prior notice.