
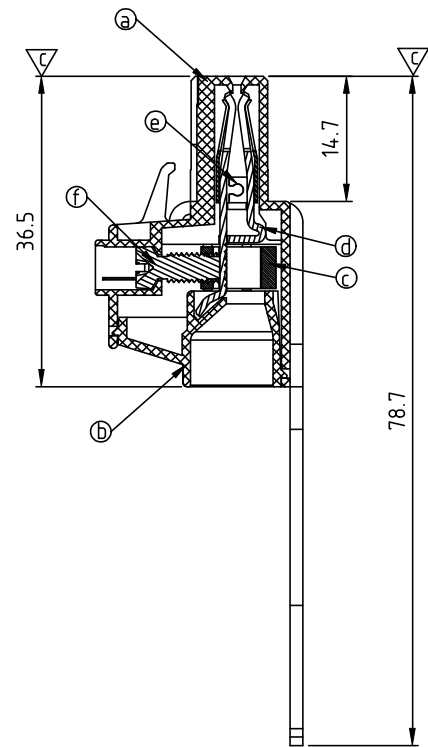


| SIGN                                           | DATE | DESCRIPTION | APPROVER |
|------------------------------------------------|------|-------------|----------|
| △                                              |      |             |          |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |      |             |          |

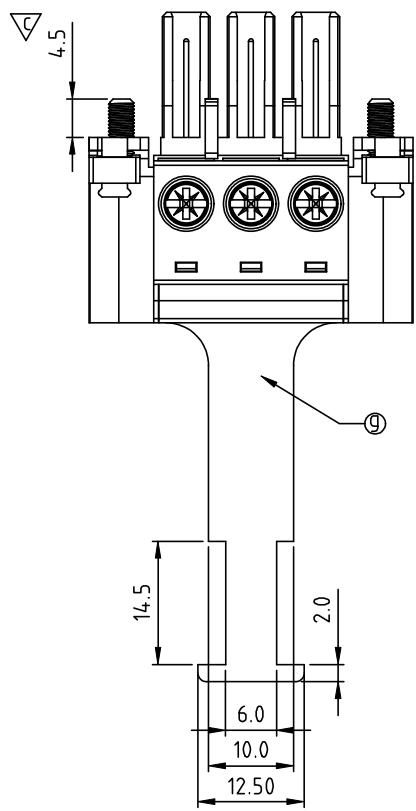


- Material:
- Item ① Terminal(housing): Thermoplastic (UL94V-0)
  - Item ② Terminal(cover): Thermoplastic (UL94V-0)
  - Item ③ Clamp: Brass Ni plated
  - Item ④ Female contact : Copper. Tin plated
  - Item ⑤ Wire guard: Stainless steel
  - Item ⑥ Terminal Screw: Steel , zinc plating "✱" slot type
  - Item ⑦ Steel: Steel t=1.50mm zinc plated.
  - Item ⑧ With flange Screw: Steel Zinc plating M3"+/-" slot type
- Electrical: cULus
- Voltage rating: 600 V
  - Current rating: 41 A
  - Wire range:
  - Solid wire(AWG): 8-24
  - Stranded wire(AWG): 8-24
  - Torque: 9 LB-In
  - Screw: M3.5
  - Wire strip length: 10-11 mm
  - Withstanding Voltage: 2.2KV
  - Operating temperature: -40°C to +115°C
  - Safety Approval: cULus
  - Critical dimension: △

E T 03 0 2 x D xxxx G

G RoHS compliant (lead<4%)  
In copper Alloy  
0000: "@ " Logo (Standard)  
000A: "ANYTEK" Mark  
Any special item by customer request, please contact sales department.

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)


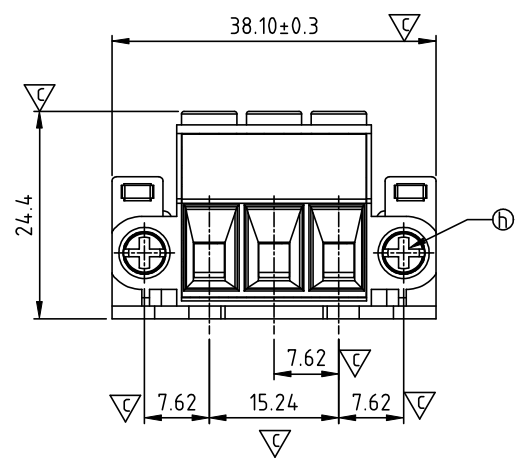


**ANYTEK**

**CUSTOMER COPY**  
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                                            |                     |                     |              |             |            |           |
|----------|------------------------------------------------------------|---------------------|---------------------|--------------|-------------|------------|-----------|
| TITLE    | ET-7.62 3P W/Flange & With handle Series (Match KT series) |                     |                     |              |             |            |           |
| PART NO. | ET0302xDxxxxG                                              |                     |                     | DWG NO.      | 8ET0034     |            |           |
| APPROVED | CHECKED                                                    | DESIGNED            | DRAWN               | CUST NO.     |             |            | Tolerance |
|          |                                                            | Chen Bo<br>03/28`13 | Chen Bo<br>03/28`13 |              | UNIT: mm    | X. ±0.50   |           |
|          |                                                            |                     |                     | SHEET: 01/01 | SCALE: NONE | X.X ±0.30  |           |
|          |                                                            |                     |                     |              | REV.: B     | X.XX ±0.10 |           |
|          |                                                            |                     |                     |              |             | X° ±1°     |           |

| SIGN                                            | DATE | DESCRIPTION | APPROVER |
|-------------------------------------------------|------|-------------|----------|
| △                                               |      |             |          |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALL Y!!! |      |             |          |

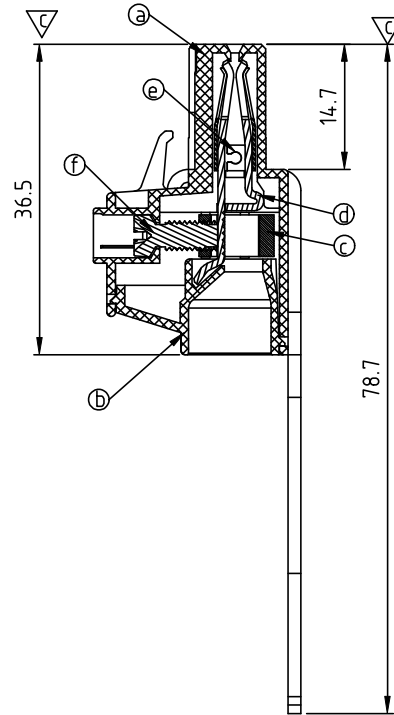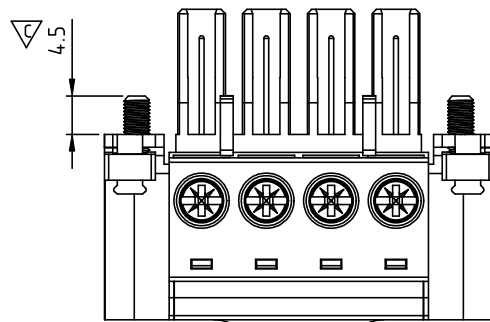

- Material:
- Item a Terminal(housing): Thermoplastic (UL94V-0)
  - Item b Terminal(cover): Thermoplastic (UL94V-0)
  - Item c Clamp: Brass Ni plated
  - Item d Female contact : Copper. Tin plated
  - Item e Wire guard: Stainless steel
  - Item f Terminal Screw: Steel , zinc plating " \* " slot type
  - Item g Steel: Steel t=1.50mm zinc plated.
  - Item h With flange Screw: Steel Zinc plating M3"+/-" slot type


- Electrical:
- cULus
- Voltage rating: 600 V
  - Current rating: 41A
  - Wire range:
  - Solid wire(AWG): 8-24
  - Stranded wire(AWG): 8-24
  - Torque: 9 LB-In
  - Screw: M3.5
  - Wire strip length: 10-11 mm
  - Withstanding Voltage: 2.2KV
  - Operating temperature: -40°C to +115°C
  - Safety Approval: cULus
  - Critical dimension: △

E T 04 0 2 x D xxxx G

G RoHS compliant  
(lead<4%)  
In copper Alloy  
0000: "@" Logo (Standard)  
000A: "ANYTEK" Mark  
Any special item by  
customer request.  
please contact sales  
department.

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

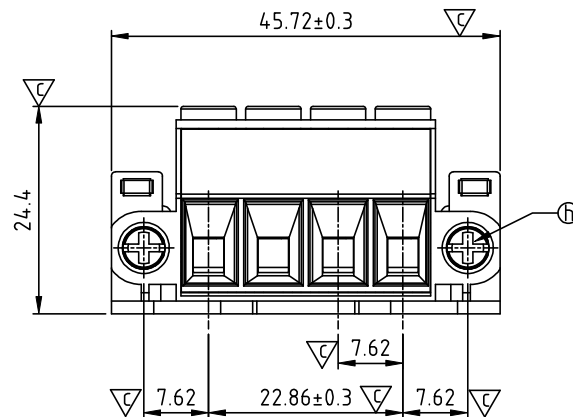

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                                          |                     |                     |              |             |            |           |
|----------|----------------------------------------------------------|---------------------|---------------------|--------------|-------------|------------|-----------|
| TITLE    | ET-7.62 4P W/Flange With handle Series (Match KT series) |                     |                     |              |             |            |           |
| PART NO. | ET04.02xDxxxxG                                           |                     |                     | DWG NO.      | 8ET0033     |            |           |
| APPROVED | CHECKED                                                  | DESIGNED            | DRAWN               | CUST NO.     |             |            |           |
|          |                                                          | Chen Bo<br>03/28'13 | Chen Bo<br>03/28'13 |              | UNIT: mm    | Tolerance  |           |
|          |                                                          |                     |                     |              | SCALE: NONE | X. ±0.50   | X.X ±0.30 |
|          |                                                          |                     |                     | SHEET: 01/01 | REV. B      | X.XX ±0.10 | X° ±1°    |