




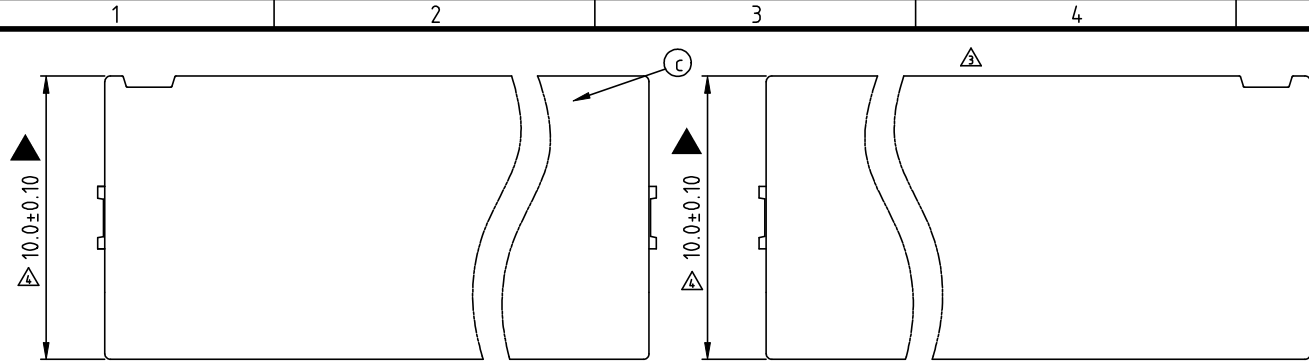


進膠黏工藝缺口A

進膠黏工藝缺口B

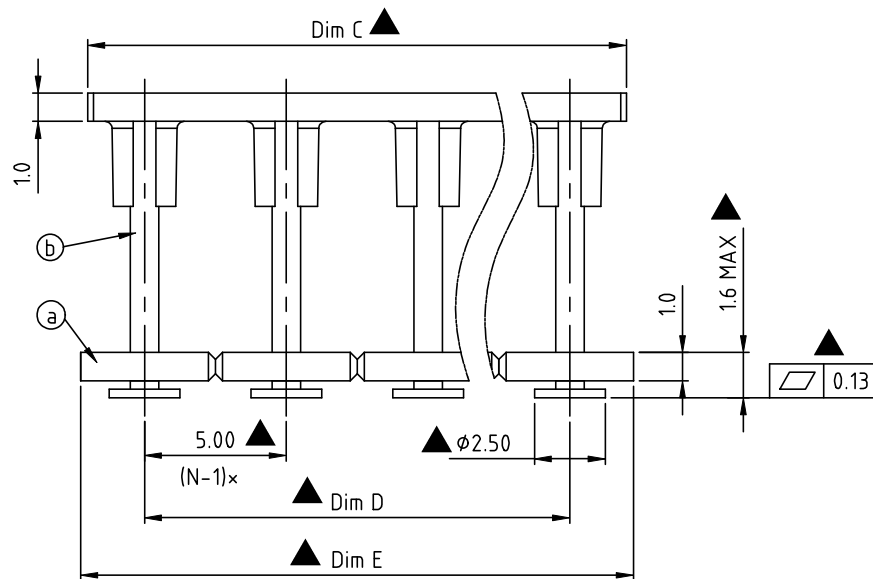

N=Number of Poles

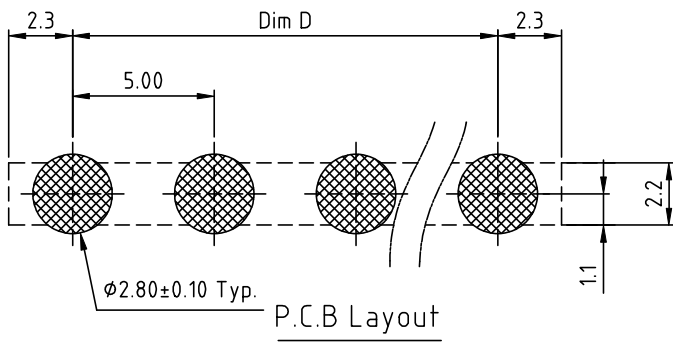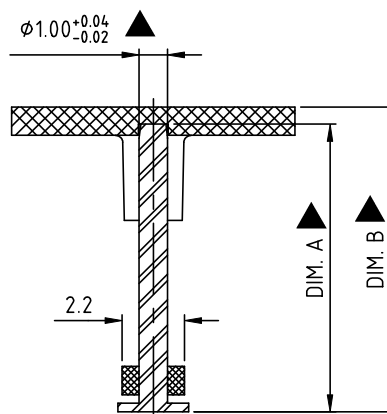

P.C.B Layout

DIM. C = N×5.0-1.0
DIM. D = (N-1)×5.0
DIM. E = N×5.0-0.5

POLES	DIM. C	DIM. D	DIM. E
2P-3P	±0.15	±0.10	±0.15
4P-7P	±0.20	±0.20	±0.20
8P-12P	±0.25	±0.25	±0.25

TYPE	DIM. A	DIM. B
TYPE #1	10.15mm	10.75mm
TYPE #2	10.40mm	11.00mm
TYPE #3	15.50mm	16.10mm
TYPE #4	14.20mm	14.80mm

Rev	SIGN	DATE	DESCRIPTION	APPROVER
C	△	05/15'12	PART NO,is changed	Chen Bo
D	△	08/05'13	add the safety certification icon	Chen Bo
E	△	2017.6.29	add the view	CHENMING
F	△	2023.7.13	The Dimension is changed from:10.0 to 10.0±0.10	Seamus
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

NOTE:

- Item ③ Insulator(housing): High temp. polyamide(UL94V-0)
- Item ④ Terminal Body: Brass
- Item ⑤ Cover: High temp. polyamide(UL94V-0)

Electrical:

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -45°C to +65°C
- Soldering temperature: 260°C/10 Sec max
- Safety Approval: cULus
- Critical dimension: ▲

△ FW xx 0 x x x xxxx G

NO. OF POLES
02: 2 POLES
03: 3 POLES
" " " "
12 12 POLES

PIN TYPE

- 0: L=10.15mm
- 1: L=10.40mm
- 2: L=15.50mm
- 3: L=14.20mm

PLATED

- 0: Tin
- 2: G/F

G RoHS compliant
(lead<4%)
In copper Alloy

0000: (Standard)
Any special item by
customer request.
please contact sales
department.

Packaging

- 0: T&R Packing
- 1: T/B Packing

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		FW 5.0mm Series 2P-12P							
PART NO.	FWxx0xxxxxxG			DWG NO.	8FW0001				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Seamus 2023.7.13	Seamus 2023.7.13		UNIT: mm		X.	±0.50	
					SCALE: NONE		X.X	±0.30	
							X.XX	±0.10	
				SHEET: 01/01	REV.: F		X°	±1°	