

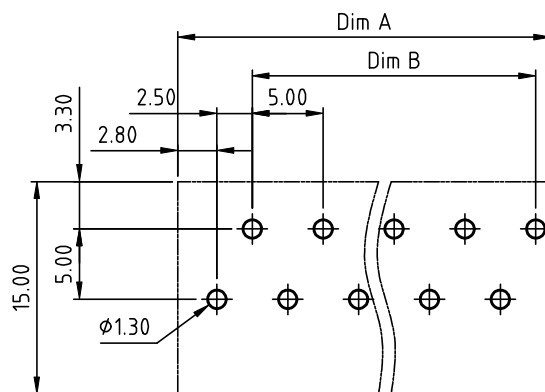
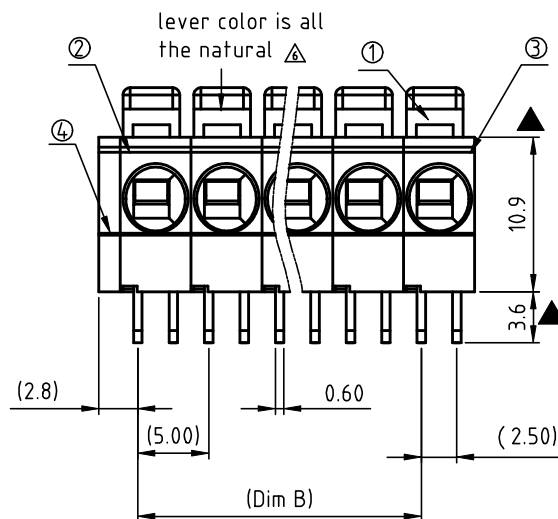


RoHS Compliant

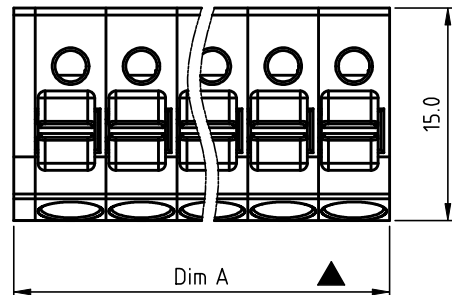

N=NUMBER OF POLES

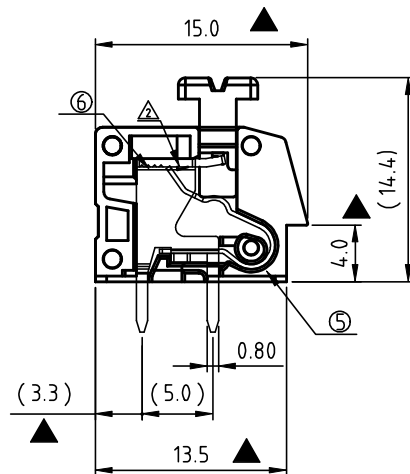

DIM		TOL			
		2P--6P	7P--12P	13P--18P	19P--24P
Dim A	N×5.0+1.50	±0.15	±0.20	±0.30	±0.40
Dim B	(N-1)×5.0				

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	△	08/24'12	Change the dwg no 8H60104 to 8H60601	Da cheng
C	△	11/11'13	change the structure & update the drawing	Da cheng
D	△	2019.11.20	Add the Rohs Compliant & Amphenol Logo.	Guoxue
	△	2019.11.20	Delete VDE&cULus	Guoxue
	△	2019.11.20	Add the "Wave Soldering temperature: 260°C ±5°C/5 Sec"	Guoxue
	△	2019.11.20	Add the lever color & Update the drawing	Guoxue
	△	2019.11.20	Delete the Dim.B Tol. & Add the Refence dimension.	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material: △ ● Item ① Lever: Thermoplastic (UL94V-0) △
● Item ② Terminal body: Thermoplastic (UL94V-0)
● Item ③ Terminal side body: Thermoplastic (UL94V-0)
● Item ④ cover: Thermoplastic (UL94V-0)
● Item ⑤ Spring clamp: Stainless steel
● Item ⑥ contact pin: Brass.Tin plated

Electrical: △

- Voltage rating: 300 V
- Current rating: 11 A
- Wire range:
- Solid wire(AWG): 12-20
- Stranded wire(AWG): 12-20
- Wire strip length: 10-11 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Wave Soldering temperature: 260°C ±5°C/5 Sec
- Safety Approval: △
- Critical dimension: △
- △ ● Reference dimension: (×)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

RoHS compliant (lead<4%)
In copper Alloy
0000: "△" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request, please contact sales department.

H6 xx 0 0 x 0 xxxx G
No. OF POLES
02: 2 POLES
24: 24 POLES
△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		H6 5.0mm Series (Round hole)			
PART NO.	H6xx00x0xxxxG			DWG NO.	8H60601 △
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2019.11.20	Guoxue 2019.11.20		Tolerance
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: D	X° ±1°