

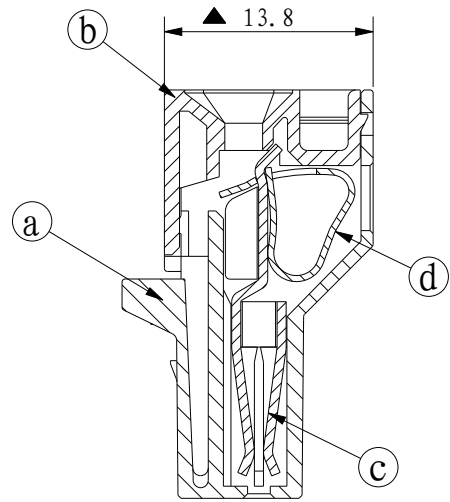
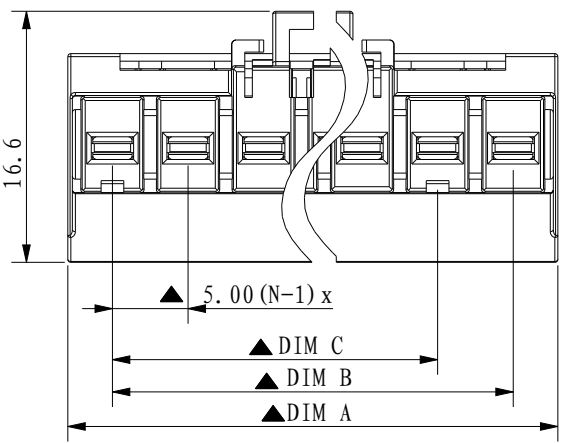
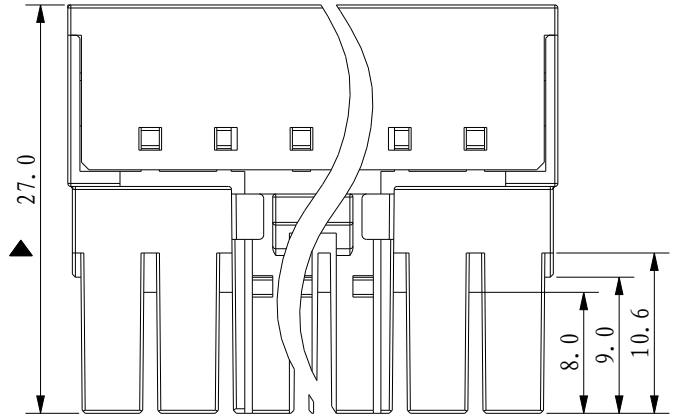


ROHS Compliant

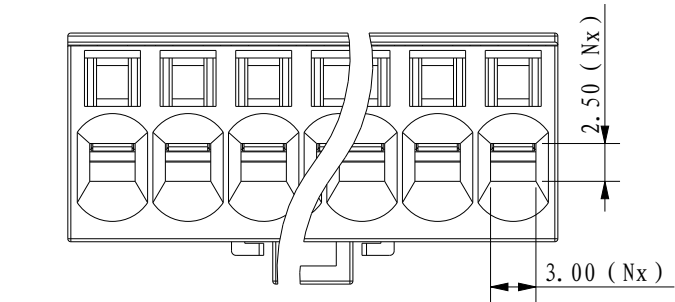

A-A

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	07/01/20'	The first release	Johnson
C	①	09/14/20'	Add the cULus Mark	Johnson
THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!				

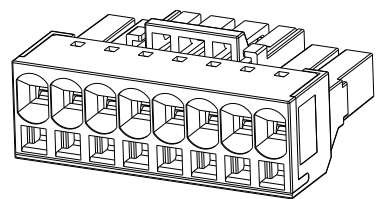

Material:

ITEM: ① HOUSING: PBT UL94V-0
ITEM: ② COVER: PBT UL94V-0
ITEM: ③ CONTACT: High-conductivity Copper
Au G/F on contact area, other area Tin plated
ITEM: ④ Spring: Stainless steel
ELECTRICAL: cULus
Voltage Rating: 300 V
Current Rating: 15A (Str) 13A (Sol)
Solid wire (AWG): 14-18
Stranded wire (AWG): 14-18
Wire Strip Length: 9-10mm
Contact Resistance: 2 mΩ Max
Withstanding Voltage: 1.6KV
Operating Temperture: -40°C TO +140°C
CRITICAL DIMENSION: ▲
SAFETY APPROVAL: cULus



Amphenol
ANYTEK

CUSTOMER COPY
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD



TITLE:		HO 5.0 series with lever			
PART NO.	HOxx00x0xxxxG			DWG NO.	8H00001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Johnson	Johnson		
		2022. 05. 05	2020. 09. 14	SHEET: 1 / 3	

TOLERANCE		2P-4P	5P-8P	9P-12P
DIM A=(N-1)*5+5.9		±0.15	±0.25	±0.30
DIM B=(N-1)*5				
DIM C=(N-2)*5				


UNIT: mm		Tolerance
SCALE: 2: 1		
REV.: C		X. ±0.5 X.X ±0.3 X.XX ±0.1 X° ±1°

ROHS Compliant


P/N: AB0000x00000G




Handle (one plug with one handle))




2P




3P



4P

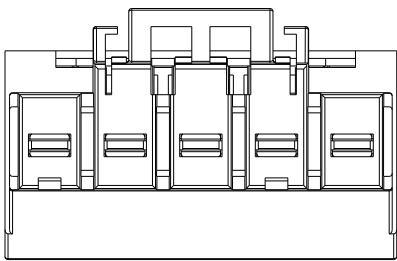

5P

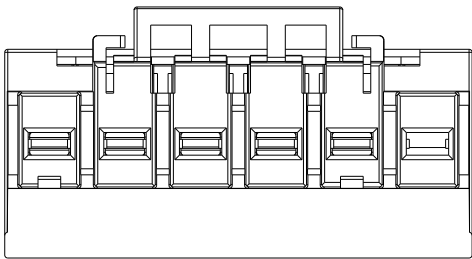

6P

HO xx 0 0 x 0 xxxx G

No. OF POLES
02: 2 poles
03: 3 poles
: :
12: 12 poles


Body color
0 Black (RAL9005)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)

0000: "A" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request please contact sales department.


RoHS compliant
(lead<4%)
In copper Alloy

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD					
TITLE:	HO 5.0 series with lever								
PART NO.	HOxx00x0xxxxG			DWG NO.	8H00001				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Johnson	Johnson			UNIT: mm		X.	± 0.5
		2022. 05. 05	2020. 09. 14			SCALE: 2: 1		X. X	± 0.3
				SHEET: 2 / 3		REV.: C		X. XX	± 0.1
								X°	± 1°


ROHS Compliant

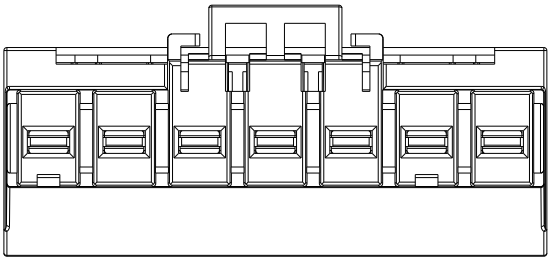


7P

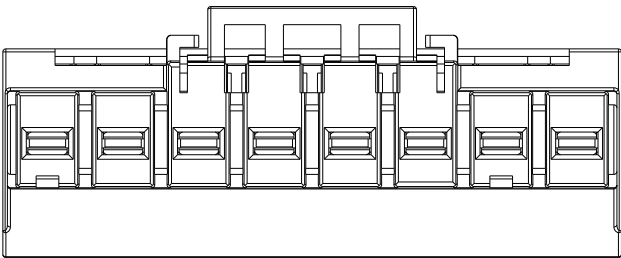


8P

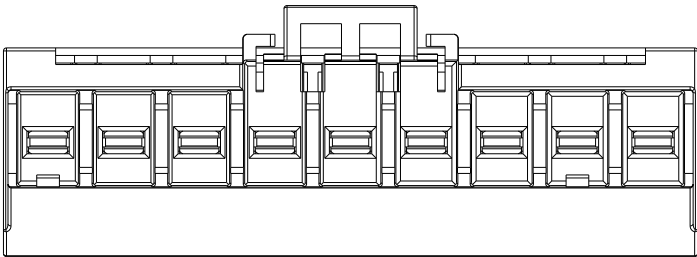


9P

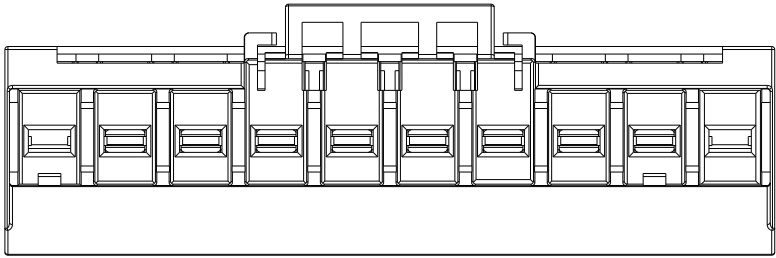

10P

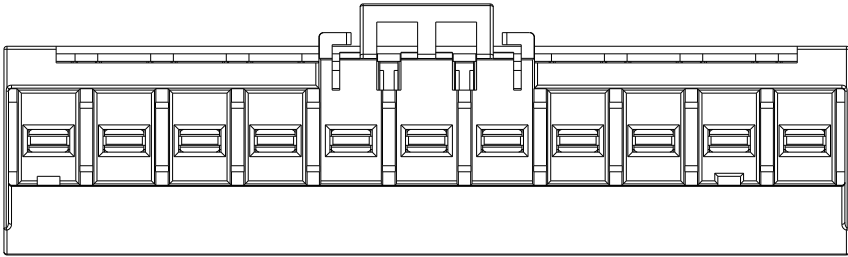

11P

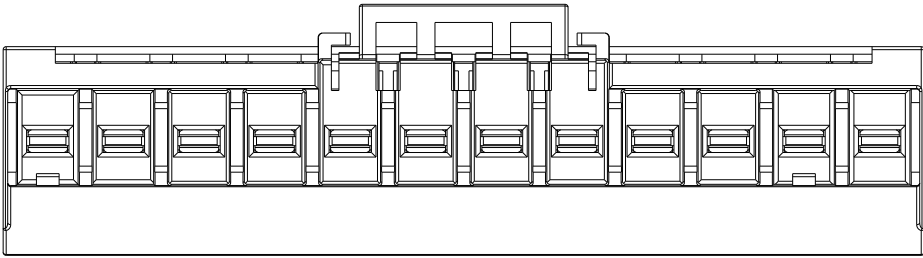

12P

Amphenol ANYTEK				CUSTOMER COPY				
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD				
TITLE:	HO 5.0 series with lever							
PART NO.	HOxx00x0xxxxG			DWG NO.	8H00001			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Johnson	Johnson			UNIT: mm	X. ± 0. 5	
		2022. 05. 05	2020. 09. 14			SCALE: 2: 1	X. X ± 0. 3	
				SHEET: 3 / 3		REV.: C	X. XX ± 0. 1	
							X° ± 1°	