

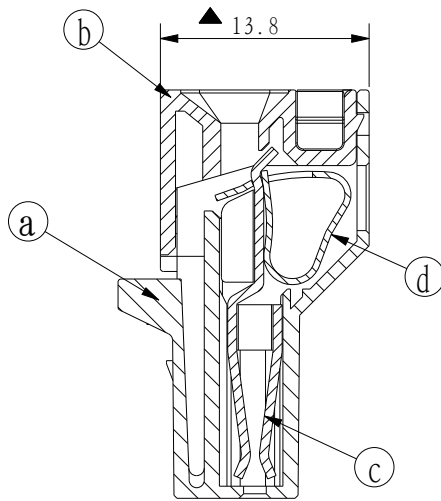
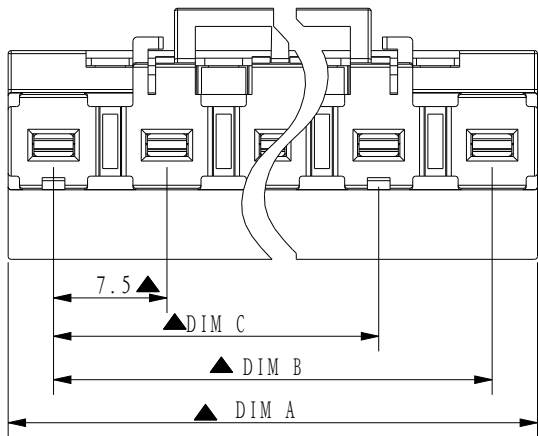
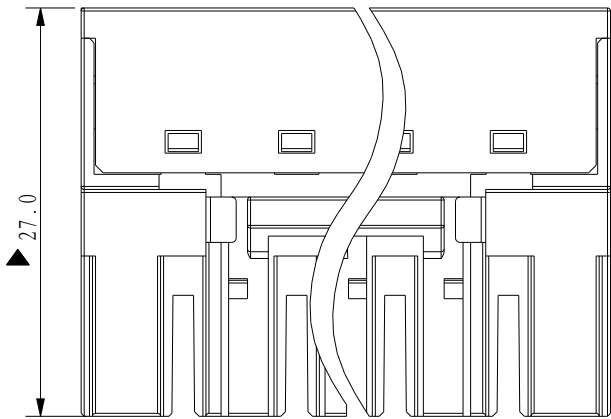


ROHS Compliant

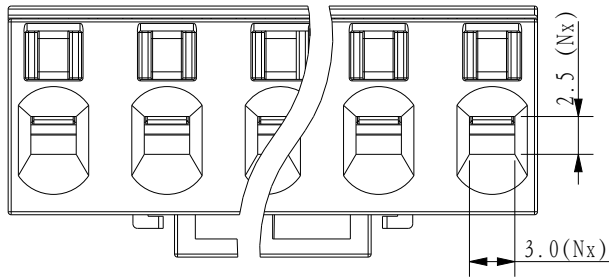

A-A

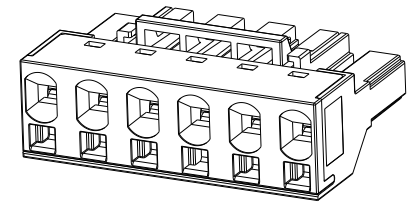

Material:

ITEM: ① HOUSING: PBT UL94V-0
ITEM: ② COVER: PBT UL94V-0
ITEM: ③ CONTACT: High-conductivity Copper
Au G/F on contact area, other area Bright Tin plated over Nickel plated
ITEM: ④ Spring: Stainless steel
ELECTRICAL: cULus
Voltage Rating: 300 V
Current Rating: 15A (Str) 13A (Sol)
Solid wire (AWG): 14-18
Stranded wire (AWG): 14-18
Wire Strip Length: 9-10mm
Contact Resistance: 2 mΩ Max
Withstanding Voltage: 1.6KV
Operating Temperature: -40°C TO +140°C
CRITICAL DIMENSION:
SAFETY APPROVAL: us



N=poles

TOLERANCE	2P-4P	5P-8P	9P-12P
DIM A= (N-1) *7.5+6	±0.20	±0.30	±0.40
DIM B= (N-1) *7.5			
DIM C= (N-2) *7.5			


Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE:	HO 7.5 series with lever			DWG NO.	8HO1001		
PART NO.	HOxx20x0xxxxG			DWG NO.	8HO1001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Johnson	Johnson				Tolerance
		2020.09.14	2020.09.14				X. ±0.5
							X.X ±0.3
							X.XX ±0.1
							X° ±1°

ROHS Compliant


P/N: AB0000X00000G




Handle(one plug with one handle),




2P




3P

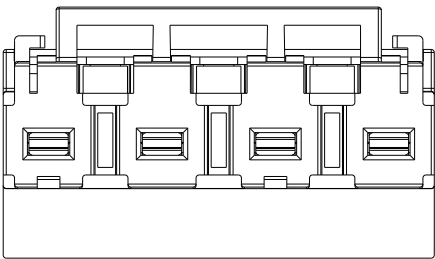

4P

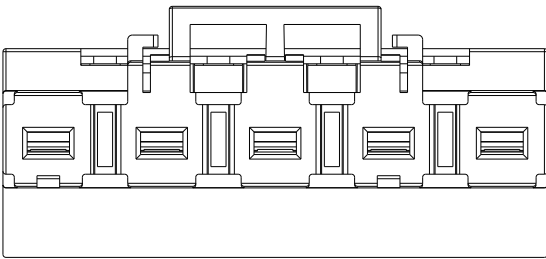

5P

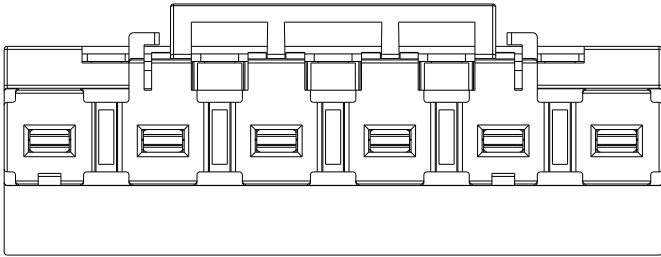


6P


H0	xx	2	0	x	0	xxxx	G	
No. OF POLES		Body color		RoHS compliant (lead<4%)			In copper Alloy	
02: 2 poles		0	Black (RAL9005)	0000: "@" Logo (Standard)				
03: 3 poles		3	Orange (RAL2011/P)	000A: "ANYTEK" Mark				
:	:	4	Yellow (RAL1018/A)	Any special item bycustomer				
12: 12 poles		5	Green (RAL6018/T)	requestplease contact				
		6	Blue (RAL5015/A)	sales department.				
		8	Grey (RAL7035/D)					
		9	White (RAL1102)					

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD		
TITLE:	HO 7.5 series with lever					
PART NO.	HOxx20x0xxxxG			DWG NO.	8H01001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Johnson	Johnson	UNIT: mm		Tolerance
		2020. 09. 14	2020. 09. 14			SHEET: 2 / 3
						X. ±0. 5 X. X ±0. 3 X. XX ±0. 1 X° ±1°


ROHS Compliant

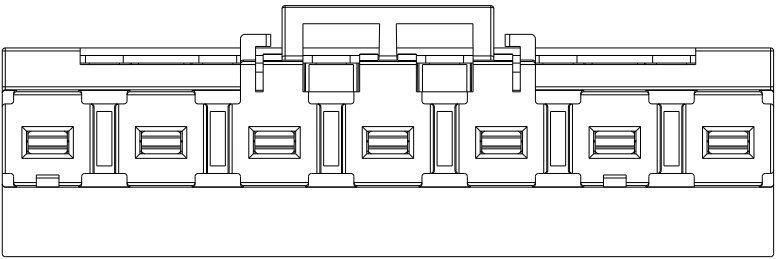


7P

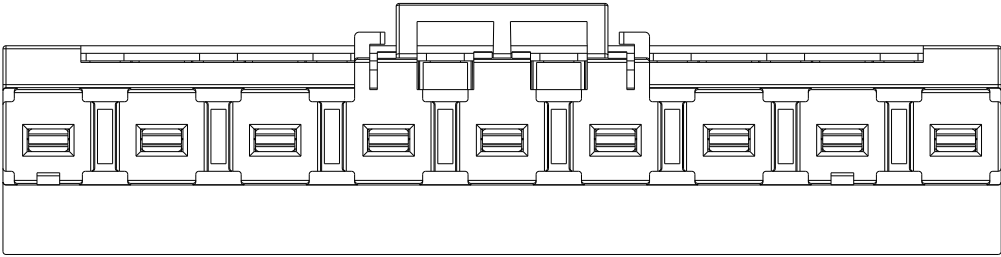


9P

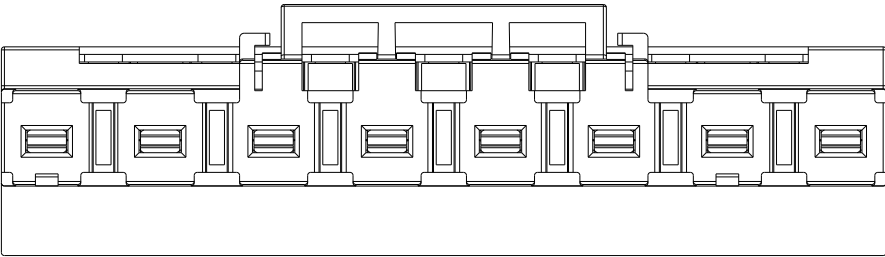


8P

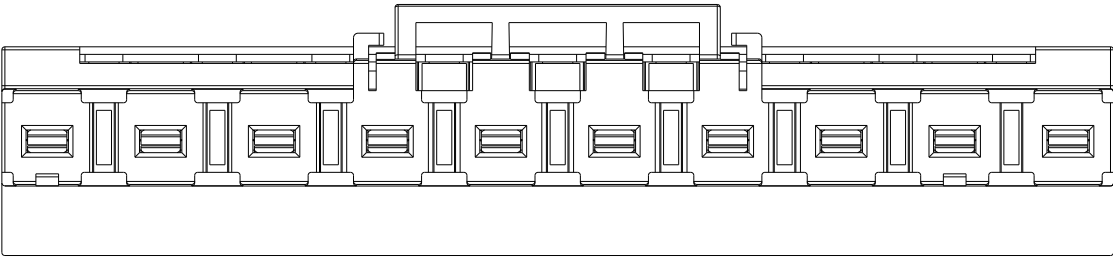

10P

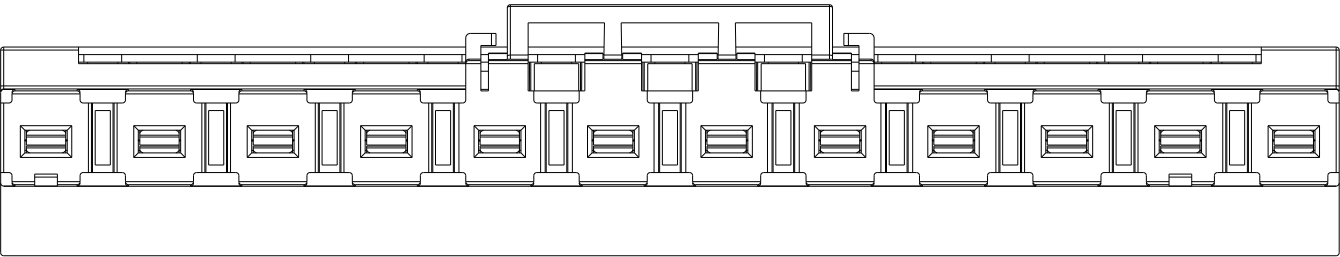

12P

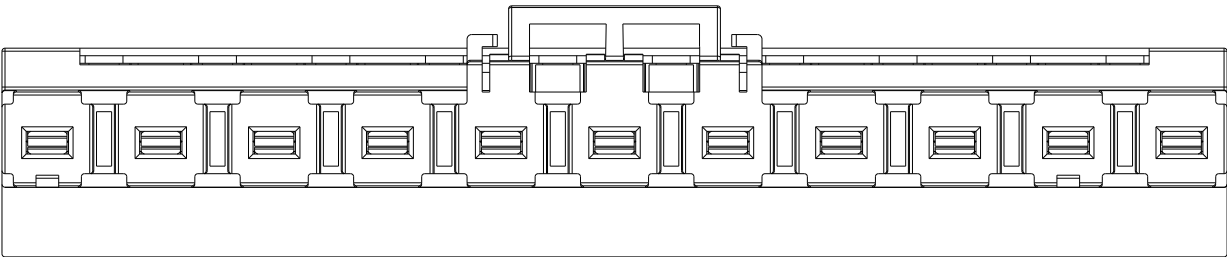

11P

Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE:	HO 7.5 series with lever						
PART NO.	HOxx20x0xxxxG			DWG NO.	8HO1001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Johnson	Johnson				
		2020. 09. 14	2020. 09. 14			SHEET: 3 / 3	
						REV.: C	X. XX ± 0. 1
							X° ±1°