

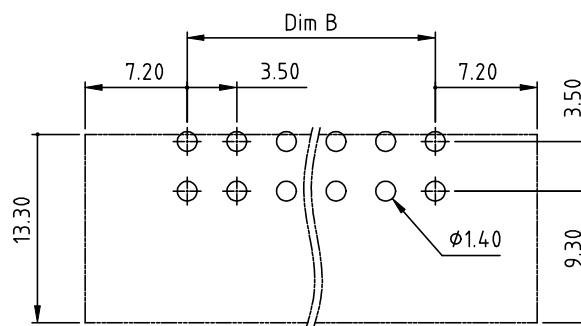
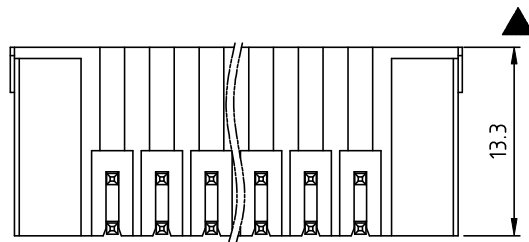
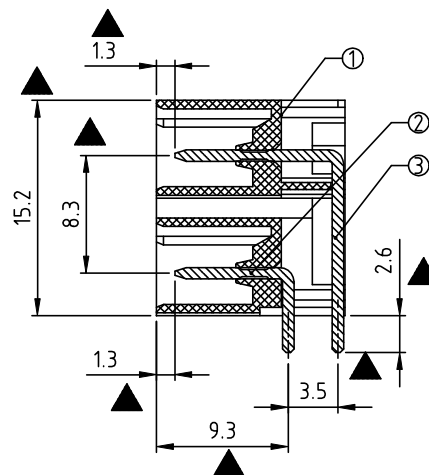


RoHS Compliant

SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

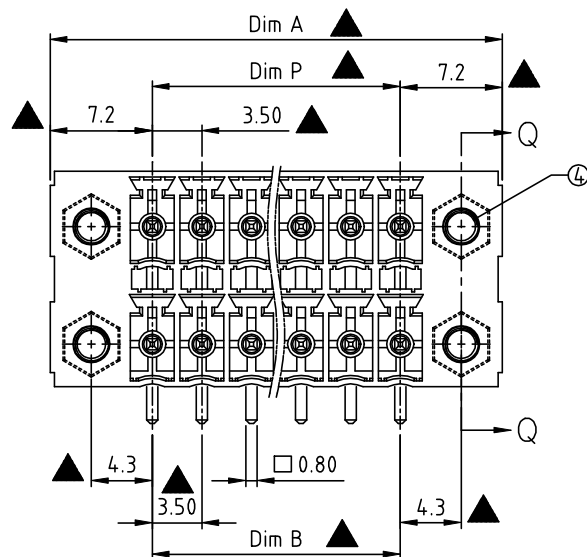

PCB Layout

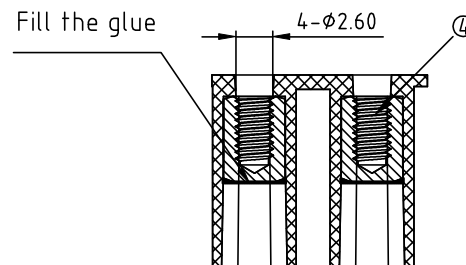

SECTION Q-Q

N=NUMBER OF POLES

DIM		TOL		
		2×2P--2×6P	2×7P--2×12P	2×13P--2×16P
Dim A	$(N/2-1) \times 3.5 + 14.4$	±0.15	±0.20	±0.25
Dim B	$(N/2-1) \times 3.5$			
Dim P	$(N/2-1) \times 3.5$			

Material:

- Item ① Terminal(housing): High temp. polyamide (UL94V-0)
- Item ② Contact pin of short: COPPER Tin plated
- Item ③ Contact pin of long: COPPER Tin plated
- Item ④ Flange screw NUT: Brass M 2.5

Electrical:

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +110°C
- Reflow Soldering temperature: 260°C/10 Sec. Max.
- APPROVAL: 
- Critical dimension: 

KE xx 1 B x 1 xxxx G

No. OF POLES

04: 2×2 POLES

06: 2×3 POLES

⋮

32: 2×16 POLES

COLOR

0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)


000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 3.5mm With Flange Series (90°-Right angle) THR type						
PART NO.	KExx1Bx1xxxxG			DWG NO.	8KE0428		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Guoxue 2019.11.07	Guoxue 2019.11.07		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X°	±1°
				SHEET: 01/01	REV.: B		