

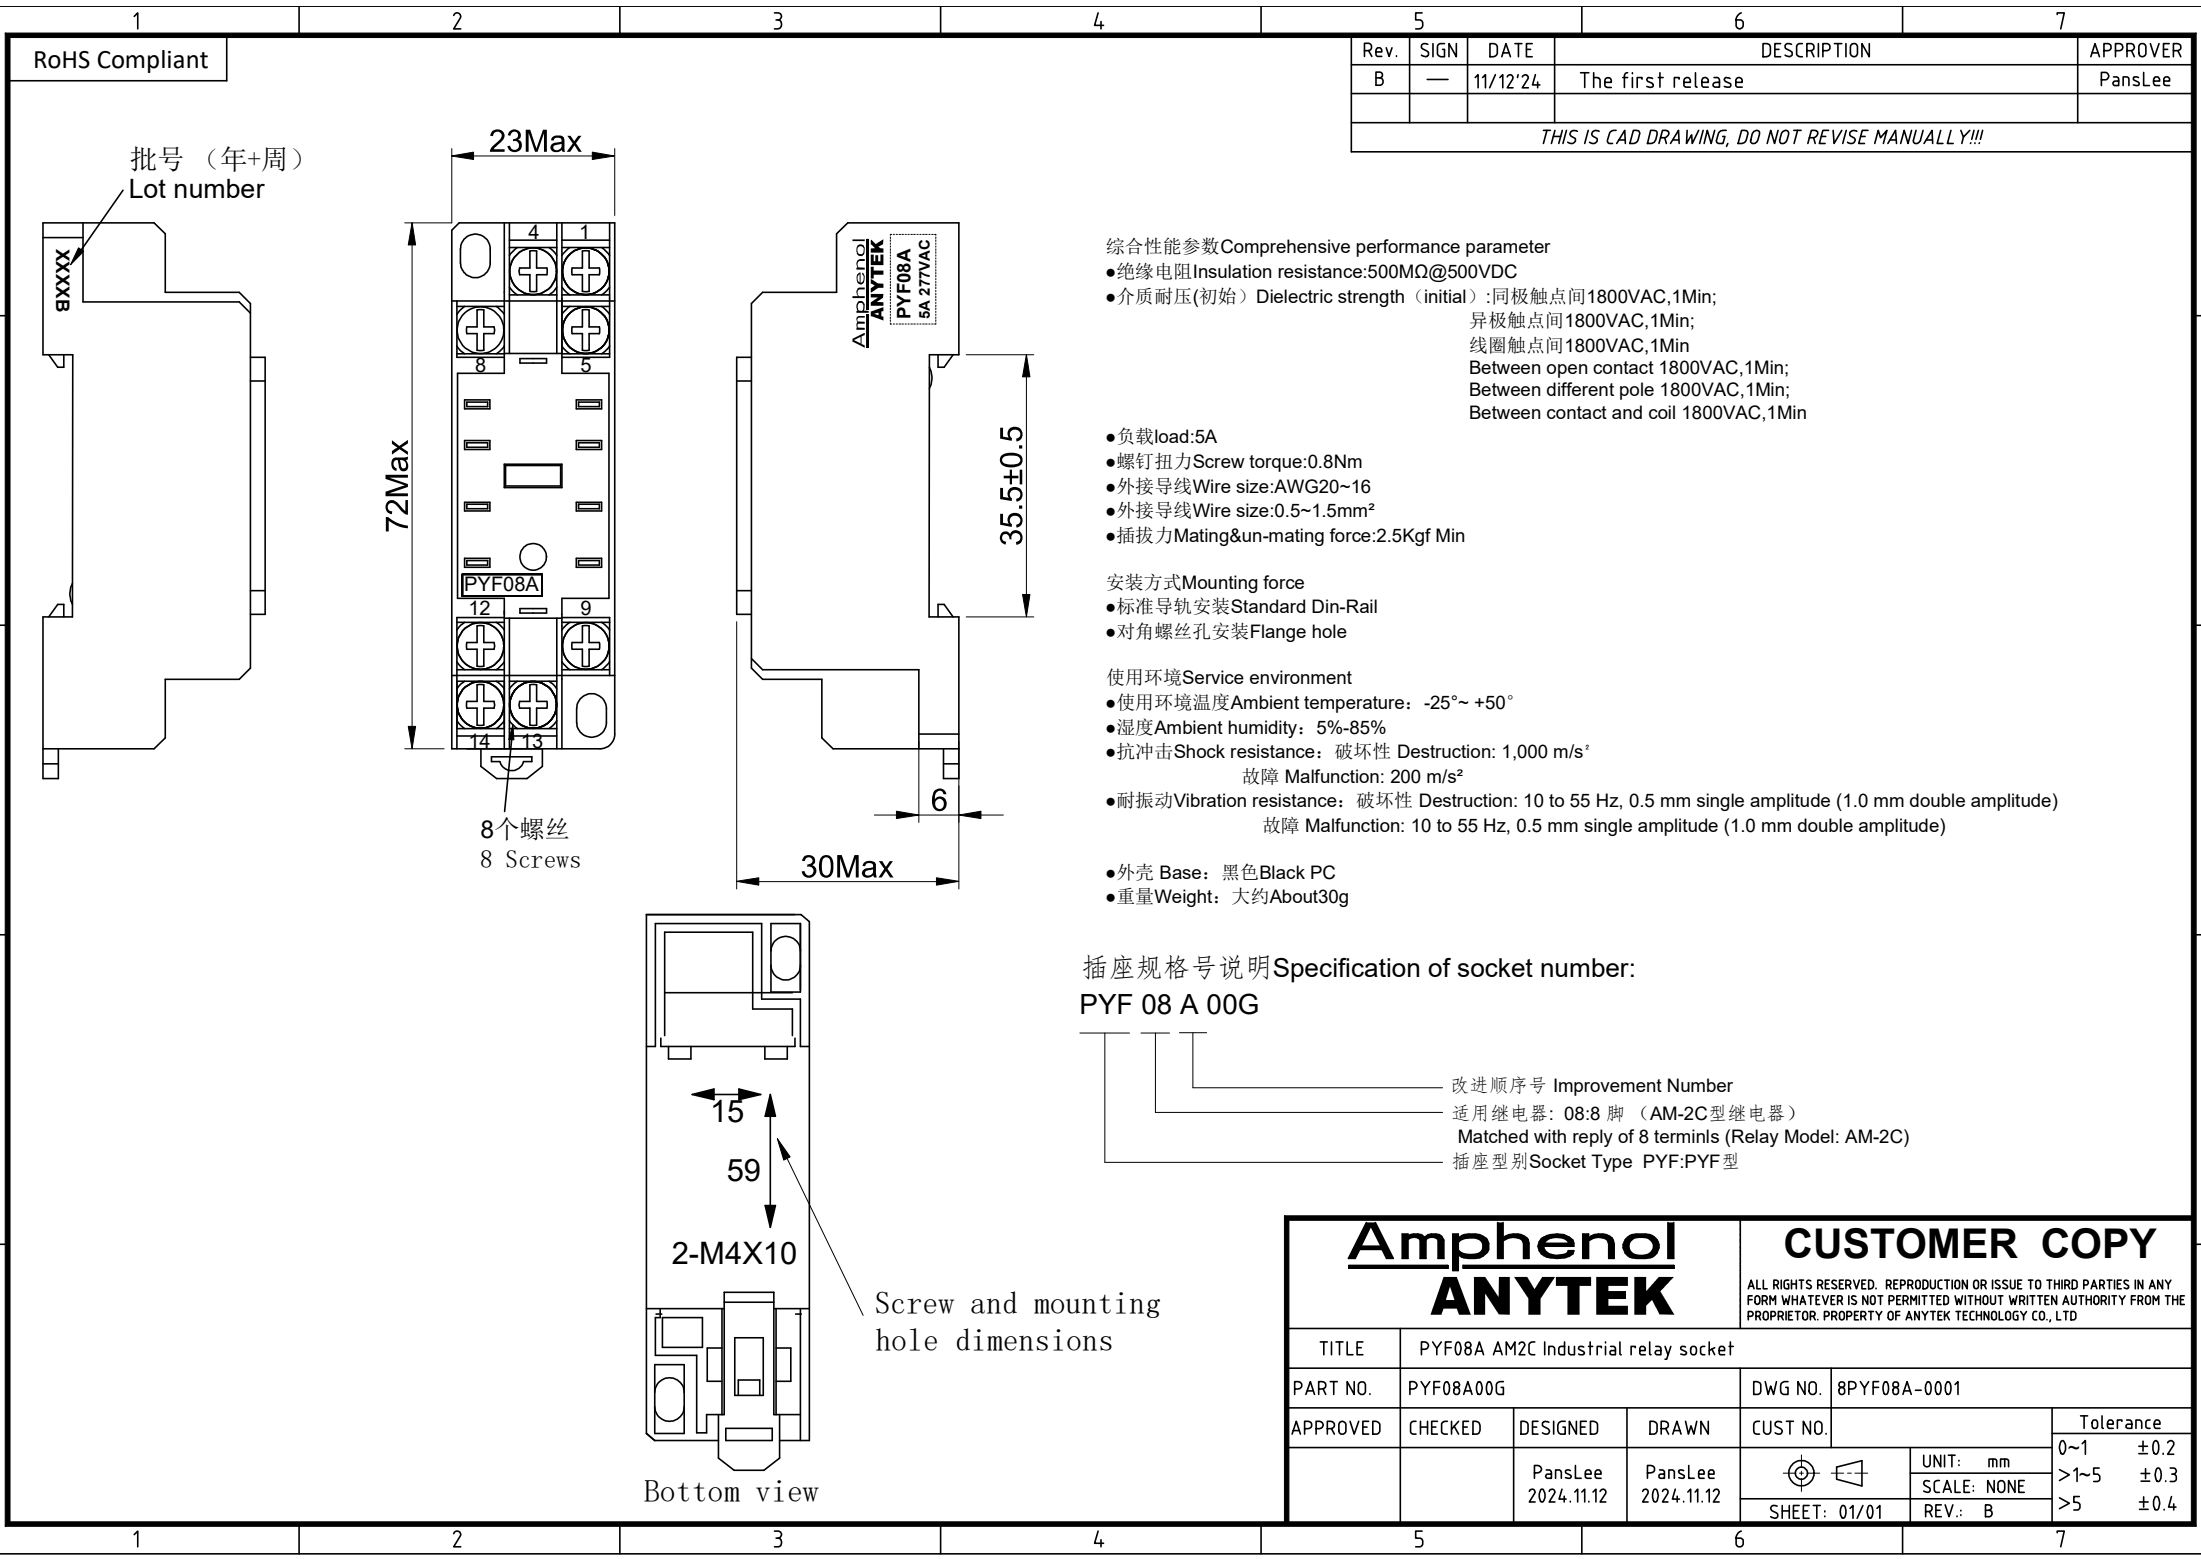



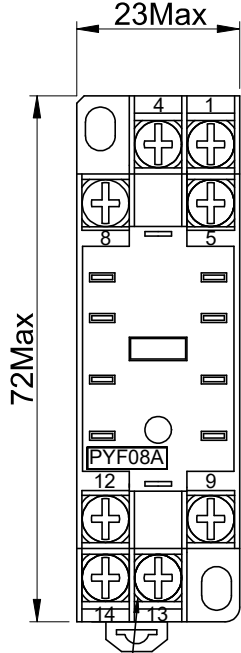


RoHS Compliant

批号 (年+周)
Lot number

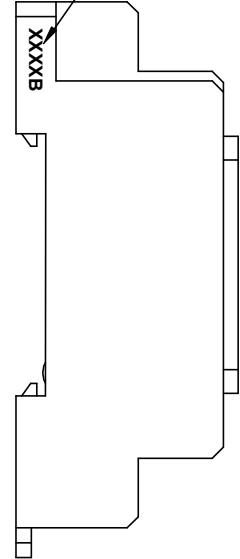

8个螺丝
8 Screws

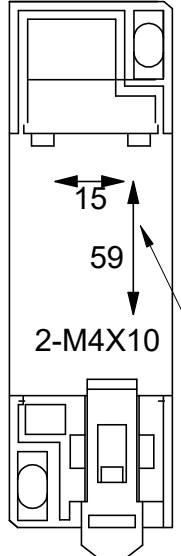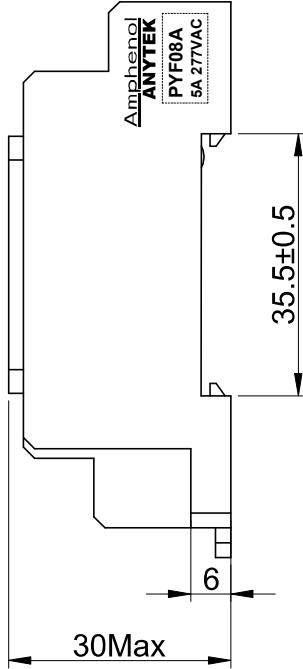

Bottom view

Screw and mounting
hole dimensions

综合性能参数 Comprehensive performance parameter

- 绝缘电阻 Insulation resistance: 500MΩ@500VDC
- 介电耐压 (初始) Dielectric strength (initial): 同极触点间 1800VAC, 1Min;
异极触点间 1800VAC, 1Min;
线圈触点间 1800VAC, 1Min;
Between open contact 1800VAC, 1Min;
Between different pole 1800VAC, 1Min;
Between contact and coil 1800VAC, 1Min

- 负载 load: 5A
- 螺钉扭力 Screw torque: 0.8Nm
- 外接导线 Wire size: AWG20~16
- 外接导线 Wire size: 0.5~1.5mm²
- 插拔力 Mating & un-mating force: 2.5Kgf Min

安装方式 Mounting force

- 标准导轨安装 Standard Din-Rail
- 对角螺丝孔安装 Flange hole

使用环境 Service environment

- 使用环境温度 Ambient temperature: -25° ~ +50°
- 湿度 Ambient humidity: 5%~85%
- 抗冲击 Shock resistance: 破坏性 Destruction: 1,000 m/s²
故障 Malfunction: 200 m/s²
- 耐振动 Vibration resistance: 破坏性 Destruction: 10 to 55 Hz, 0.5 mm single amplitude (1.0 mm double amplitude)
故障 Malfunction: 10 to 55 Hz, 0.5 mm single amplitude (1.0 mm double amplitude)

- 外壳 Base: 黑色 Black PC
- 重量 Weight: 大约 About 30g

插座规格号说明 Specification of socket number:

PYF 08 A 00G

- 改进顺序号 Improvement Number
- 适用继电器: 08:8 脚 (AM-2C型继电器)
Matched with reply of 8 terminals (Relay Model: AM-2C)
- 插座型别 Socket Type PYF:PYF型

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	PYF08A AM2C Industrial relay socket						
PART NO.	PYF08A00G			DWG NO.	8PYF08A-0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		PansLee 2024.11.12	PansLee 2024.11.12		UNIT: mm		0~1 ±0.2
					SCALE: NONE		>1~5 ±0.3
				SHEET: 01/01	REV: B		>5 ±0.4