
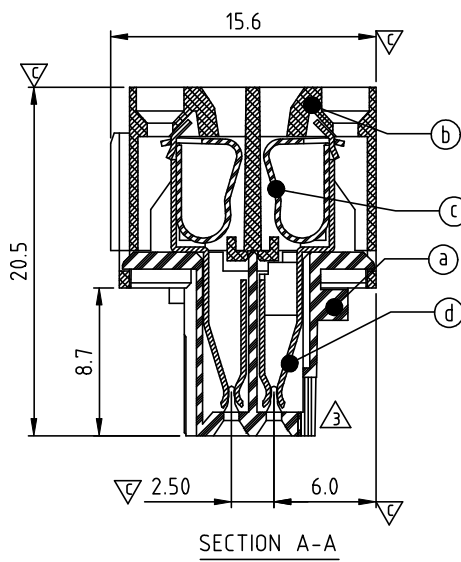
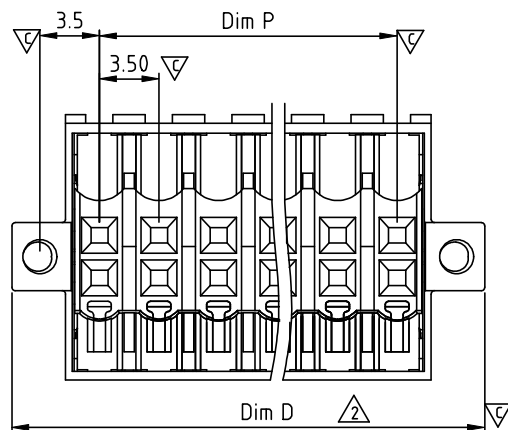
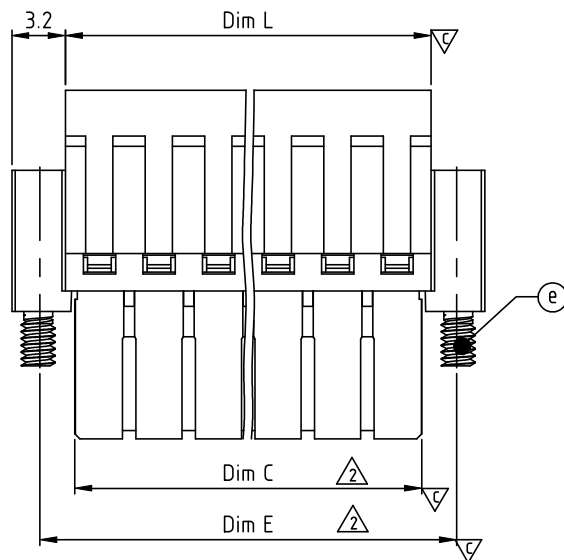


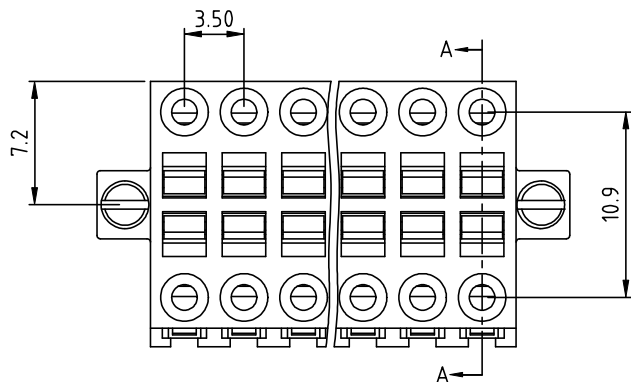

N=Number of poles

△2	Dim L=(N/2-1)×3.5+4.0
△2	Dim P=(N/2-1)×3.5
△2	Dim C=N/2×3.5-0.6
△2	Dim D=(N/2-1)×3.5+10.3
△2	Dim E=(N/2-1)×3.5+7.0

POLES	Dim. Tol	Dim.L	Dim.P	Dim.C	Dim.D	Dim.E
2x2p-2x6p		±0.15	±0.10	+0.0 -0.15	±0.10	±0.15
2x7p-2x12p		±0.25	±0.20	+0.0 -0.20	±0.20	±0.25
2x13p-2x18p		±0.30	±0.25	+0.0 -0.25	±0.25	±0.30
2x19p-2x24p		±0.40	±0.35	+0.0 -0.30	±0.35	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	05/24`11	The cULus is added	Runner
△	05/24`11	The dimension is added	Runner
△	08/20`11	Structure changed	Runner
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item ㉑ Terminal up housing Thermoplastic (UL94V-0)
- Item ㉒ Terminal down housing Thermoplastic (UL94V-0)
- Item ㉓ Spring clamp Stainless steel
- Item ㉔ Female contact PhBz , Tin plated
- Item ㉕ With flange screw steel M2.0 Zinc plated "--" slot type

Electrical

cULus

- Voltage rating: 150V
- Current rating: 7A
- Solid wire(AWG): 18-28
- Stranded wire(AWG): 18-28
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 
- Critical dimension: 

V W xx 1 0 x 1 xxxx G				RoHS
NO of poles				Pb<40,000ppm
04	2x2 CONTACTS	0	Black	0000 Standard @ Logo
06	3x2 CONTACTS	3	Orange	000A Standard ANY Logo
...	...	5	Green	Any special item by customer request,
48	24x2 CONTACTS	6	Blue	please contact sales department.
		8	Grey	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VW 3.5mm Series With flange			
PART NO.	VWxx10x1xxxxG			DWG NO.	8VW0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Runner 2011.08.20	Chen Bo 2011.05.25		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
				SHEET: 01/01	X° ±1°
				UNIT: mm	
				SCALE: NONE	
				REV.: D	