
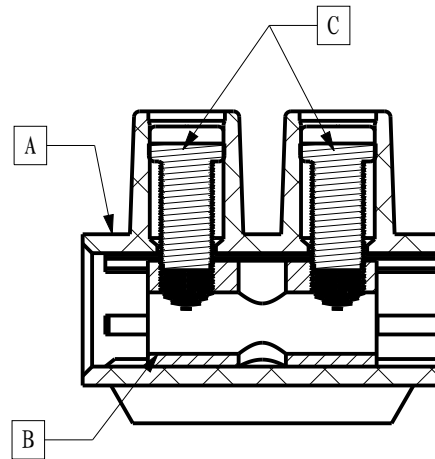
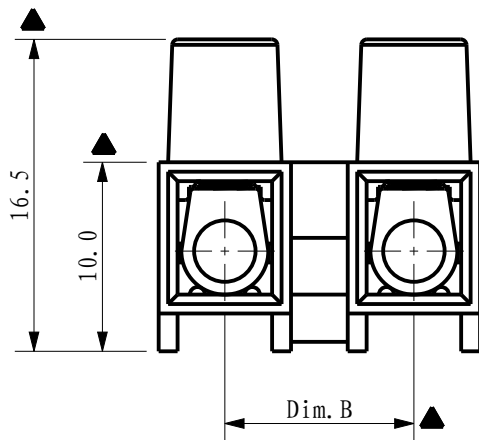


RoHs Compliant

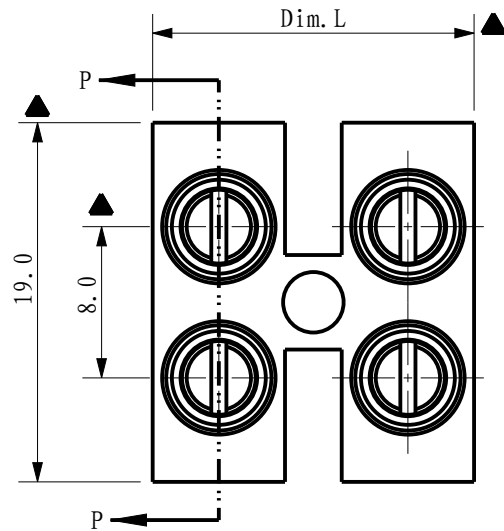

SECTION P-P

N=Number of poles

Dim L	(N-1)x10.0+7.0
Dim B	(N-1)x10.0

Poles	Dim L/B Tol
1P-3P	± 0.20
4P-6P	± 0.30
7P-9P	± 0.40
10P-12P	± 0.50

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		05/22-20	Initial release	Chen Bo
C	Δ	07/16-20	change the torque force from 3.5 to 4.4	Chen Bo
C	Δ	07/16-20	add the note	Chen Bo
C	Δ	09/02-20	add the cULus safety certification icon	Chen Bo
THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

Item A Terminal housing: PA66 (UL94V-0)

Item B Clamp: Brass (CuZn) Ni plated

Item C Terminal screw: Steel Zinc plating "-" slot type

Electrical: cULus

	Group B	Group C	Group D
Δ Voltage rating:	300V (#: 600V)	150V (#: 600V)	300V
Current rating:	30A	30A	10A

Solid wire (AWG): 10-22

Stranded wire (AWG): 10-22

Δ Torque (Lb-In): 4.4

Wire strip length: 5-6mm

Withstanding Voltage: 2.2KV

Operating temperature: -40℃ to +120℃

Δ Safety approval: cULus

Critical dimension: Δ

Δ #: 600V (when mounted on a suitably insulated mounting surface)

		TW		xx	1	1	x	0	xxxx	G	G RoHS compliant (lead<4%) In copper Alloy
No. OF POLES											
01: 1 POLE											
...					Color						
12: 12 POLES	0	Black (RAL9005)							0000	Standard @ Logo	
	2	Red (RAL3001/D)							000A	Standard ANY Logo	
	3	Orange (RAL2011/P)							Any special item by		
	4	Yellow (RAL1018/A)							customer request,		
	5	Green (RAL6018/T)							please contact sales		
	6	Blue (RAL5015/A)							department.		
	8	Grey (RAL7035/D)									
	9	White (RAL1102)									
	C	Green (RAL6018/U)									

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE:	TW 10.0 Series 1-12P						
PART NO.	TWxx11x0xxxxG			DWG NO.	8TW0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo	Chen Bo		UNIT: mm		X. ±0.50
		09/02-20	07/11-19		SCALE: 2.500		X.X ±0.30
					SHEET: 1 / 1		X.XX ±0.10
					REV.: C		X° ±1°