

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A1		10/27-23	update the drawing	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Circuit diagram







Electrical IEC60947-7-1 cULus

- Voltage rating: 500V 300V
- Current rating: 17.5A 15A
- Wire range: 0.20-1.5mm² AWG26-14
- Wire strip length: 8-10mm
- Rated impulse withstanding voltage: 6KV
- Operating temperature: -40°C to +115°C
- Safety approval:

Rail Dimensions (mm)

For 35×7.5(H)

For 35×15(H)

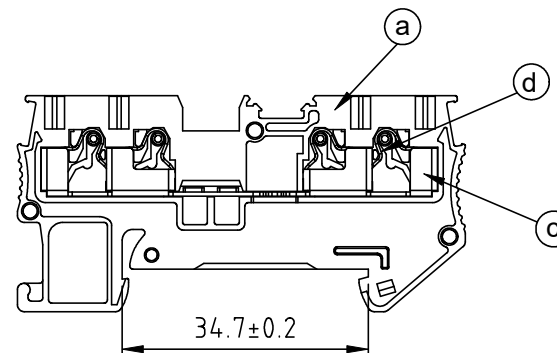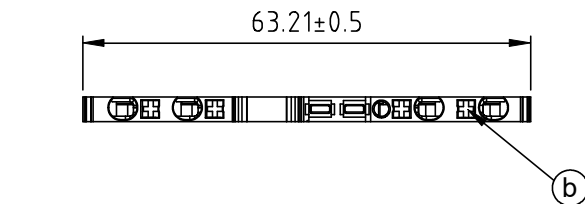

Logo

DXT S A 04 00 x 00 G

Body Color
2: Red
6: Blue
8: Grey

G RoHS compliant
(lead<4%)
In copper Alloy

NO.	Part Name	Material	QTY	Plating/Finish
a	Insulating body	Polyamide 66	1	
b	Button	POM	4	Orange
c	Terminal	COPPER	1	Tin plated
d	Spring	STAINLESS STEEL	4	

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	DXTSA 1.5 / 2-2						
PART NO.	DXTSA0400x00G			DWG NO.	8DXT0017		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 10/27-23	Chen Bo 09/13-23		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					SHEET: 01/01		X.XX ±0.10
					REV.: A1	X° ±1°	