


RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A1		10/27-23	update the drawing	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Circuit diagram








Electrical IEC60947-7-1 cULus

- Voltage rating: 800V 600V
- Current rating: 24A 20A
- Wire range: 0.20-2.5mm² AWG26-12
- Wire strip length: 8-10mm
- Rated impulse withstanding voltage: 8KV
- Operating temperature: -40°C to +115°C
- Safety approval: **CE**

Rail Dimensions (mm)

For 35×7.5(H)

For 35×15(H)

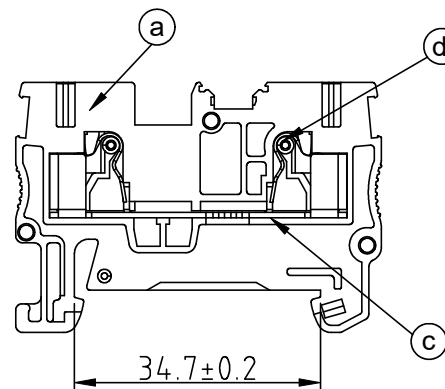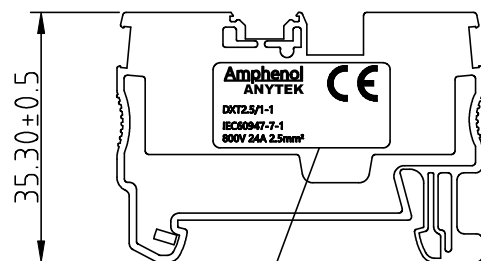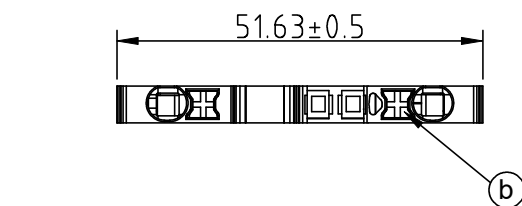

NO.	Part Name	Material	QTY	Plating/Finish
a	Insulating body	Polyamide 66	1	
b	Button	POM	2	Orange
c	Terminal	COPPER	1	Tin plated
d	Spring	STAINLESS STEEL	2	



Logo

DXT S B 02 00 x 00 G

Body Color
2: Red
6: Blue
8: Grey

G RoHS compliant
(lead<4%)
In copper Alloy

**Amphenol
ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		DXTSB 2.5 / 1-1			DWG NO.		8DXT0001	
PART NO.		DXTSB0200x00G			CUST NO.			
APPROVED		CHECKED	DESIGNED	DRAWN	Tolerance			
			Chen Bo 10/27-23	Chen Bo 10/20-22			UNIT: mm	X. ±0.50
					SHEET: 01/01		SCALE: NONE	X.X ±0.30
							REV.: A1	X.XX ±0.10
								X° ±1°