






RoHS Compliant

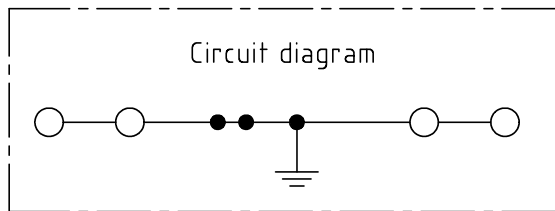


REV	SIGN	DATE	DESCRIPTION	APPROVER
A1		10/27-23	update the drawing	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Electrical IEC60947-7-2 cULus


- Wire range: 0.20-4mm² AWG24-10
- Wire strip length: 8-10mm
- Rated impulse withstanding voltage: 8KV
- Operating temperature: -40°C to +115°C
- Safety approval:

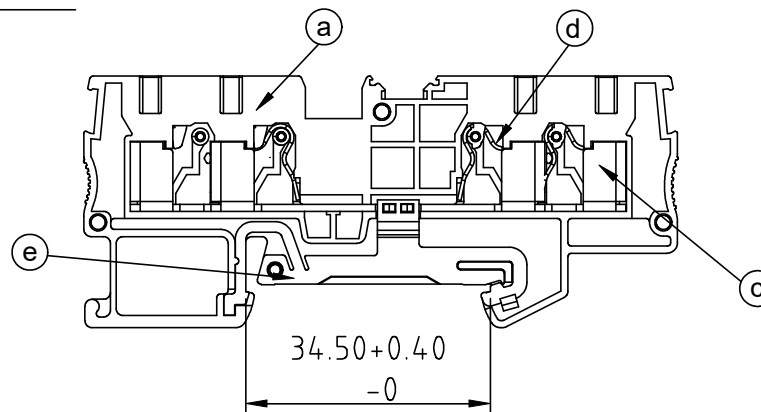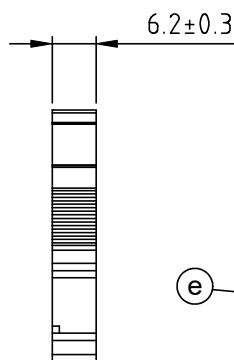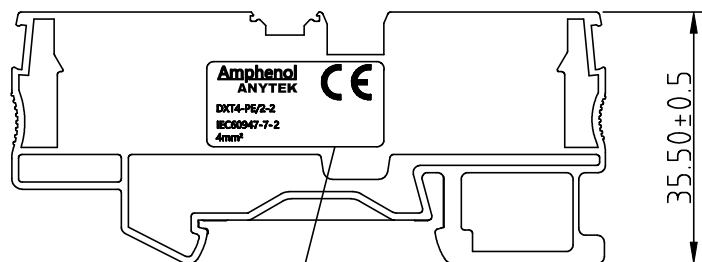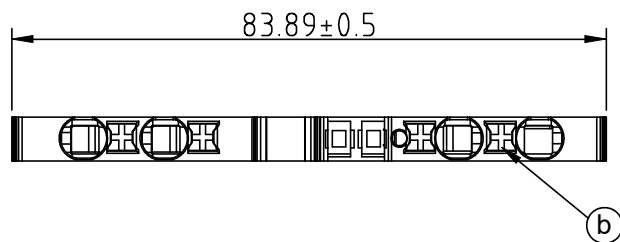

Rail Dimensions (mm)
For 35×7.5(H)
For 35×15(H)



NO.	Part Name	Material	QTY	Plating/Finish
a	Insulating body	Polyamide 66	1	
b	Button	POM	4	Orange
c	Terminal	COPPER	1	Tin plated
d	Spring	STAINLESS STEEL	4	
e	Ground Pin	Copper	1	Tin plated

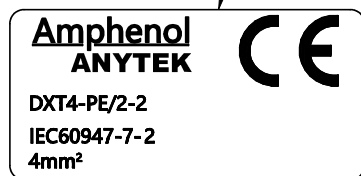

Logo

DXT S C 04 PE C 00 G

Body Color
C: Multiple

G RoHS compliant
(lead<4%)
In copper Alloy

**Amphenol
ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		DXTSC 4 / 2-2 -PE				
PART NO.		DXTSC04PEC00G		DWG NO.	8DXT0022	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Chen Bo 10/27-23	Chen Bo 09/14-23		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV: A1	X.XX ±0.10
						X° ±1°