

RoHS Compliant





REV	SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material

- Item① Terminal (housing): PA66 (UL94V-0)
- Item② Terminal (cover): PA66 (UL94V-0)
- Item③ Clamp: Brass(CuZn) Ni plated
- Item④ Terminal screw: Steel, Zinc plating "- " slot type
- Item⑤ Female contact: PhBz, Matte tin plated over Nickel plated

Electrical cULus (Group B/D)

- Voltage rating: 300V / 300V
- Current rating: 15A / 10A
- Wire range: 12-26AWG Str/Sol, Unprepared, 1 wire.
16-26AWG Str, Unprepared, 2 wires.
- Torque: 0.6Nm
- Screw: M3
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- UL Category Control Number: XCFR2/XCFR8
- Safety approval: cULus

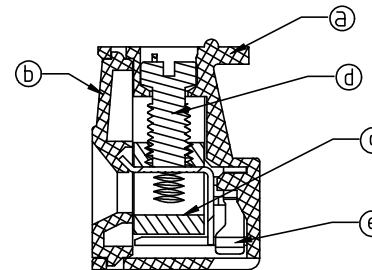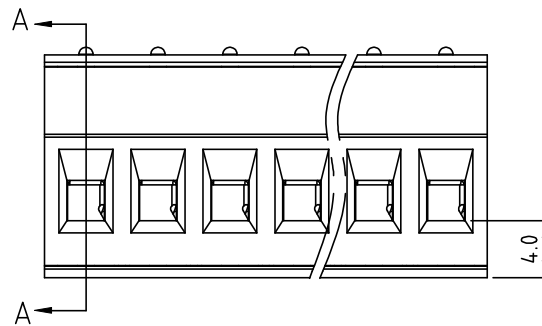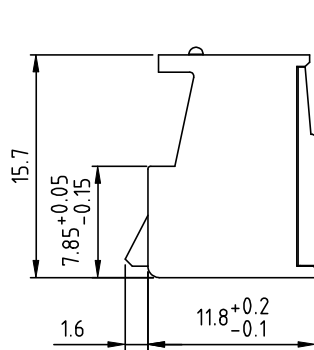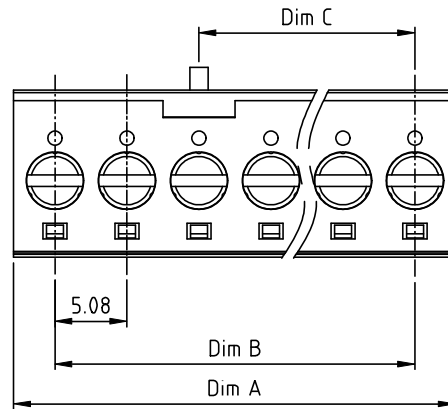

SECTION A-A


HU xx 0 1 x 0 xxxx G

No. OF POLES
02: 2 POLES
.....
08: 08 POLES

COLOR
0 Black (RAL9005)

G RoHS compliant (lead<4%)
In copper Alloy
0000 "®" Logo
... ..
Any special item by customer request, please contact sales department

Poles	Dim A	TOL	Dim B	TOL	Dim C	TOL
2P	10.92	±0.25	5.08	±0.20	5.08	±0.20
3P	16.00	±0.25	10.16	±0.20	10.16	±0.20
4P	21.08	±0.25	15.24	±0.20	10.16	±0.20
5P	26.16	±0.25	20.32	±0.20	10.16	±0.20
6P	31.24	±0.30	25.40	±0.20	15.24	±0.20
7P	36.32	±0.30	30.48	±0.25	15.24	±0.20
8P	41.40	±0.30	35.56	±0.25	20.32	±0.20

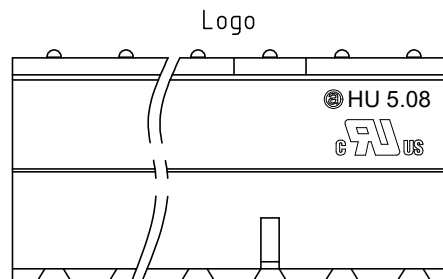

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	HU 5.08 2P-8P						
PART NO.	HUxx01x0xxxxG			DWG NO.	8HU0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Chen Bo 07/25-24	Chen Bo 06/13-24			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
				SHEET: 01/02		REV.: A1	X.XX ±0.10
							X° ±1°

