
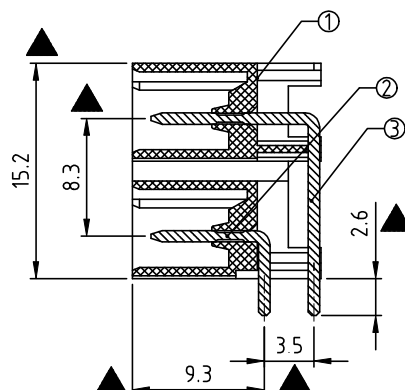


RoHS Compliant

SIGN	DATE	DESCRIPTION	APPROVER
B	2019.11.07	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			


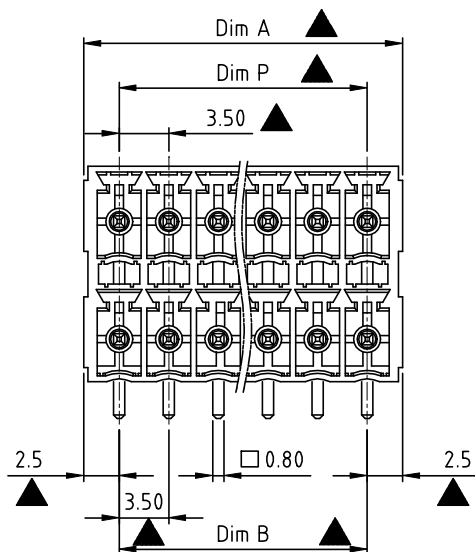


Material:

- Item ① Terminal(housing): High temp. polyamide (UL94V-0)
- Item ② Contact pin of short: copper Tin plated
- Item ③ Contact pin of long: copper Tin plated

Electrical:

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +110°C
- Reflow Soldering temperature: 260°C/10 Sec. Max.
- APPROVAL:
- Critical dimension:

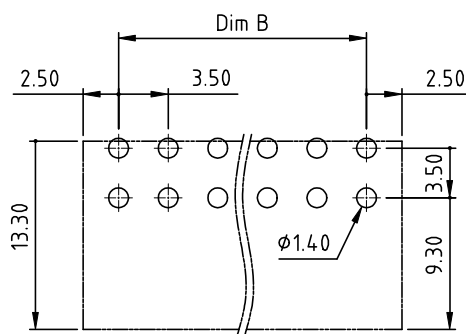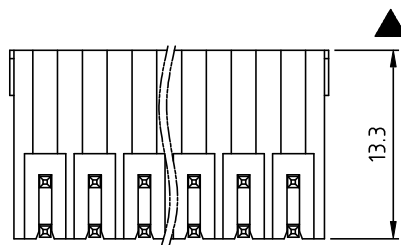

PCB Layout

KE xx 1 A x 1 xxxx G

No. OF POLES

04: 2x2 POLES

06: 2x3 POLES

...

32: 2x16 POLES

COLOR

0: BLACK

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

N=NUMBER OF POLES

DIM		TOL		
		2x2P--2x6P	2x7P--2x12P	2x13P--2x16P
Dim A	(N/2-1)×3.5+5.0	±0.15	±0.20	±0.25
Dim B	(N/2-1)×3.5			
Dim P	(N/2-1)×3.5			

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 3.5mm W/O Flange Series (Right angle) THR type						
PART NO.	KExx1Ax1xxxxG			DWG NO.	8KE0426		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Guoxue 2019.11.07	Guoxue 2019.11.07		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
						X.XX	±0.10
						X°	±1°
				SHEET: 01/01	REV.: B		