

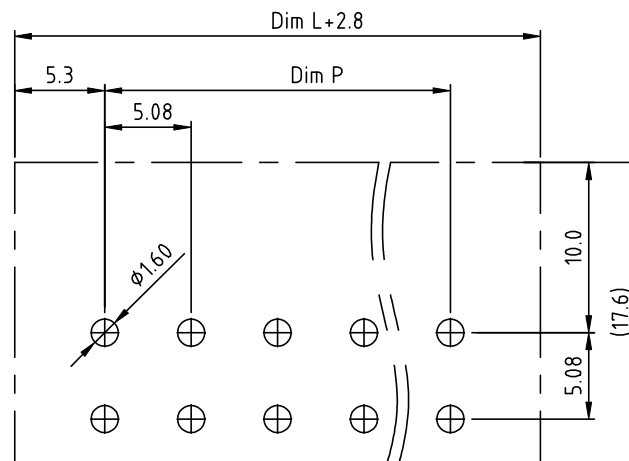
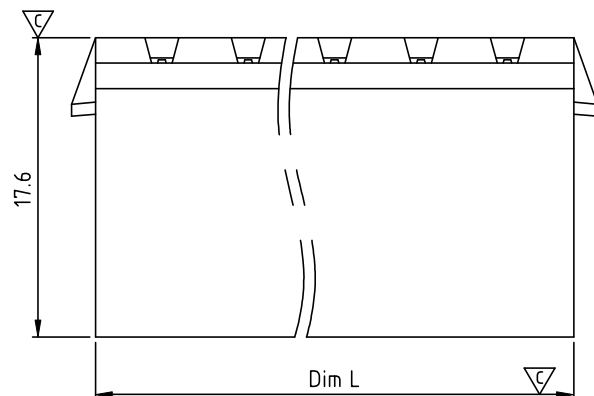


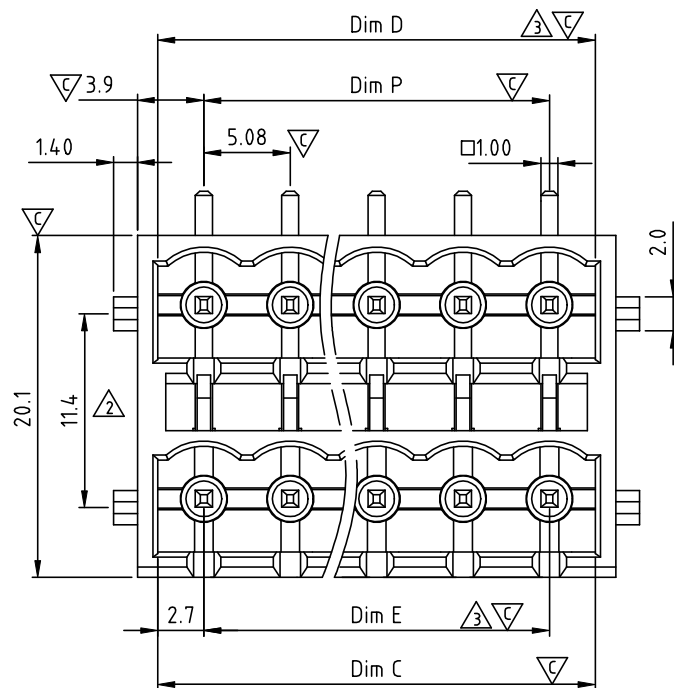

PCB Layout

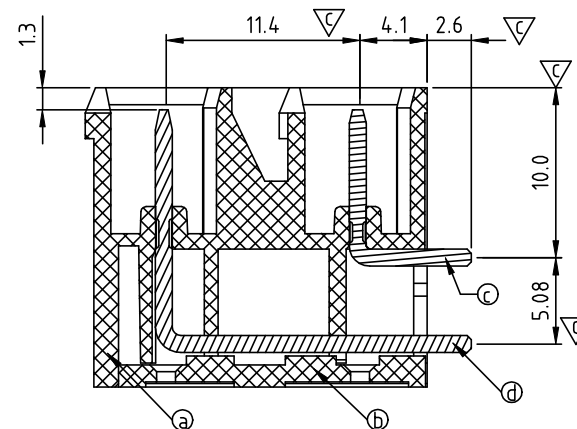

Poles	Dim L	Dim P	Dim C	Dim D	Dim E
2x2-2x6p	±0.15	±0.15	+0.05 -0.05	+0.05 -0.05	±0.15
2x7-2x12p	±0.25	±0.25	+0.10 -0.05	+0.10 -0.05	±0.25
2x13-2x18p	±0.35	±0.35	+0.20 -0.05	+0.20 -0.05	±0.35
2x19-2x24p	±0.40	±0.40	+0.25 -0.10	+0.25 -0.10	±0.40

N = Number of poles
 Dim L=Nx5.08+2.72
 Dim P=(N-1)x5.08
 Dim C=(N-1)x5.08+5.4
 Dim D=(N-1)x5.08+5.4
 Dim E=(N-1)x5.08

SIGN	DATE	DESCRIPTION	APPROVER
△	03/29`12	Add is cULus	Chen Bo
△	03/29`12	The dimension is changed from 11.40mm to 11.4mm	Chen Bo
△	03/29`12	The dimension D & E are added	Chen Bo

Material:

- Item a Terminal(housing): Thermoplastic (UL94V-0)
- Item b Terminal(cover): Thermoplastic (UL94V-0)
- Item c Male contact pin of short: Copper Tin plated
- Item d Male contact pin of long: Copper Tin plated

Electrical:

cULus

- Voltage rating: 300V
- Current rating: 12A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ±10°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ∇

KE xx 5 3 x 3 xxxx G

No. OF POLES

04: 2x2 POLES
 06: 2x3 POLES

48: 2x24 POLES

G RoHS compliant
 (lead<4%)
 In copper Alloy

COLOR 0000: "@" Logo (Standard)
 000A: "ANYTEK" Mark

Any special item by
 customer request.
 please contact sales
 department.

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 5.08mm With latch holder Series (Right angle) DIP TYPE					
PART NO.	KExx53x3xxxxG			DWG NO.	8KE0211	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Chen Bo 03/29`12	Chen Bo 03/29`12		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
				SHEET: 01/01	REV.: C	X° ±1°