

SIGN	DATE	DESCRIPTION	APPROVER
△	03/29`12	Add is cULus	Chen Bo
△	03/29`12	The dimension C & D & E are added	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item a Terminal(housing): Thermoplastic (UL94V-0)
- Item b Terminal(cover): Thermoplastic (UL94V-0)
- Item c Male contact pin : Copper Tin plated

Electrical:

- cULus
- Voltage rating: 300V
- Current rating: 12A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec

- △ Safety Approval: cULus
- Critical dimension: ∇

KE xx 7 3 x 2 xxxx G

No. OF POLES
04: 2x2 POLES
06: 2x3 POLES
:
48: 2x24 POLES





COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

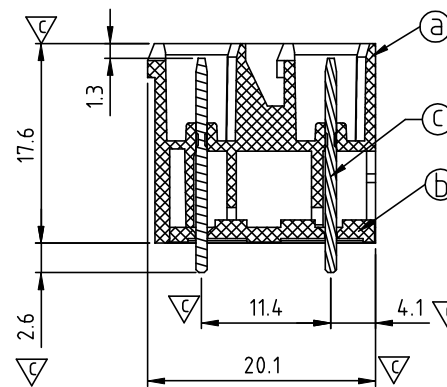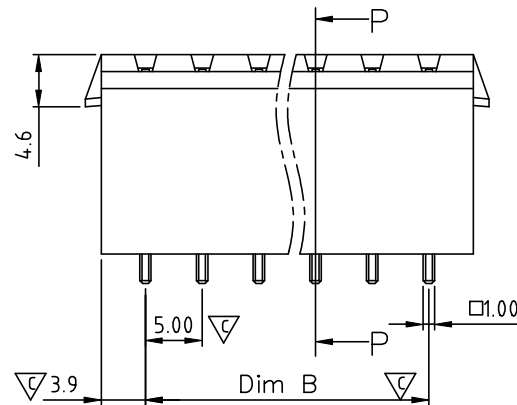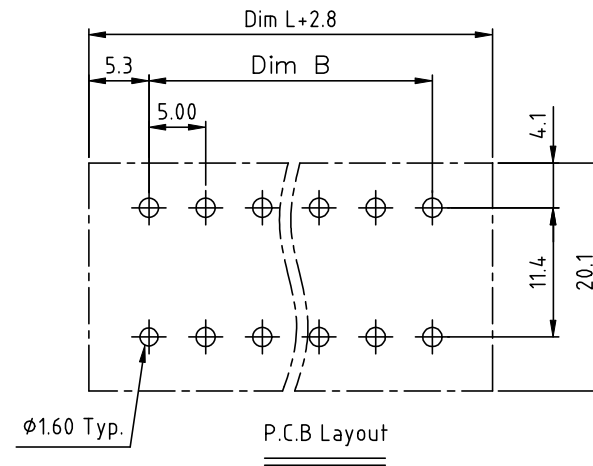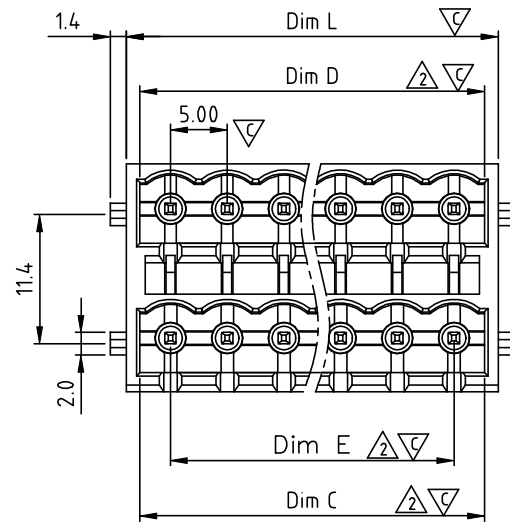

SECTION
P=P

N = Number of poles
Dim L=N×5.0+2.8
Dim B=(N-1)×5.0
Dim C=(N-1)×5.0+5.4
Dim D=(N-1)×5.0+5.4
Dim E=(N-1)×5.0

Poles	Dim L	Dim B	Dim C	Dim D	Dim E
2×2-2×6p	±0.15	±0.15	+0.05 -0.05	+0.05 -0.05	±0.15
2×7-2×12p	±0.25	±0.25	+0.10 -0.05	+0.10 -0.05	±0.25
2×13-2×18p	±0.35	±0.35	+0.20 -0.05	+0.20 -0.05	±0.35
2×19-2×24p	±0.40	±0.40	+0.25 -0.10	+0.25 -0.10	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 5.0mm With latch holder Series 2x2P-2x24P (180°-Vertical) DIP type					
PART NO.	KExx73x2xxxxG			DWG NO.	8KE0106	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Chen Bo	Chen Bo		UNIT: mm	X. ±0.50
		04/14`12	04/14`12		SCALE: NONE	X.X ±0.30
					SHEET: 01/01	X.XX ±0.10
					REV.: C	X° ±1°