
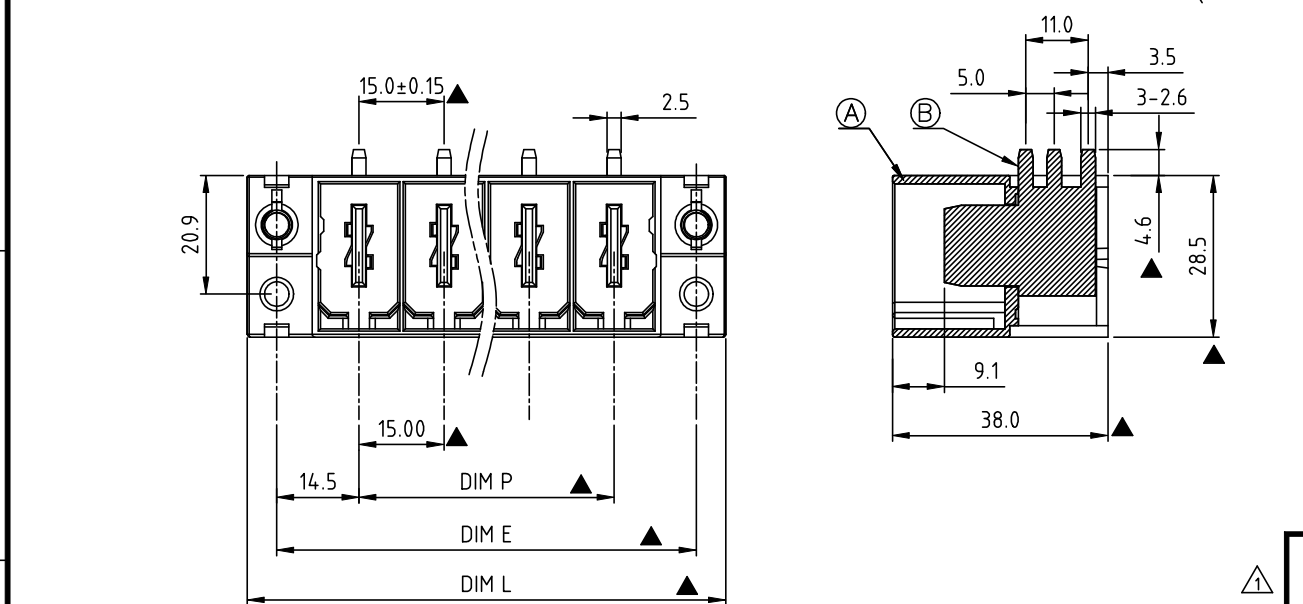


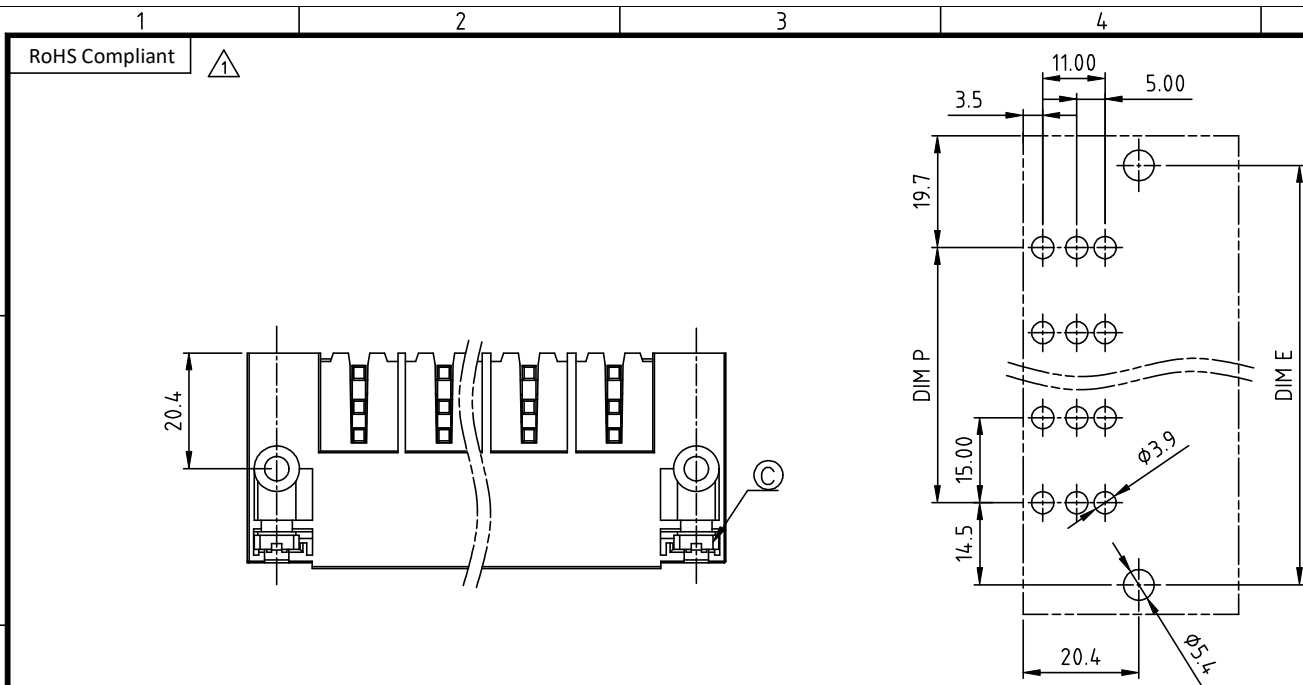

POLE	2	3	4	5	6	7	8	9	10
Dim.E	44.0	59.0	74.0	89.0	104.0	119.0	134.0	149.0	164.0
Dim.L	54.4	69.4	84.4	99.4	114.4	129.4	144.4	159.4	174.4
Dim.P	15.0	30.0	45.0	60.0	75.0	90.0	105.0	120.0	135.0
Tol.	±0.20			±0.35			±0.50		

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		05/03-11	Initial release	Runner
C	△	05/13-20	Add RoHS Compliant, and Amphenol Logo	Chen Bo
	△	05/13-20	Change the symbol of critical dimension	Chen Bo
	△	05/13-20	add cULus safety certification mark	Chen Bo
	△	05/13-20	add the colour code,	Chen Bo
	△	05/13-20	update the wave soldering temperature	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

- Material:
- Item ① Terminal housing: PBT (UL94V-0)
 - Item ② Male contact : Copper. Gold plated.
 - Item ③ With flange nut: Steel zinc plated.
- Electrical:
- Voltage rating: 600 V
 - Current rating: 115 A
 - Withstanding Voltage: 2.2 KV
 - Operating temperature: -40°C to +115°C
 - Wave soldering temperature: 260°C±5°C/5 Sec
- ⑤ ● APPROVAL: cULus
- ② ● Critical dimension: ▲

KU xx C 1 x 1 xxxx G

No. OF POLES
02: 2 POLES
:
10: 10 POLES

④
COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant (lead<4%)
In copper Alloy
0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		KU 15.0mm Body Series (Right angle) with flange 2P-10P			
PART NO.		KUxxC1x1xxxxG		DWG NO.	8KU0003
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 05/13-20	Chen Bo 05/13-20		
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
					X.XX ±0.10
					X° ±1°

SHEET: 01/01 REV.: C