

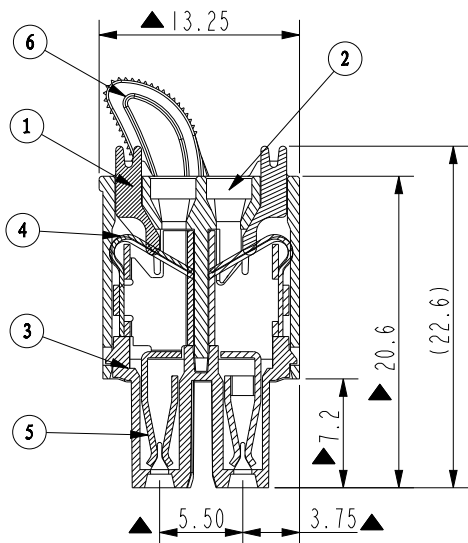
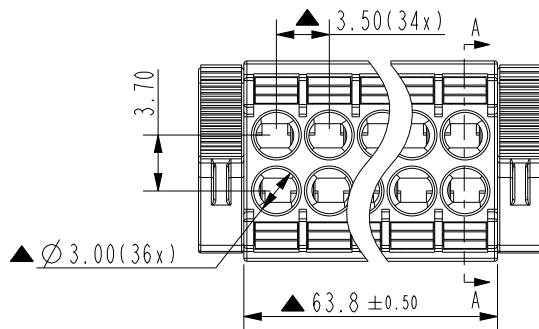




ROHS Compliant

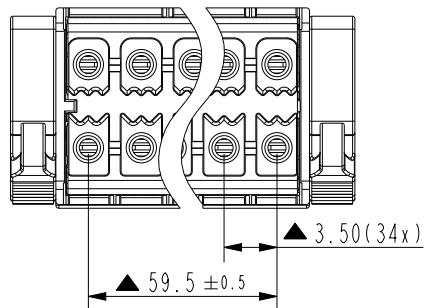

A-A

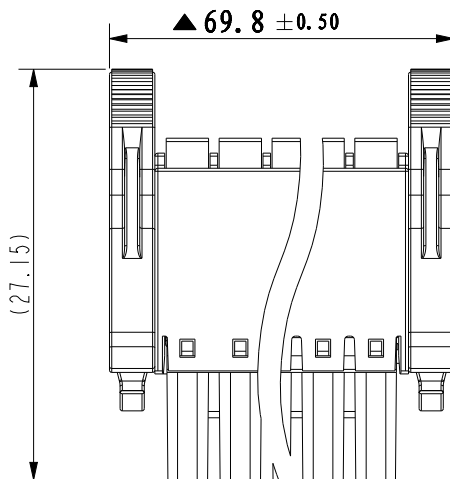

LOCKING



RELEASING

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	10/27'20	The first release	Johnson
C	△	1/11'23	Lever changed material from PBT to POM	Johnsom
THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!				

Material
△ Item ① Lever: POM (UL94 HB) Orange (RAL2011/P)
Item ② Top housing: Thermoplastic (UL94V-0)
Item ③ Down housing: Thermoplastic (UL94V-0)
Item ④ Spring clamp : Stainless steel
Item ⑤ contact : PhBz (CuSn) Matten Tin Plated.
Item ⑥ Operating lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)

Electrical
Voltage rating: 300V
Current rating: 5.5A
Wire range:
Solid wire (AWG): 16-24
Stranded wire (AWG): 16-24
Wire strip length: 9-10mm
Withstanding Voltage: 1.6KV
Operating temperature: -40℃ to +115℃
Safety Approval: cULus
Critical dimension: ▲

NL 36 1 0 x 3 xxxx G

No. OF POLES
36: 2*18 poles

Body color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)
C Green (RAL 6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "0" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer
request please contact
sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE:		NL 3.5mm Series with operating lever				
PART NO.		NL3610x3xxxxG		DWG NO.	8NL3004	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Johnson	Johnson		UNIT: mm	X. ±0.5
		2023. 1. 11	2023. 01. 11	SHEET: 1 / 1	SCALE: 1: 1	X. X ±0.3
					REV.: C	X. XX ±0.1
						X' ±1°