


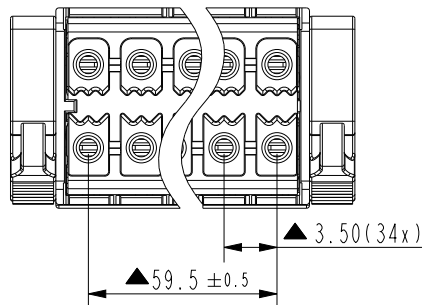
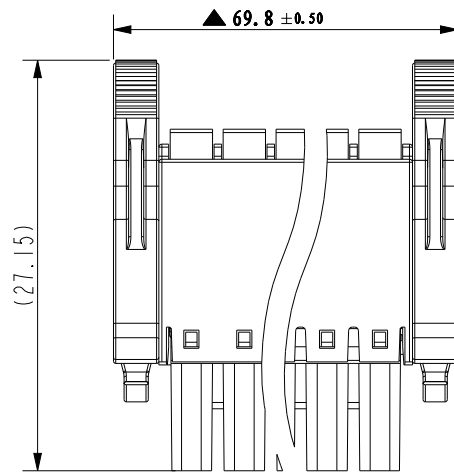
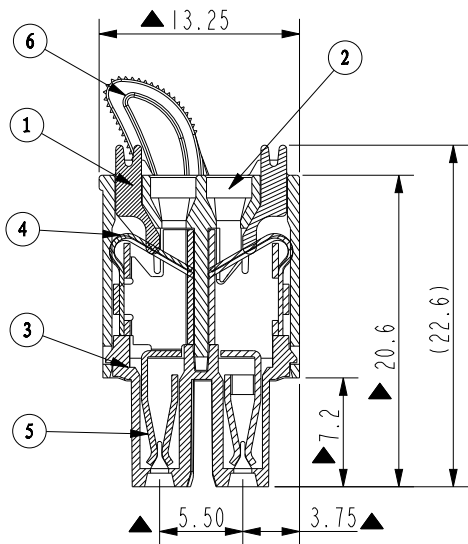


ROHS Compliant

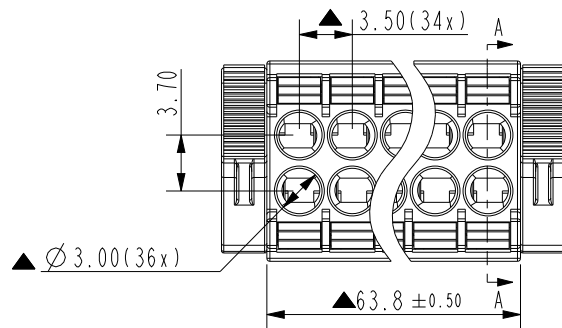

LOCKING



RELEASING

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	10/29'20	The first release	Johnson
C	△	1/11'23	Lever changed material from PBT to POM	Johnson
THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!				

Material

- △ Item ① Lever: POM (UL94 HB) Orange (RAL2011/P)
Item ② Top housing: Thermoplastic (UL94V-0)
Item ③ Down housing: Thermoplastic (UL94V-0)
Item ④ Spring clamp: Stainless steel
Item ⑤ contact: high-conductivity copper Bright Tin Plated.
Item ⑥ Operating lever: Thermoplastic (UL94V-0) Orange (RAL2011/P)

Electrical

Voltage rating: 300V
Current rating: 8A
Wire range:
Solid wire (AWG): 16-24
Stranded wire (AWG): 16-24
Wire strip length: 9-10mm
Withstanding Voltage: 1.6KV
Operating temperature: -40℃ to +115℃
Safety Approval: us
Critical dimension: ▲

NL 36 1 1 x 3 xxxxx G

No. OF POLES
36: 2*18 poles

Body color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)
C Green (RAL 6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "0" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer
request please contact
sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO
THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT
PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE:		NL 3.5mm Series with operating lever				
PART NO.	NL3611x3xxxxG			DWG NO.	8NL3005	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Johnson	Johnson			
		2023. 01. 11	2023. 01. 11	SHEET: 1 / 1	UNIT: mm	X. ±0.5
					SCALE: 1: 1	X. X ±0.3
					REV.: C	X. XX ±0.1
						X' ±1°