
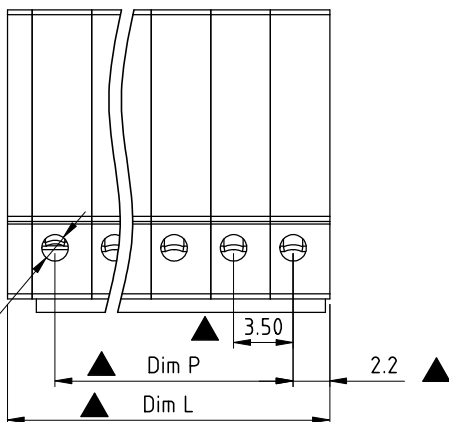


1

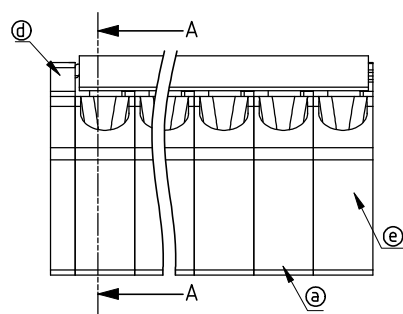

POLES	Dim L	Dim P
2p-6p	± 0.15	± 0.15
7p-12p	± 0.2	± 0.2
13p-18p	± 0.3	± 0.3
19p-24p	± 0.4	± 0.4

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Item ③ Insulating body: Thermoplastic (UL94V-0)
- Item ④ Insulating lever: Thermoplastic (UL94V-0) Orange RAL 2011/P
- Item ⑤ Spring clamp: Stainless steel Matte Tin plated.
- Item ⑥ Insulating cover : Thermoplastic (UL94V-0)
- Item ⑦ Terminal side body: Thermoplastic (UL94V-0)
- Item ⑧ Terminal Cover : Thermoplastic (UL94V-2)

- Voltage rating: 150V
- Current rating: 2A
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- Wire strip length: 9.0-10.0mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C

 ● Safety Approval: 

● Critical dimension: 

Body Color

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7004/P)

9 White(RAL1102)

C Multiple colors

0000 Standard @ Logo
000A Standard ANY Logo
p) Any special item by
A) customer request,
T) please contact sales
A) department.

RoHS compliant
➔ (lead<4%)
In copper Alloy

1

Amphenol **ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NY-3.5mm Series (with cover)						
PART NO.	NYxx10x1xxxxG			DWG NO.	8NY0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2019.06.12	Guoxue 2019.06.12		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
		SHEET: 01/01	REV: C	X.XX	±0.10		
						X°	±1°