
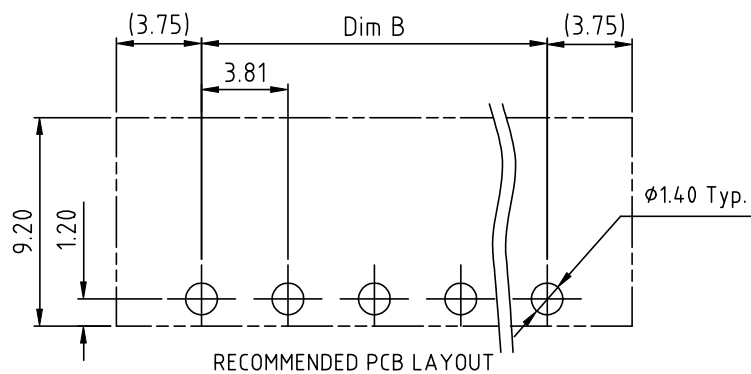
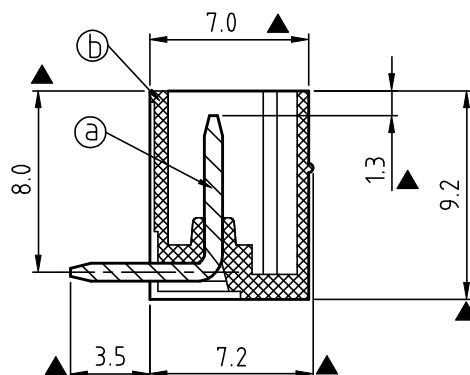
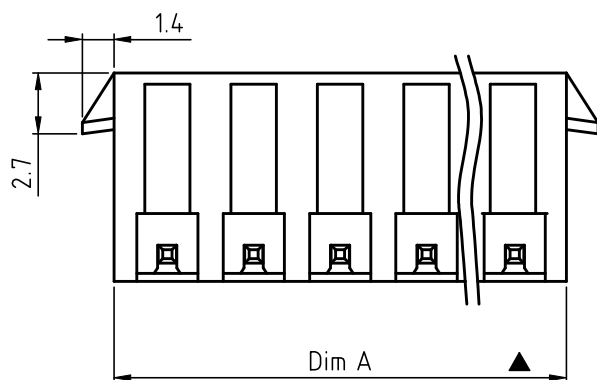


RoHS Compliant

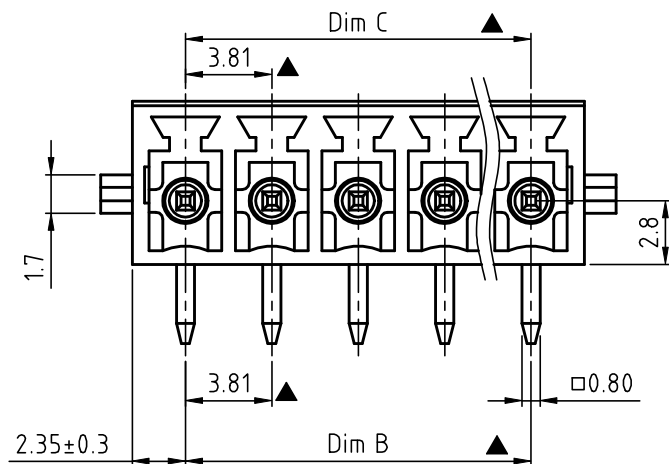

DIMENSION

Dim A	$(N-1) \times 3.81 + 4.70$
Dim B	$(N-1) \times 3.81$
Dim C	$(N-1) \times 3.81$

N= NUMBER OF POLES

Poles	Dim A/B/C Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-16P	±0.25
17P-24P	±0.35

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		04/12-17	Initial release	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ③ Male contact pin: Copper , Bright Tin plated over Nickel plated
- Item ④ Terminalhousing: Thermoplastic (UL94 V-0)

- Electrical: cULus /VDE
- Voltage rating: 300V/300V
 - Current rating: 10A/10.5A
 - Withstanding Voltage: 1.6 KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - Wave Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus VDE
 - Critical dimension: ▲

OQ xx 3 7 x 1 xxxx G

No. OF POLES

02: 2 POLES

24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.

**Amphenol
ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 3.81mm Series 90° (2P-24P) ---With hook				
PART NO.		OQxx37x10000G/OQxx37x1000AG		DWG NO.	80Q0633	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Chen Bo 06/24-20	Chen Bo 06/24-20		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	REV: R
						X° ±1°