

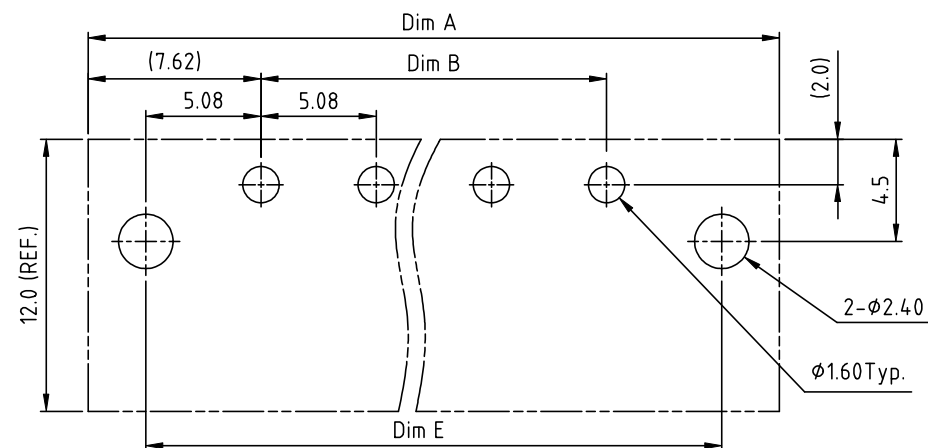
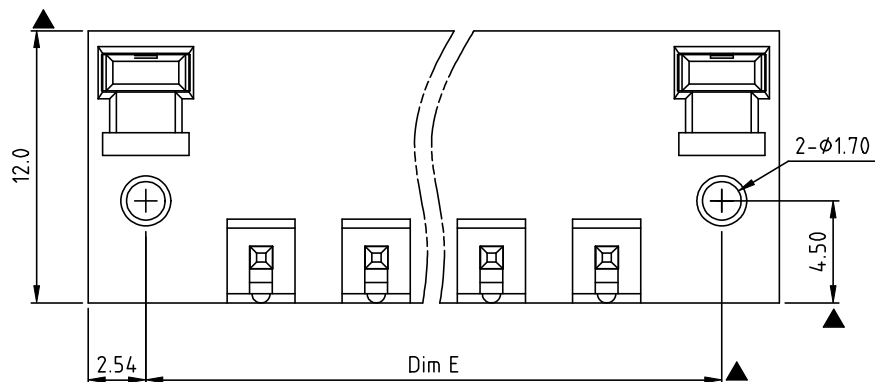



RoHS Compliant

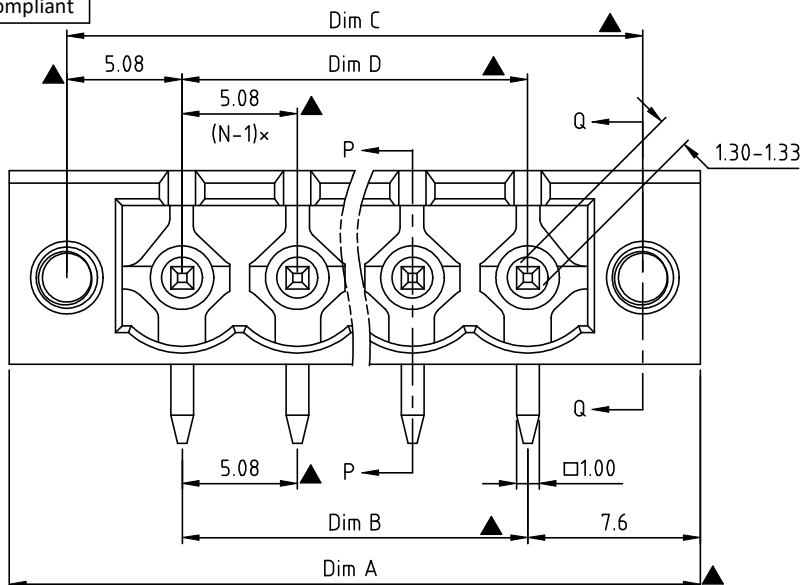

RECOMMENDED PCB LAYOUT

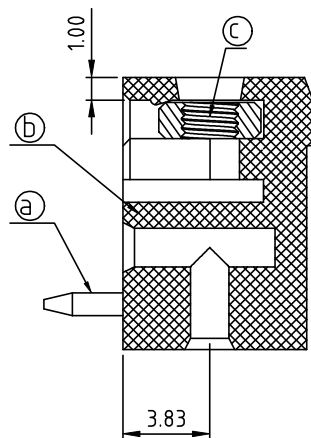

SECTION Q-Q

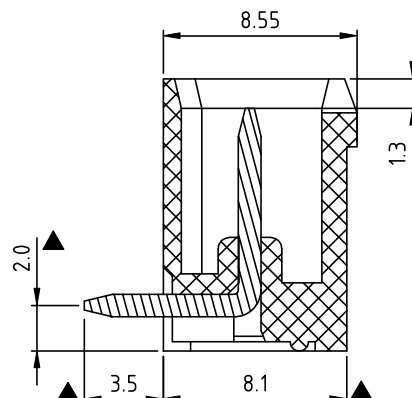

SECTION P-P

N= NUMBER OF POLES

Dim A	(N+2)×5.08
Dim B	(N-1)×5.08
Dim C	(N+1)×5.08
Dim D	(N-1)×5.08
Dim E	(N+1)×5.08

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.30
19P-24P	±0.40

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		06/13-18	Initial release	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Male contact pin: Copper Bright Tin plated over Nickel plated
- Item ② Terminal(housing): Thermoplastic (UL94V-0)
- Item ③ Flange nut: Steel zinc plating (M2.5)

Electrical:

- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: us
- Critical dimension: ▲

OQ xx 5 6 x 1 xxxx G

No. OF POLES

02: 2 POLES

24: 24 POLES

COLOR


- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 5.08mm 90° /WF Series 2p-24p (侧面装耳扣)				
PART NO.		OQxx56x1xxxxG/AG		DWG NO.	80Q07448	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Chen Bo 06/13-18	Chen Bo 06/04-18		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	REV: B
						X° ±1°