
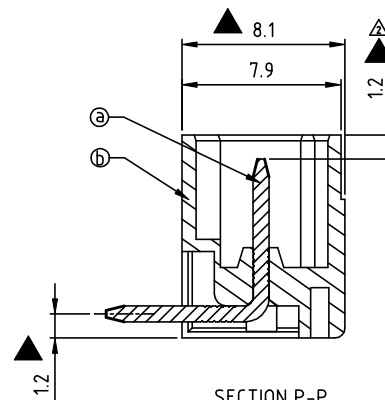

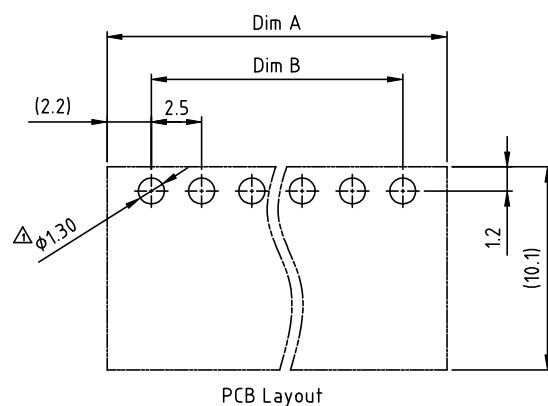
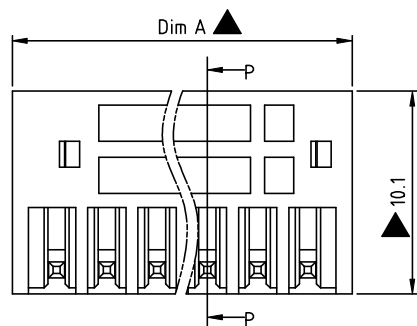


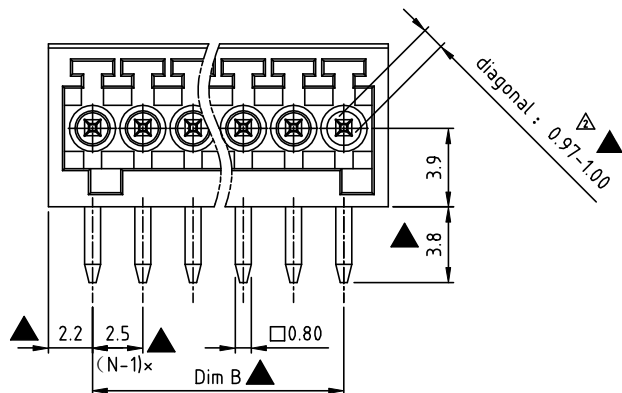

Dimension

Dim A	$N \times 2.5 + 1.9$
Dim B	$(N-1) \times 2.5$

N=Number of poles

Poles	Tolerance
2p-6p	± 0.10
7p-12p	± 0.15
13p-16p	± 0.20

Revision	SIGN	DATE	DESCRIPTION	APPROVER
B		2014.8.13	Initial release	CHENBO
C	△	2017.3.7	Change the PCB hloe from Dia 1.40to1.30	CHENMING
C	△	2017.3.7	add the diageral dimension 0.97-1.00 of pins	CHENMING

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ③ Male contact pin: Copper Tin plated
- Item ④ Terminal(housing): LCP (UL94V-0)

Electrical:

- cULus
- Voltage rating: 150V
- Current rating: 4A
- Withstanding Voltage: 1.3KV
- Operating temperature: -45°C to $+130^{\circ}\text{C}$
- Reflow soldering temperature: $260^{\circ}\text{C}/10$ Sec Max.
- Safety Approval: 
- Critical dimension: ▲

OQ xx B E x 1 xxxx G

No. OF POLES
02: 2 POLES
16: 16 POLES

Color
0 Black (RAL9005)

G RoHS compliant (lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 2.5mm 90° Series THT TYPE (LCP)						DWG NO.		80Q0505	
PART NO.		OQxxBEx1xxxxG				DWG NO.		80Q0505			
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance		
			CHENMING 2017.3.7	CHENMING 2017.3.7			UNIT: mm		X. ±0.50		
							SCALE: NONE		X.X ±0.30		
					SHEET: 01/01		REV: C		X.XX ±0.10		
								X° ±1°			

SHEET: 01/01