

Material

- Item **a** Clamp: Brass(CuZn) Ni plated
- Item **b** Terminal screw: Steel Zinc plating “-” slot type
- Item **c** Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item **d** Terminal (Cover): Thermoplastic (UL94V-0)
- Item **e** Terminal (Body): Thermoplastic (UL94V-0)
- Item **f** Handle: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: us
- Critical dimension: ▲

TJ xx 71 x 4 xxxx G

No. OF POLES

02 2 poles

03 3 poles

... 24 24 poles

Color

0 Black (RAL9005)

3 Orange(RAL 2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)
6 Blue (RAL 5015/A)




8 Grey(RAL7035/D)

9 White(RAL1102)

L Green(RAL6018/U)

— G RoHS compliant
(lead<4%)
In copper Alloy

000 0 Standard @ Logo
000 A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

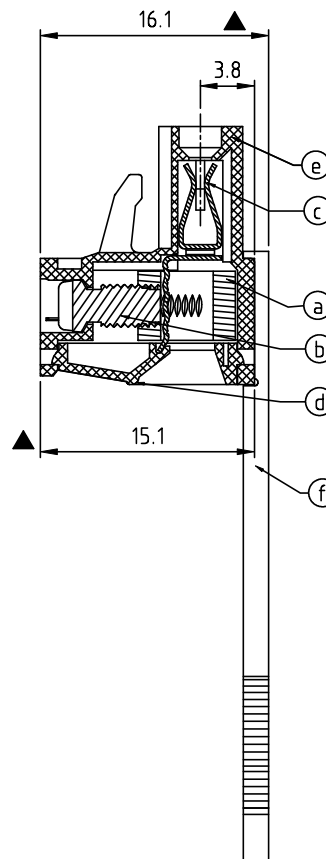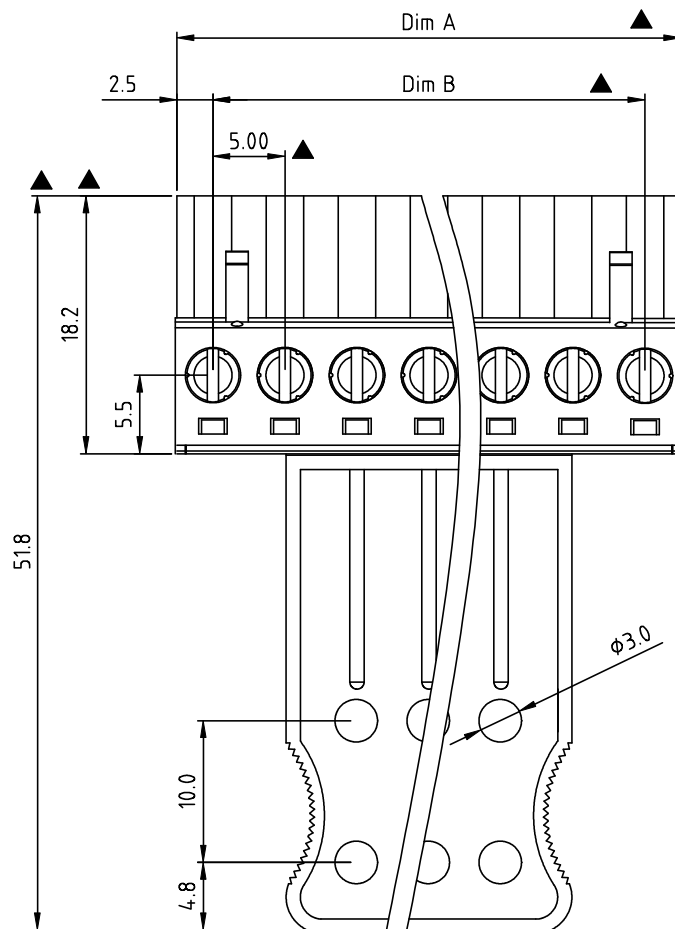

拉柄對應P數表

Poles	Dim A	Dim B
2-6p	± 0.20	± 0.15
7-12p	± 0.25	± 0.20
13-18p	± 0.30	± 0.25
19-24p	± 0.40	± 0.30

N = Number of poles
Dim A=Nx5.0
Dim B=(N-1)x5.0

TJ成品P數	拉柄P數
2P-4P	2P
5P-9P	5P
10P-15P	8P
16P-24P	12P

Amphenol **ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ 5.0mm Series with handle type						
PART NO.	TJxx71x4xxxxG			DWG NO.	8TJ0397		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Chen Bo 04/12-21	Chen Bo 11/20-17		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV.: F	X.XX	±0.10
						X°	+1°

Material

- Item ① Clamp: Brass(CuZn) Ni plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item ④ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ⑤ Terminal (Body): Thermoplastic (UL94V-0)
- Item ⑥ Handle: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus
- Critical dimension: ▲

TJ xx 51x 4 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

Color

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

000 0 Standard @ Logo
000 A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

拉柄對應P數表




TJ成品P數	拉柄P數
2P-4P	2P
5P-9P	5P
10P-15P	8P
16P-24P	12P

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ 5.08mm Series with handle type			
PART NO.	TJxx51x4xxxxG			DWG NO.	8TJ00192
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 04/12-21	Chen Bo 04/12-21		Tolerance
					UNIT: mm
					SCALE: NONE
				SHEET: 01/01	REV.: D

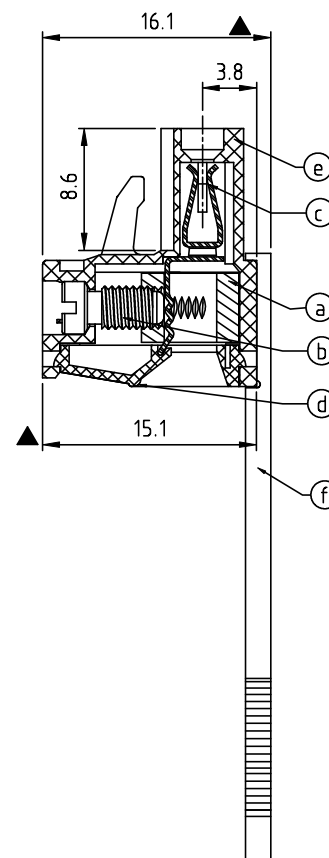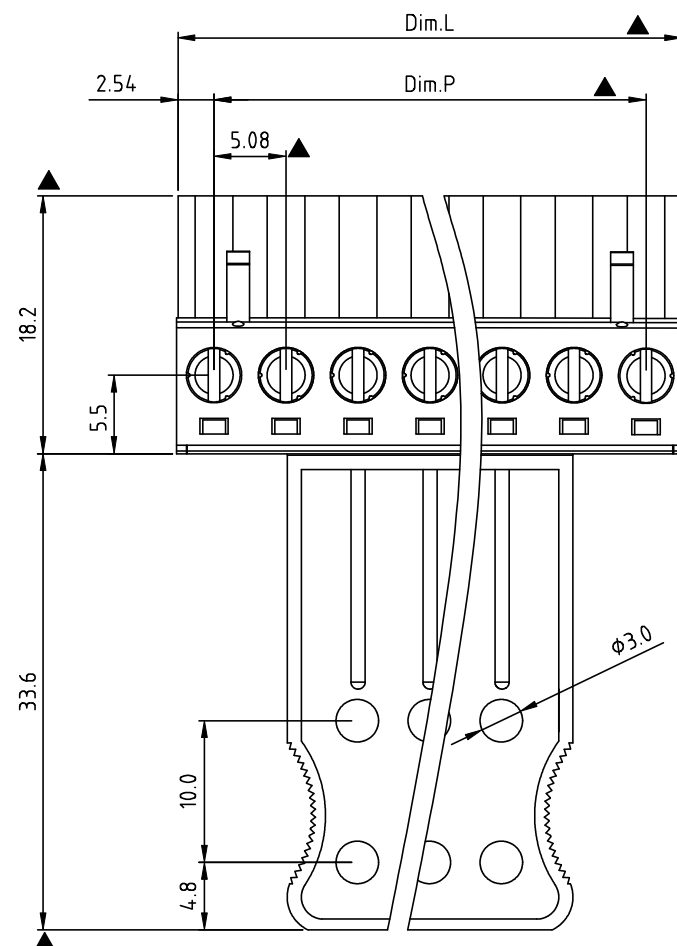

DIMENSION

Dim L	N×5.08
Dim P	(N-1)×5.08

N=Number of poles

Poles	Tolerance	
	DIM P	DIM L
2p-6p	±0.15	±0.15
7p-12p	±0.25	±0.25
13p-18p	±0.30	±0.30
19p-24p	±0.40	±0.40