
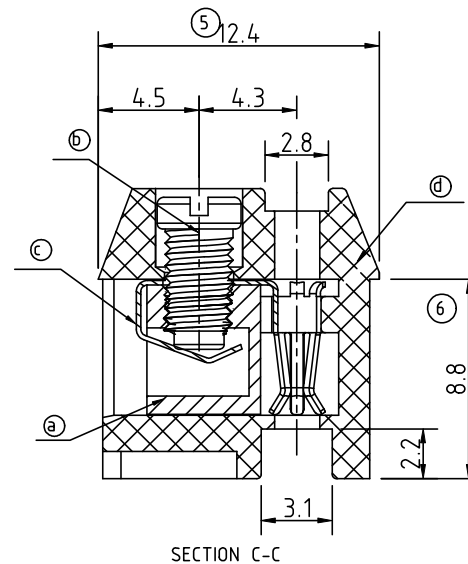
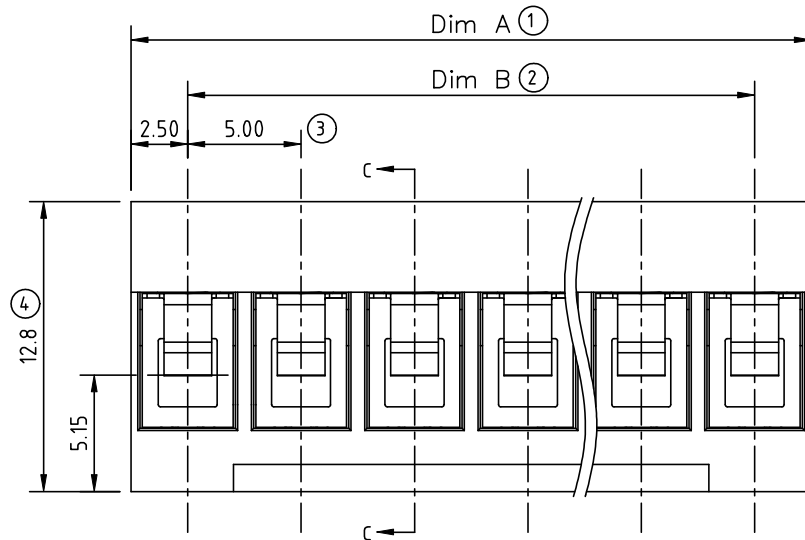


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.12.25	modify specification	Jacke
△	2010.03.29	The design is changed	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

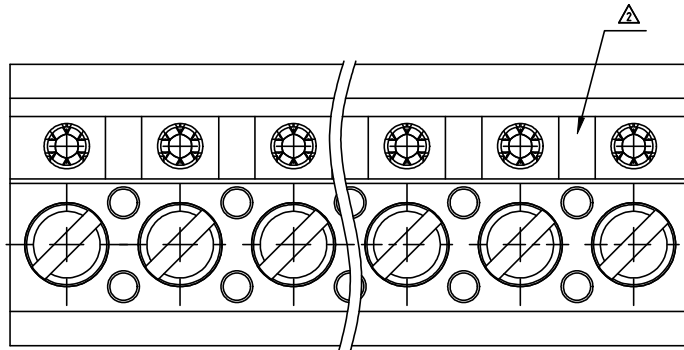

SECTION C-C

N = Number of poles
 Dim A=Nx5.0
 Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

Material

- Item a Clamp: Zinc Alloy Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz,tin plated
- Item d Terminal housing: Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-26
- Stranded wire(AWG): 12-26
- Torque: 3.5Lb-In
- Screw: M3.0
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-40°C to+115°C

TX xx 03x0 xxxx G

02	2 CONTACTS	0	Black
03	3 CONTACTS	5	Green(RAL 6018/T)
...	...	6	Blue
24	24 CONTACTS	8	Grey(RAL 7035/D)
		C	Green (RAL 6018/U)

RoHS
Pb<40,000ppm

0000 Standard @ Logo
 000A Standard ANY Logo
 Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TX-5.0mm Series "-" Zinc Alloy			
PART NO.	TXxx03x0xxxxG			DWG NO.	8TX0101
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Jacke 2010.03.29	Jacke 2009.12.25		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
				SHEET: 01/01	X° ±1°