

SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

SU Series

Technical Data

Material:

Pin (outer sleeve) : Brass,machined, CuZn38Pb2
Clip(contact 6 finger): Beryllium copper,heat treated or PHBZ
Plating(outer sleeve) : Tin plated : 2um/80u"nickel,5um/200u"Tin
Plating(contact) : 2um/80 u"nickel,gold or Tin plating
Insulator body(housing) : PPS. UL94V-0

Electrical

Current rating : 3 Amps/contact max.
Current resistance : 4m /contact.
Insulation resistance : 10000M at 500VAC
Rated voltage : 100VRMS /150Vdc

Mechanical

Operating temperature : Gold plated: -55°C to +125°C
(Continuous) Tin plated: -40°C to +105°C
Average insertion force: <140g
With steel pin of Ø 0.66mm or SQ 0.64mm
Average withdrawal force: >25g
With steel pin of Ø 0.66mm or SQ 0.64mm
Mechanical life: min.200

Environmental data


Solderability (IEC 60068-2-20. Ta) :235°C, 2s
Resistance to soldering heat (IEC 60068-2-20. Tb) :
-Through hole mount components :260°C, 10s

SU - XX 1 0 X 0 XXXXG


No.of contacts :02~80

pin plated: Code	Clip plated	Pin plated	0000	Standard
0	Gold Flash	Tin 200u"	18H0	Clip 5218 HY ROHS
1	Gold 10u"	Tin 200u"		
2	Gold 30u"	Tin 200u"		
3	Tin 200u"	Tin 200u"		
4	Gold flash	Gold flash		
5	Gold 10u"	Gold flash		
6	Gold 30u"	Gold flash		

N=The number of contacts

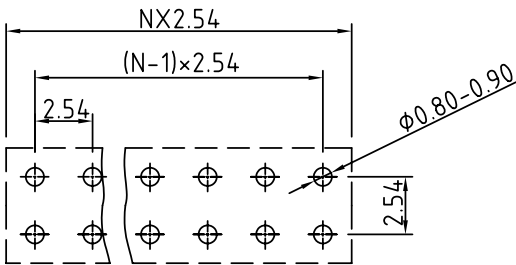

P.C.B. LAYOUT

ANYTEK				CUSTOMER COPY			
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE		SU Double row Series(10.0mm Pin)					
PART NO.		SUXX10X0XXXXG		DWG NO.		8SU0101	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Joanna 2005.08.02	Joanna 2005.08.02	<div><div></div><div>UNIT: mm</div><div>SCALE: NONE</div></div>		X. ±0.50
				X.X ±0.30			
				X.XX ±0.10			
					SHEET: 01/01		REV: C
							X* ±1*