
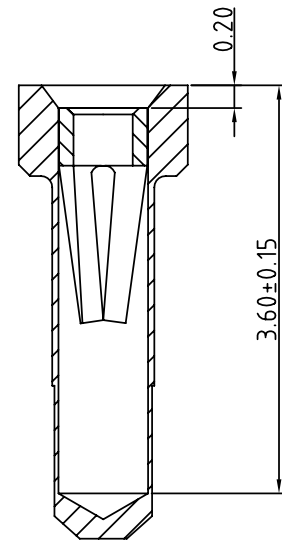
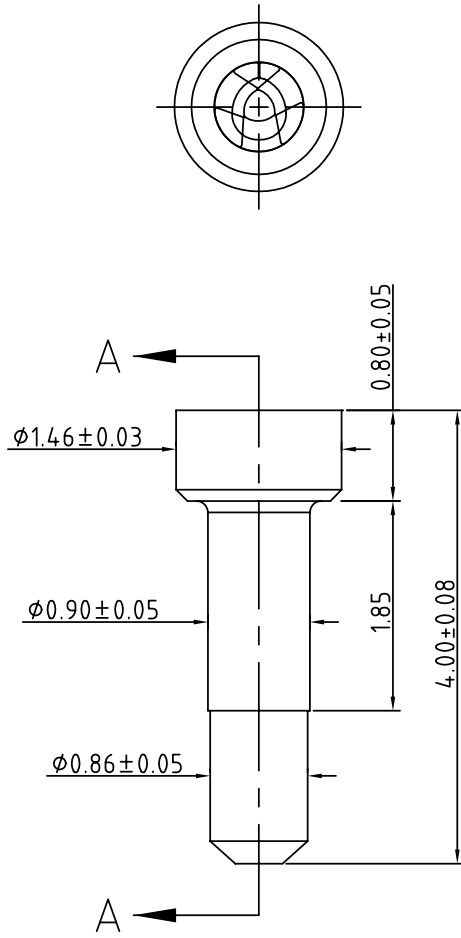


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



SECTION A-A

Material

- Pin (outer sleeve) : Brass,machined,CuZn38pB2
- Clip (contact 3 finger) : PhBz.heat treated
- Plating(Outer sleeve) : Tin plated:2ugm/80ug"nickel,5ugm/200ug"Tin
Gold plated;2ugm/80ug"nickel,Full gold flash
- Plating(contact) : 2ugm/80ug"nickel,gold or Tin plating(See TABLE4)
- Electrical
- Current rating : 3Amps/contact max.
- Contact resistance : <4mΩ/contact
- Mechanical
- Mechanical life : min.200

OK3000 X 00000G

Code	Clip plated	Pin plated
0	Gold flash	Tin 200u"
1	Gold 10u"	Tin 200u"
2	Gold 30u"	Tin 200u"
3	Tin 200u"	Tin 200u"
4	Gold flash	Gold flash
5	Gold 10u"	Gold flash
6	Gold 30u"	Gold flash
7	Gold 30u"	Gold 10u"

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OK Series 4.0mm (三爪(≠DT-3)				
PART NO.	OK3000x00000G			DWG NO.	80K0001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Seamus 2005.11.22	Aaron 2004.11.20		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV.: B	X.XX ±0.10
SHEET: 01/01				X° ±1°		