
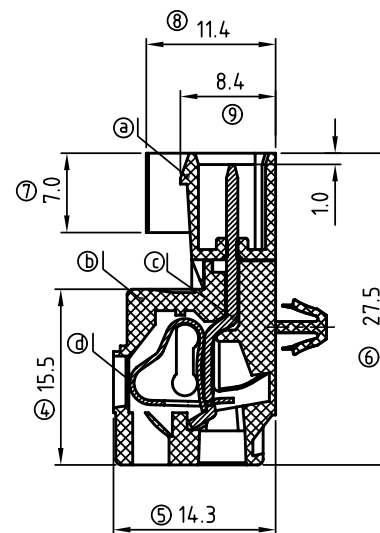


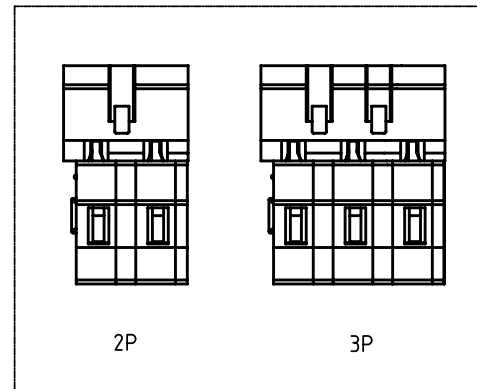

Material:

- Item a :Terminal body Thermoplastic (UL94 V-0)
- Item b :Terminal body Thermoplastic (UL94 V-0)
- Item c :Male contact pin: Brass Tin plated
- Item d :Spring clamp: Stainless steel
- Item e :Pad board: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

02	2 poles
03	3 poles
...	...
16	16 poles

0	Black
5	Green
6	Blue
8	Grey

(RAL 7035/D)

any special item by customer request, please contact sales department.

	Dim A	Dim B	Dim C
2-6p	± 0.20	± 0.20	± 0.10
7-12p	± 0.30	± 0.30	± 0.20
13-16p	± 0.40	± 0.40	± 0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NB 7.5mm snap-in mounting feet 100% protected against mismatching						
PART NO.	NBxxA0x5xxxxG			DWG NO.	8NB0306		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Runner 2010.06.10	Runner 2010.06.10		UNIT: mm	X.	±0.50
					SCALE: 2/1	X.XX	±0.30
					SHEET: 01/01	X°	±0.10
					REV: A	X°	±1°