

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material:




- Item a :Terminal body Thermoplastic (UL94 V-0)
- Item b :Terminal body Thermoplastic (UL94 V-0)
- Item c :Male contact pin: Brass Tin plated
- Item d :Spring clamp: Stainless steel
- Item e :Pad board: Thermoplastic ( UL94V-0 )

Electrical cULus

- Voltage rating: 300V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:


NB xx A 0 x 3 xxxxx G		
02 2 poles	0 Black	any special item by customer request, please contact sales department.
03 3 poles	5 Green	
... ..	6 Blue	
16 16 poles	8 Grey	
	(RAL 7035/D)	

SECTION A-A

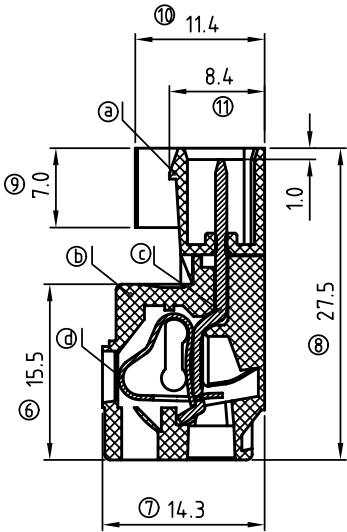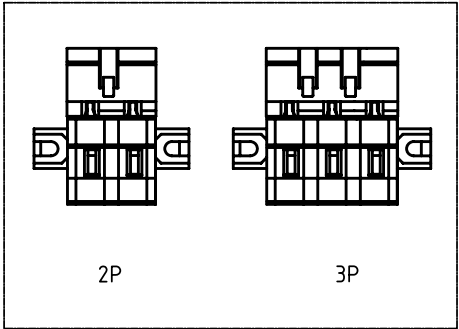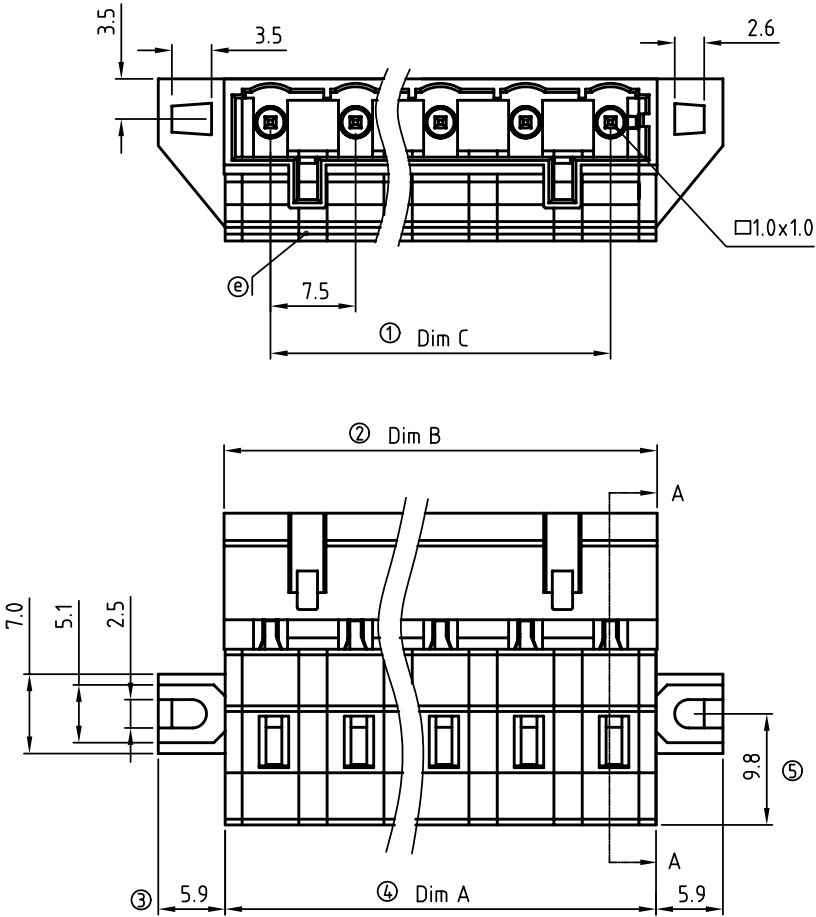

N = Number of poles  
 Dim A=Nx7.5+0.5  
 Dim B=Nx7.5+0.7  
 Dim C=(N-1)x7.5

	Dim A	Dim B	Dim C
2-6p	±0.20	±0.20	±0.10
7-12p	±0.30	±0.30	±0.20
13-16p	±0.40	±0.40	±0.30

ANYTEK				CUSTOMER COPY					
				ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD					
TITLE		NB 7.5mm series With flange 100% protected against mismatching							
PART NO.		NBxxA0x3xxxG		DWG NO.		8NB0304			
APPROVED		CHECKED	DESIGNED	DRAWN		CUST NO.		Tolerance	
			Runner 2010.06.10	Runner 2010.06.10				UNIT: mm	
								SCALE: 2/1	
						SHEET: 01/01		REV.: A	
								X. ±0.50	
								X.X ±0.30	
								X.XX ±0.10	
								X° ±1°	